

TEST REPORT

Applicant: Beijing XYZ Embodied AI Co., Ltd.
Address of Applicant: Building 5, Yard 3, Jinghai 5th Road, Tongzhou District, Beijing, China
Manufacturer: Beijing XYZ Embodied AI Co., Ltd.
Address of Manufacturer: Building 5, Yard 3, Jinghai 5th Road, Tongzhou District, Beijing, China
Equipment Under Test (EUT)
Product Name: Robot Domain Controller
Model No.: T5
Trade Mark: /
FCC ID: 2BV5O-T5
Applicable standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407
Date of sample receipt: March 17, 2026
Date of Test: March 25, 2026- June 11, 2026
Date of report issue: June 15, 2026
Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Robinson Luo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	June 15, 2026	Original

Tested By:

Josh. Cai

Date:

June 15, 2026

Test Engineer

Prepared By:

Jessie Lu

Date:

June 15, 2026

Project Engineer

Check By:

Robinson Lu

Date:

June 15, 2026

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	9
5.3 TEST FACILITY	9
5.4 TEST LOCATION	9
5.5 DESCRIPTION OF SUPPORT UNITS	10
5.6 DEVIATION FROM STANDARDS	10
5.7 ADDITIONAL INSTRUCTIONS	10
6 TEST INSTRUMENTS LIST	11
7 TEST RESULTS AND MEASUREMENT DATA	13
7.1 ANTENNA REQUIREMENT:	13
7.2 RADIATED EMISSION	14
8 TEST SETUP PHOTO	185
9 EUT CONSTRUCTIONAL DETAILS	185

4 Test Summary

Test Item	Section	Result
Antenna requirement	FCC part 15.203	PASS
AC Power Line Conducted Emission	FCC part 15.207	N/A
Emission Bandwidth	FCC part 15.407	PASS
Maximum Conducted Output Power	FCC part 15.407(a)(1)(8)	PASS
Power Spectral Density	FCC part 15.407(a)(1)(8)	PASS
Undesirable Emission	FCC part 15.407(b), 15.205/15.209	PASS
Radiated Emission	FCC part 15.205/15.209	PASS
Band Edge	FCC part 15.407(b)(1)	PASS
Frequency Stability	FCC part 15.407(g)	PASS
In-Band Emissions (Channel Mask)	FCC part 15.407(b)(7)	PASS
Contention-based protocol	FCC part 15.407(d)(6)	PASS

Remark:

1. Test according to ANSI C63.10:2020
2. Pass: The EUT complies with the essential requirements in the standard.
3. N/A: Not applicable.
4. This report is based on report TCWA24050010104/05 that the RF module is same, the EUT only changed the antenna. The EUT conducted data is refer to original report TCWA24050010104/05.

Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	RF conducted power	$\pm 0.75\text{dB}$
5	RF power density	$\pm 3\text{dB}$
6	Conducted Spurious emissions	$\pm 2.58\text{dB}$
7	AC Power Line Conducted Emission	$\pm 3.44\text{dB}$ (0.15MHz ~ 30MHz)
8	Radiated Spurious emission test	$\pm 3.1\text{dB}$ (9kHz-30MHz)
		$\pm 3.8039\text{dB}$ (30MHz-200MHz)
		$\pm 3.9679\text{dB}$ (200MHz-1GHz)
		$\pm 4.29\text{dB}$ (1GHz-18GHz)
		$\pm 3.30\text{dB}$ (18GHz-40GHz)
9	Temperature test	$\pm 1^\circ\text{C}$
10	Humidity test	$\pm 3\%$
11	Time	$\pm 3\%$

5 General Information

5.1 General Description of EUT

Product Name:	Robot Domain Controller
Model No.:	T5
Test sample(s) ID:	GTSL2026060093-1
Sample(s) Status:	Engineer sample
S/N:	XYZDCT5251101000023
Operation Frequency:	U-NII-1:5150~5250 U-NII-2A:5250~5350 U-NII-2C:5470~5725 U-NII-3:5725~5850 U-NII-5:5925~6425 U-NII-6:6425~6525 U-NII-7:6525~6875 U-NII-8:6875~7125
Modulation technology:	802.11a/n/ac/ax/be: OFDM 802.11ax/be: OFDMA
Antenna Type:	External Antenna
Antenna gain:	5150-5850MHz: Ant1:3.5dBi, Ant2:4.4dBi 5925-7125MHz: Ant1:3.6dBi, Ant2:4.0dBi
Power supply:	Input: DC12-24V, 200W POE: DC 48V

Disclaimer statement:

1. Antenna gain information provided by the customer, and the laboratory is not responsible for its authenticity.
2. The information in this section is provided by the applicant or manufacturer, GTS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

802.11a/n20/ac20/ax20/be20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	149	5745 MHz	153	5765 MHz
157	5785 MHz	161	5805 MHz	165	5825 MHz

802.11n40/ac40/ax40/be40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550 MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
151	5755 MHz	159	5795 MHz	--	--

802.11ac80/ax-HE8/be80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz
122	5610 MHz	155	5775 MHz	--	--

802.11a/ax20/be20

5925MHz ~ 6425MHz

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5955	5	5975	9	5995
13	6015	17	6035	21	6055
25	6075	29	6095	33	6115
37	6135	41	6155	45	6175
49	6195	53	6215	57	6235
61	6255	65	6275	69	6295
73	6315	77	6335	81	6355
85	6375	89	6395	93	6415

6425MHz ~ 6525MHz

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
97	6535	101	6455	105	6475
109	6495	113	6515	--	--

6525MHz ~ 6875MHz

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
117	6535	121	6555	125	6575
129	6595	133	6615	137	6635
141	6655	145	6675	149	6695

153	6715	157	6735	161	6755
165	6775	169	6795	173	6815
177	6835	181	1855	--	--

6875MHz ~ 7125MHz

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
189	6895	193	6915	197	6935
201	6955	205	6975	209	6995
213	7015	217	7035	221	7055
225	7075	229	7095	233	7115

802.11ax40/be40

5925MHz ~ 6425MHz

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	5965	11	6005	19	6045
27	6085	35	6125	43	6165
51	6205	59	6245	67	6285
75	6325	83	6365	91	6405

6425MHz ~ 6525MHz

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
99	6445	107	6485	--	--

6525MHz ~ 6875MHz

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
123	6565	131	6605	139	6645
147	6685	155	6725	163	6765
171	6805	179	6845	--	--

6875MHz ~ 7125MHz

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
195	6925	203	6965	211	7005
219	7045	227	7085	--	--

802.11ax80/be80

5925MHz ~ 6425MHz

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
7	5985	23	6065	39	6145
55	6225	71	6305	87	6385

6425MHz ~ 6525MHz

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
103	6465	--	--	--	--

6525MHz ~ 6875MHz

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
135	6625	151	6705	167	6785

6875MHz ~ 7125MHz

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
199	6945	215	7025	--	--

802.11ax80/be80

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
15	6025	47	6185	79	6345
111	6505	143	6665	175	6825
207	6985	--	--	--	--

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
-------------------	--

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Test Mode	Data Rate	*Power Level Setting
802.11a	6 Mbps	default
802.11n-HT20	MCS0	default
802.11n-HT40	MCS0	default
802.11ac-VHT20	MCS0	default
802.11ac-VHT40	MCS0	default
802.11ac-VHT80	MCS0	default
802.11ac-VHT160	MCS0	default
802.11ax-HE20	MCS0	default
802.11ax-HE40	MCS0	default
802.11ax-HE80	MCS0	default
802.11ax-HE160	MCS0	default
802.11be-EHT20	MCS0	default
802.11be-EHT40	MCS0	default
802.11be-EHT80	MCS0	default
802.11be-EHT160	MCS0	default

5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Designation Number: CN5029

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.

- **ISED—Registration No.: 9079A**

CAB identifier: CN0091

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of ISED for radio equipment testing .

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).

5.4 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480
Fax: 0755-27798960

5.5 Description of Support Units

Manufacturer	Description	Model	Serial Number
Lenovo	PC Host	M6900	EA05257893

5.6 Deviation from Standards

None.

5.7 Additional Instructions

Test Software	Special test command provided by manufacturer
Power level setup	Default

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Apr. 10, 2026	Apr. 09, 2027
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Apr. 10, 2026	Apr. 09, 2027
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	Apr. 11, 2026	Apr. 10, 2027
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	Apr. 11, 2026	Apr. 10, 2027
6	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	Jul. 11, 2025	Jul 10, 2026
7	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov.22, 2025	Nov.21, 2026
8	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	Apr. 10, 2026	Apr. 09, 2027
9	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	Apr. 10, 2026	Apr. 09, 2027
10	Horn Antenna (18GH-40GHz)	Schwarzbeck	BBHA 9170	GTS691	Apr. 11, 2026	Apr. 10, 2027
11	FSV·Signal Analyzer (10Hz-40GHz)	Keysight	FSV-40-N	GTS666	Mar. 10, 2026	Mar. 09, 2027
12	Amplifier	/	LNA-1000-30S	GTS650	Apr. 10, 2026	Apr. 09, 2027
13	CDNE M2+M3-16A	HCT	30MHz-300MHz	GTS692	Nov. 24, 2025	Nov. 23, 2026
14	Wideband Amplifier	/	WDA-01004000-15P35	GTS602	Apr. 10, 2026	Apr. 09, 2027
15	Thermo meter	JINCHUANG	GSP-8A	GTS643	Apr. 13, 2026	Apr. 12, 2027
16	RE cable 1	GTS	N/A	GTS675	Jul. 11, 2025	Jul. 10, 2026
17	RE cable 2	GTS	N/A	GTS676	Jul. 11, 2025	Jul. 10, 2026
18	RE cable 3	GTS	N/A	GTS677	Jul. 11, 2025	Jul. 10, 2026
19	RE cable 4	GTS	N/A	GTS678	Jul. 11, 2025	Jul. 10, 2026
20	RE cable 5	GTS	N/A	GTS679	Jul. 11, 2025	Jul. 10, 2026
21	RE cable 6	GTS	N/A	GTS680	Jul. 11, 2025	Jul. 10, 2026
22	RE cable 7	GTS	N/A	GTS681	Jul. 11, 2025	Jul. 10, 2026
23	RE cable 8	GTS	N/A	GTS682	Jul. 11, 2025	Jul. 10, 2026
24	EMI Test Software	AUDIX	E3-6.100614a	GTS725	N/A	N/A

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	Jul. 12, 2022	Jul. 11, 2027
2	EMI Test Receiver	R&S	ESCI 7	GTS552	Apr. 11, 2026	Apr. 10, 2027
3	LISN	ROHDE & SCHWARZ	ENV216	GTS226	Apr. 10, 2026	Apr. 09, 2027
4	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
5	Thermo meter	JINCHUANG	GSP-8A	GTS642	Apr. 14, 2026	Apr. 13, 2027
6	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	Apr. 11, 2026	Apr. 10, 2027
7	ISN	SCHWARZBECK	NTFM 8158	GTS565	Apr. 10, 2026	Apr. 09, 2027
8	High voltage probe	SCHWARZBECK	TK9420	GTS537	Apr. 10, 2026	Apr. 09, 2027
9	Antenna end assembly	Weinschel	1870A	GTS560	Apr. 10, 2026	Apr. 09, 2027
10	EMI Test Software	AUDIX	E3-6.100622	GTS726	N/A	N/A
11	Current probe	CYBERTEK	EM5011	GTS698	Jan. 27, 2026	Jan. 26, 2027

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	Apr. 10, 2026	Apr. 09, 2027
2	EMI Test Receiver	R&S	ESCI 7	GTS552	Apr. 11, 2026	Apr. 10, 2027
3	PSA Series Spectrum Analyzer	Agilent	E4440A	GTS536	Apr. 10, 2026	Apr. 09, 2027
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	Apr. 10, 2026	Apr. 09, 2027
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	Apr. 10, 2026	Apr. 09, 2027
6	Wideband Power Meter	Keysight	N1924A	GTS673	Apr. 11, 2026	Apr. 10, 2027
7	USB RF Power Sensor	DARE	RPR3006W	GTS569	Apr. 10, 2026	Apr. 09, 2027
8	RF Switch Box	Shongyi	RFSW3003328	GTS571	Apr. 10, 2026	Apr. 09, 2027
9	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	Apr. 10, 2026	Apr. 09, 2027
10	Thermo meter	JINCHUANG	GSP-8A	GTS641	Apr. 14, 2026	Apr. 13, 2027
11	EXA Signal Analyzer	Keysight	N9010B	MY60241168	Nov. 01, 2025	Oct. 31, 2026

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	KUMAO	SF132	GTS647	Jul. 16, 2025	Jul. 15, 2026


7 Test results and Measurement Data



7.1 Antenna requirement:

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
External antennas with MINI-FAKRA connector, and for 5150-5850MHz: Antenna1 gain :3.5dBi, Antenna2 gain:4.4dBi, for 5925-7125MHz: Antenna1 gain:3.6dBi, Antenna2 gain:4.0dBi	

7.2 Radiated Emission

Test Requirement :	FCC Part15 C Section 15.209 and 15.205																												
Test Method :	ANSI C63.10: 2020																												
Test Frequency Range:	9kHz to 40GHz																												
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																												
Receiver setup:	Frequency	Detector	RBW	VBW	Value																								
	9kHz-150KHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value																								
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value																								
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value																								
	Above 1GHz	Peak	1MHz	3MHz	Peak Value																								
		AV	1MHz	3MHz	Average Value																								
	Note: For Duty cycle ≥ 98%, average detector set as above For Duty cycle < 98%, average detector set as below: VBW ≥ 1 / T																												
Limit:	<table><tr><th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement distance (meters)</th></tr><tr><td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr><tr><td>1.705-30.0</td><td>30</td><td>30</td></tr><tr><td>30-88</td><td>100**</td><td>3</td></tr><tr><td>88-216</td><td>150**</td><td>3</td></tr><tr><td>216-960</td><td>200**</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>3</td></tr></table>					Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100**	3	88-216	150**	3	216-960	200**	3	Above 960	500	3
	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																										
	0.009-0.490	2400/F(kHz)	300																										
	0.490-1.705	24000/F(kHz)	30																										
	1.705-30.0	30	30																										
	30-88	100**	3																										
	88-216	150**	3																										
	216-960	200**	3																										
	Above 960	500	3																										
	The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.																												
Test Procedure:	Substitution method was performed to determine the actual ERP emission levels of the EUT. The following test procedure as below: 1>.Below 1GHz test procedure: 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported																												

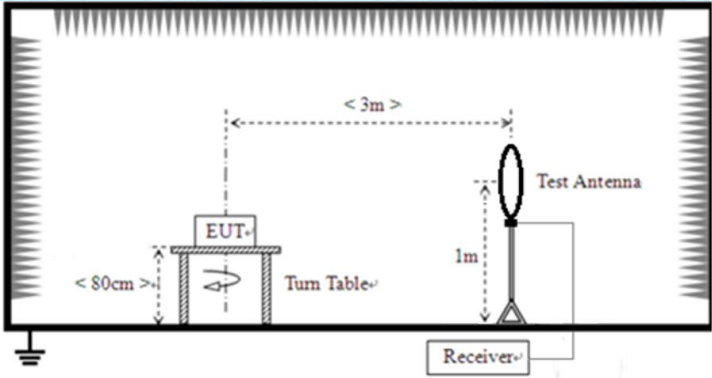	in a data sheet. 2>.Above 1GHz test procedure: 1. On the test site as test setup graph above,the EUT shall be placed at the 0.8m support on the turntable and in the position closest to normal use as declared by the provider. 2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter.The output of the test antenna shall be connected to the measuring receiver. 3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test. 4. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver. 5. Repeat step 4 for test frequency with the test antenna polarized horizontally. 6. Remove the transmitter and replace it with a substitution antenna 7. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output. 8. Repeat step 7 with both antennas horizontally polarized for each test frequency. 9. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula: $EIRP(dBm) = Pg(dBm) - \text{cable loss (dB)} + \text{antenna gain (dBi)}$ where: Pg is the generator output power into the substitution antenna.
Test setup:	For radiated emissions from 9kHz to 30MHz  For radiated emissions from 30MHz to 1GHz

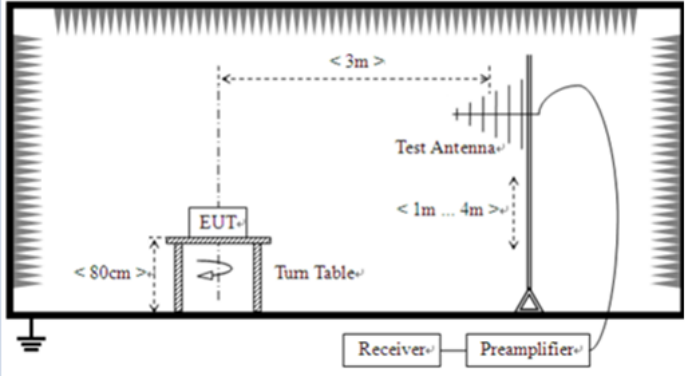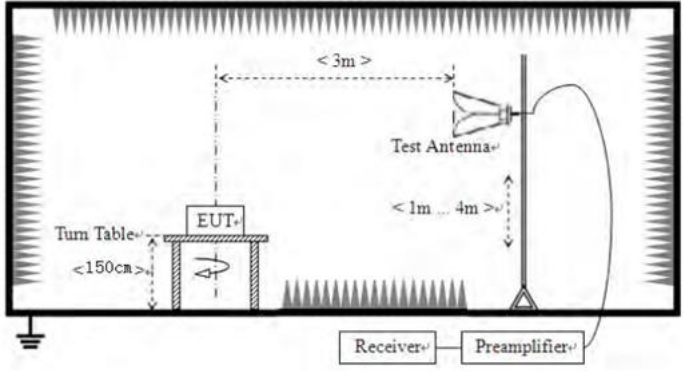		For radiated emissions above 1GHz					
							
Test Instruments:	Refer to section 6.0 for details						
Test mode:	Refer to section 5.2 for details						
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar	
Test voltage:	DC 24V						
Test results:	Pass						

Remarks:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Measurement Data:


■ 9kHz~30MHz, 18-40GHz

The emission from 9 kHz to 30MHz, 18-25GHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.

30MHz~ 1GHz

Pre-scan all test modes, found worst case at 802.11a 5180MHz, and so only show the test result of it

Horizontal:

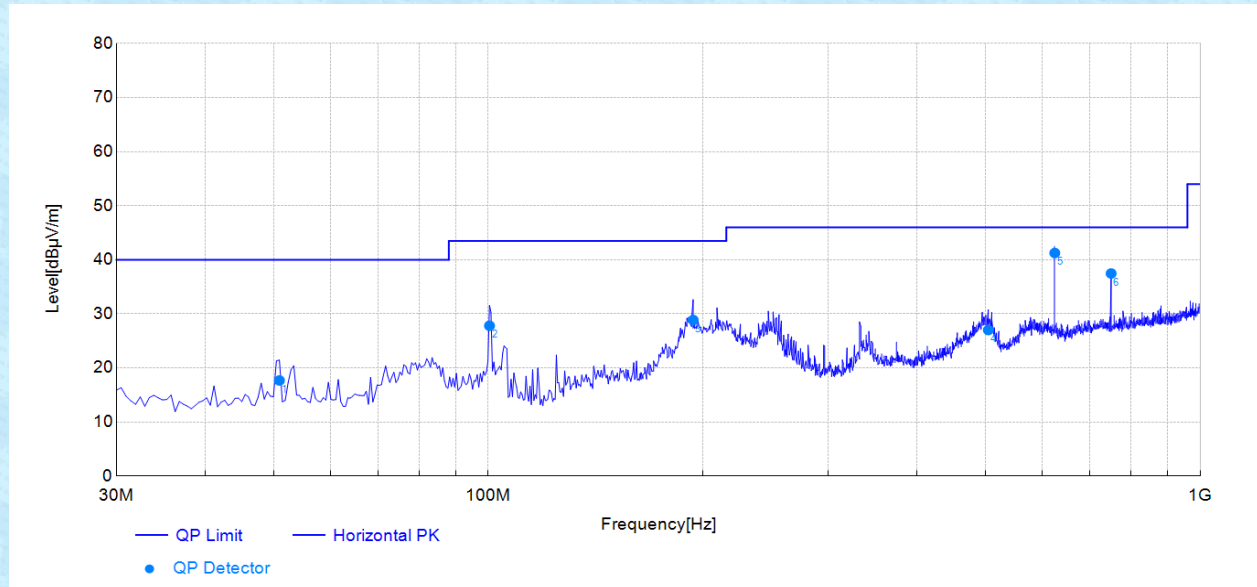

Final Data List										
NO.	Frequency [MHz]	Factor [dB/m]	QP Reading [dBμV]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Pol	Verdict
1	50.87	14.32	3.37	17.69	40.00	22.31	200	246	Horizontal	PASS
2	100.36	12.27	15.54	27.81	43.50	15.69	200	189	Horizontal	PASS
3	194.01	14.58	14.29	28.87	43.50	14.63	200	174	Horizontal	PASS
4	504.08	21.29	5.72	27.01	46.00	18.99	100	27	Horizontal	PASS
5	624.99	23.88	17.38	41.26	46.00	4.74	100	251	Horizontal	PASS
6	749.99	25.57	11.91	37.48	46.00	8.52	200	294	Horizontal	PASS


Note:

(1) Level=Reading + Factor

(2) Margin=Limit-Level

(3) The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 40GHz), therefore no data appear in the report.

Vertical:

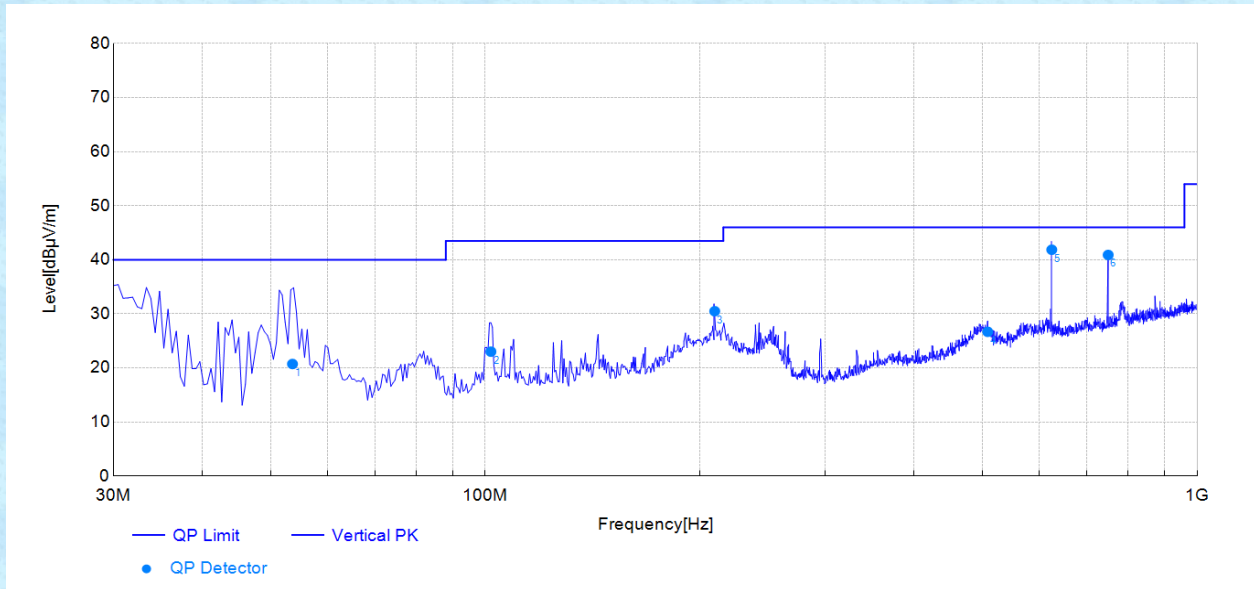

Final Data List										
NO.	Frequency [MHz]	Factor [dB/m]	QP Reading [dBμV]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Pol	Verdict
1	53.58	13.12	7.61	20.73	40.00	19.27	100	190	Vertical	PASS
2	101.82	12.43	10.59	23.02	43.50	20.48	100	292	Vertical	PASS
3	210.03	15.31	15.18	30.49	43.50	13.01	100	335	Vertical	PASS
4	507.96	22.43	4.26	26.69	46.00	19.31	100	136	Vertical	PASS
5	625.02	23.86	18.01	41.87	46.00	4.13	100	268	Vertical	PASS
6	750.10	25.87	15.04	40.91	46.00	5.09	100	15	Vertical	PASS

Note:

(1) Level=Reading + Factor


(2) Margin=Limit-Level

(3) The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 40GHz), therefore no data appear in the report.

Above 1GHz:

■ Unwanted Emissions in non-restricted Frequency Bands


Test Mode:	802.11a-CDD	Test Date:	2026-06-03
Test Channel:	5180MHz	Test Engineer:	Jawb Cai

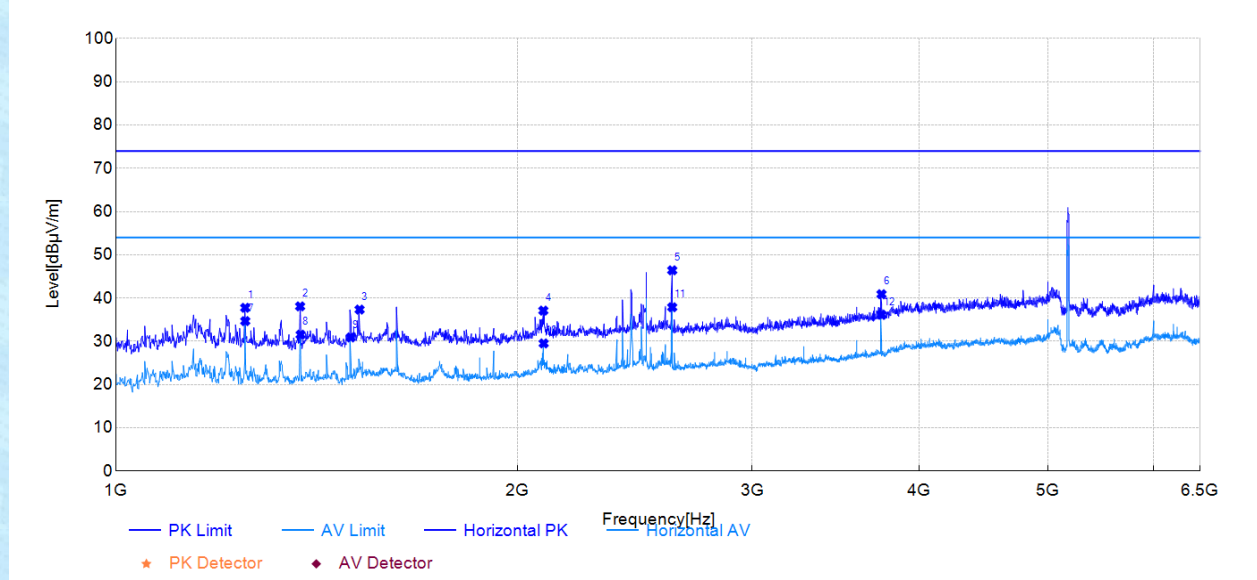

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	60.92	37.75	-23.17	74.00	36.25	150	152	PK	Horizontal	PASS
2	1374.00	60.40	38.08	-22.32	74.00	35.92	150	148	PK	Horizontal	PASS
3	1522.50	58.84	37.34	-21.50	74.00	36.66	150	25	PK	Horizontal	PASS
4	2091.20	54.68	37.10	-17.58	74.00	36.90	150	14	PK	Horizontal	PASS
5	2612.60	62.11	46.42	-15.69	74.00	27.58	150	296	PK	Horizontal	PASS
6	3750.00	51.56	40.89	-10.67	74.00	33.11	150	168	PK	Horizontal	PASS
7	1249.70	57.84	34.67	-23.17	54.00	19.33	150	158	AV	Horizontal	PASS
8	1375.10	53.84	31.53	-22.31	54.00	22.47	150	142	AV	Horizontal	PASS
9	1499.40	52.55	30.90	-21.65	54.00	23.10	150	111	AV	Horizontal	PASS
10	2092.30	47.09	29.51	-17.58	54.00	24.49	150	14	AV	Horizontal	PASS
11	2612.60	53.57	37.88	-15.69	54.00	16.12	150	296	AV	Horizontal	PASS
12	3750.00	46.81	36.14	-10.67	54.00	17.86	150	178	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

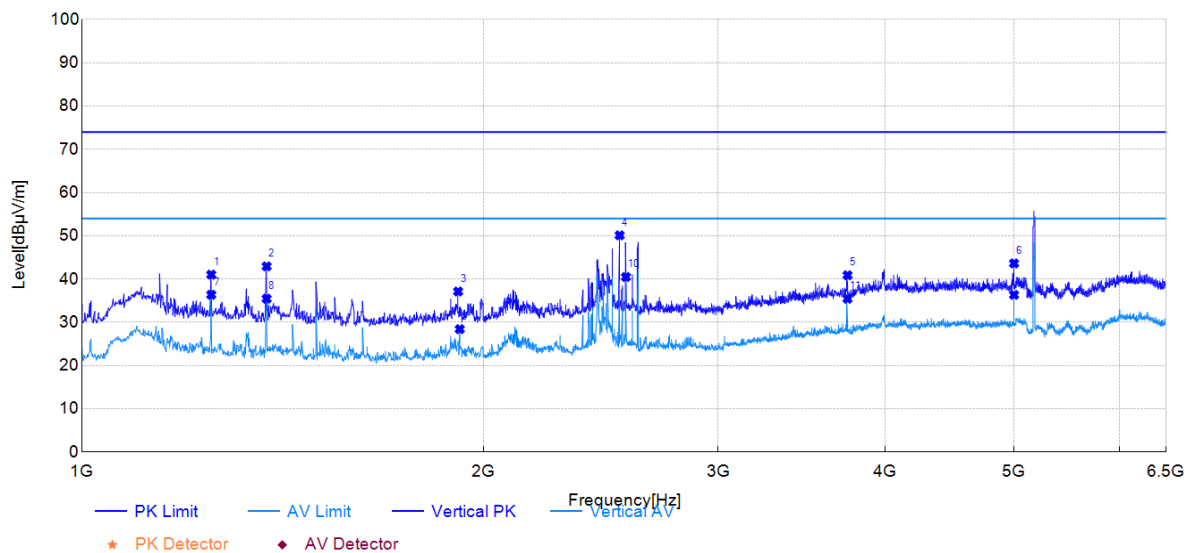


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	63.35	41.03	-22.32	74.00	32.97	150	162	PK	Vertical	PASS
2	1375.10	64.43	42.94	-21.49	74.00	31.06	150	152	PK	Vertical	PASS
3	1914.10	55.81	37.13	-18.68	74.00	36.87	150	90	PK	Vertical	PASS
4	2530.10	65.99	50.11	-15.88	74.00	23.89	150	152	PK	Vertical	PASS
5	3750.00	50.90	40.88	-10.02	74.00	33.12	150	239	PK	Vertical	PASS
6	4999.60	50.35	43.63	-6.72	74.00	30.37	150	193	PK	Vertical	PASS
7	1249.70	58.69	36.37	-22.32	54.00	17.63	150	162	AV	Vertical	PASS
8	1375.10	56.95	35.46	-21.49	54.00	18.54	150	152	AV	Vertical	PASS
9	1919.60	47.06	28.42	-18.64	54.00	25.58	150	136	AV	Vertical	PASS
10	2557.60	56.26	40.48	-15.78	54.00	13.52	150	351	AV	Vertical	PASS
11	3750.00	45.47	35.45	-10.02	54.00	18.55	150	55	AV	Vertical	PASS
12	4999.60	43.06	36.34	-6.72	54.00	17.66	150	213	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11a-CDD	Test Date:	2026-06-03
Test Channel:	5220MHz	Test Engineer:	Jawb Cai

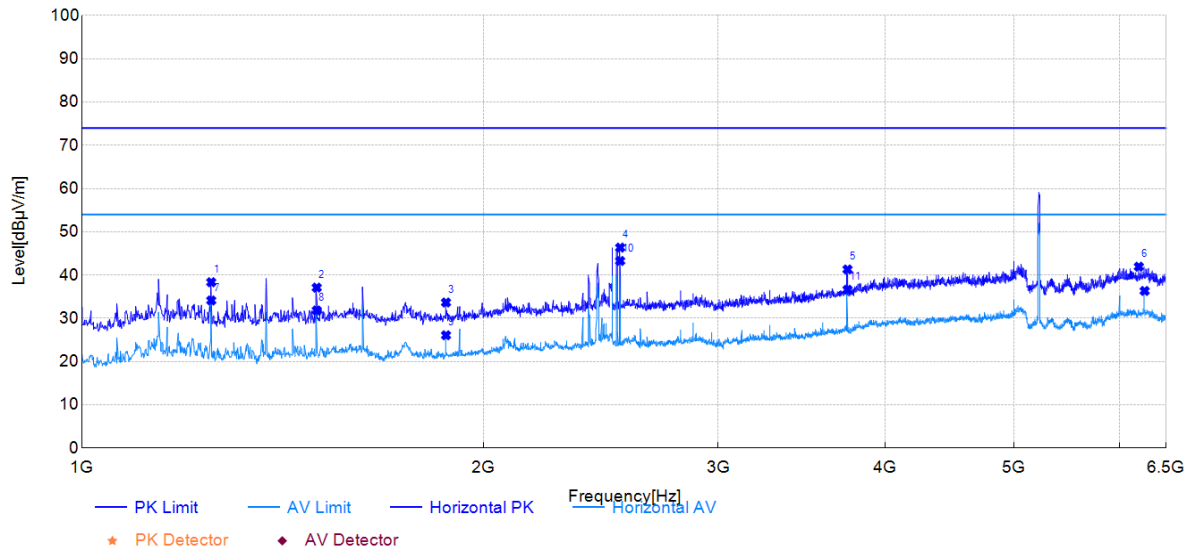

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	61.51	38.34	-23.17	74.00	35.66	150	157	PK	Horizontal	PASS
2	1499.40	58.75	37.10	-21.65	74.00	36.90	150	112	PK	Horizontal	PASS
3	1874.50	52.64	33.66	-18.98	74.00	40.34	150	127	PK	Horizontal	PASS
4	2532.30	62.34	46.35	-15.99	74.00	27.65	150	60	PK	Horizontal	PASS
5	3750.00	51.97	41.30	-10.67	74.00	32.70	150	178	PK	Horizontal	PASS
6	6201.90	46.31	41.94	-4.37	74.00	32.06	150	275	PK	Horizontal	PASS
7	1249.70	57.30	34.13	-23.17	54.00	19.87	150	157	AV	Horizontal	PASS
8	1499.40	53.46	31.81	-21.65	54.00	22.19	150	112	AV	Horizontal	PASS
9	1874.50	45.06	26.08	-18.98	54.00	27.92	150	147	AV	Horizontal	PASS
10	2532.30	59.26	43.27	-15.99	54.00	10.73	150	60	AV	Horizontal	PASS
11	3750.00	47.28	36.61	-10.67	54.00	17.39	150	178	AV	Horizontal	PASS
12	6264.60	40.50	36.33	-4.17	54.00	17.67	150	275	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

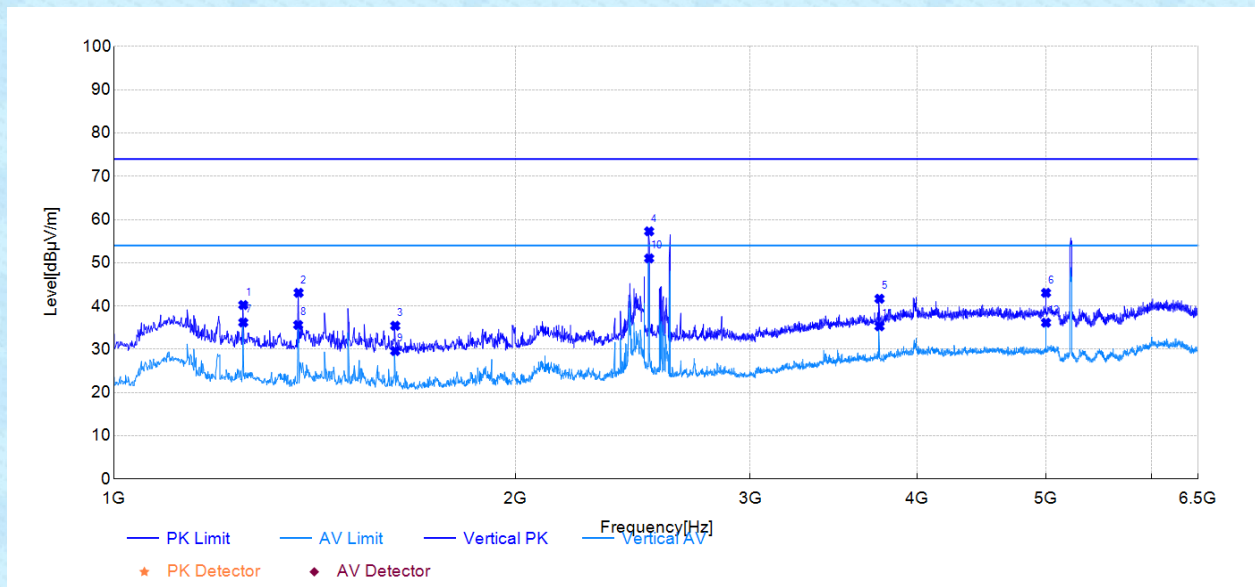


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	62.56	40.24	-22.32	74.00	33.76	150	156	PK	Vertical	PASS
2	1375.10	64.55	43.06	-21.49	74.00	30.94	150	156	PK	Vertical	PASS
3	1624.80	55.64	35.44	-20.20	74.00	38.56	150	278	PK	Vertical	PASS
4	2519.10	73.21	57.28	-15.93	74.00	16.72	150	223	PK	Vertical	PASS
5	3750.00	51.71	41.69	-10.02	74.00	32.31	150	59	PK	Vertical	PASS
6	4999.60	49.77	43.05	-6.72	74.00	30.95	150	197	PK	Vertical	PASS
7	1249.70	58.52	36.20	-22.32	54.00	17.80	150	166	AV	Vertical	PASS
8	1374.00	57.12	35.63	-21.49	54.00	18.37	150	156	AV	Vertical	PASS
9	1624.80	49.80	29.60	-20.20	54.00	24.40	150	284	AV	Vertical	PASS
10	2519.10	66.95	51.02	-15.93	54.00	2.98	150	223	AV	Vertical	PASS
11	3750.00	45.34	35.32	-10.02	54.00	18.68	150	59	AV	Vertical	PASS
12	4999.60	42.88	36.16	-6.72	54.00	17.84	150	197	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11a-CDD	Test Date:	2026-06-03
Test Channel:	5240MHz	Test Engineer:	Jawb Cai

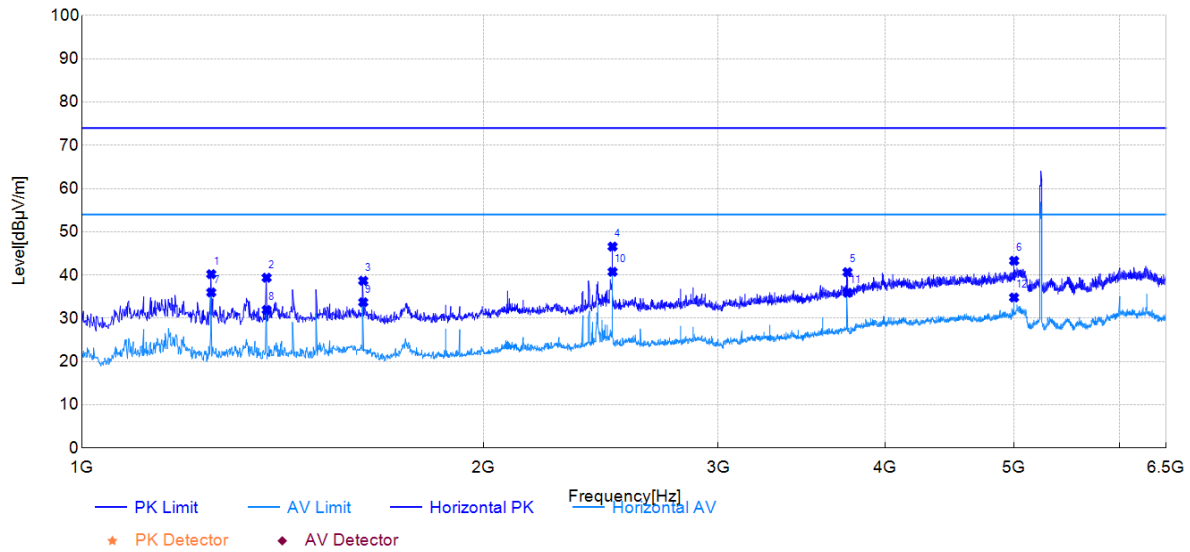

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	63.37	40.20	-23.17	74.00	33.80	150	153	PK	Horizontal	PASS
2	1375.10	61.69	39.38	-22.31	74.00	34.62	150	142	PK	Horizontal	PASS
3	1624.80	59.46	38.68	-20.78	74.00	35.32	150	167	PK	Horizontal	PASS
4	2499.30	62.68	46.58	-16.10	74.00	27.42	150	111	PK	Horizontal	PASS
5	3750.00	51.33	40.66	-10.67	74.00	33.34	150	178	PK	Horizontal	PASS
6	5000.70	49.42	43.30	-6.12	74.00	30.70	150	270	PK	Horizontal	PASS
7	1249.70	59.15	35.98	-23.17	54.00	18.02	150	153	AV	Horizontal	PASS
8	1375.10	54.25	31.94	-22.31	54.00	22.06	150	142	AV	Horizontal	PASS
9	1624.80	54.49	33.71	-20.78	54.00	20.29	150	173	AV	Horizontal	PASS
10	2499.30	56.85	40.75	-16.10	54.00	13.25	150	111	AV	Horizontal	PASS
11	3750.00	46.58	35.91	-10.67	54.00	18.09	150	178	AV	Horizontal	PASS
12	4999.60	40.93	34.81	-6.12	54.00	19.19	150	255	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

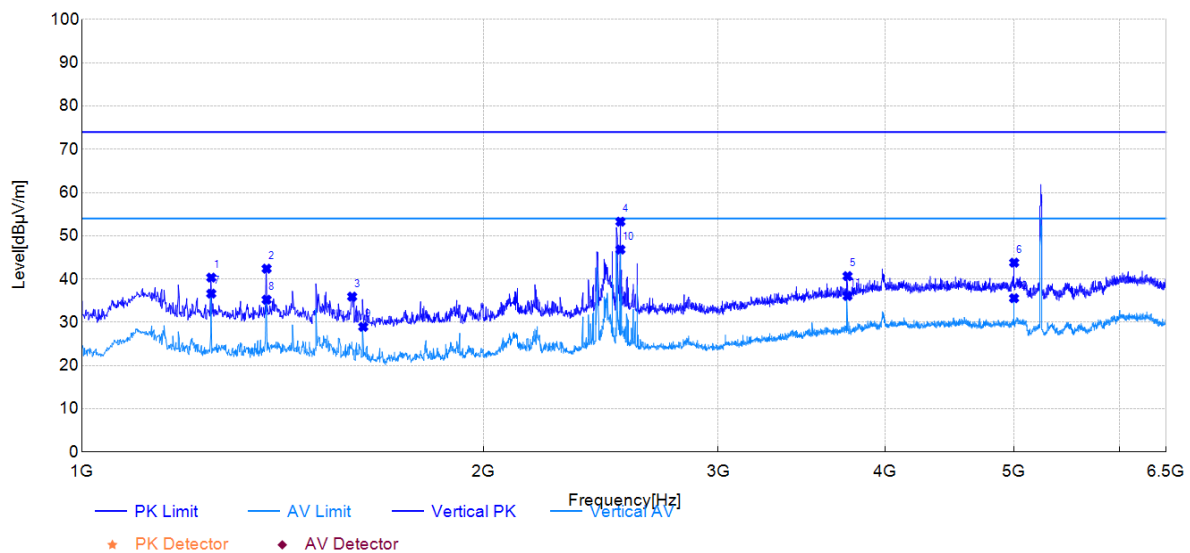


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	62.66	40.34	-22.32	74.00	33.66	150	156	PK	Vertical	PASS
2	1375.10	63.89	42.40	-21.49	74.00	31.60	150	146	PK	Vertical	PASS
3	1594.00	56.32	35.94	-20.38	74.00	38.06	150	54	PK	Vertical	PASS
4	2533.40	69.14	53.26	-15.88	74.00	20.74	150	238	PK	Vertical	PASS
5	3750.00	50.70	40.68	-10.02	74.00	33.32	150	233	PK	Vertical	PASS
6	5000.70	50.51	43.79	-6.72	74.00	30.21	150	187	PK	Vertical	PASS
7	1249.70	58.95	36.63	-22.32	54.00	17.37	150	156	AV	Vertical	PASS
8	1375.10	56.71	35.22	-21.49	54.00	18.78	150	152	AV	Vertical	PASS
9	1624.80	49.15	28.95	-20.20	54.00	25.05	150	284	AV	Vertical	PASS
10	2533.40	62.70	46.82	-15.88	54.00	7.18	150	238	AV	Vertical	PASS
11	3750.00	46.11	36.09	-10.02	54.00	17.91	150	233	AV	Vertical	PASS
12	4999.60	42.29	35.57	-6.72	54.00	18.43	150	207	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11a-CDD	Test Date:	2026-06-03
Test Channel:	5260MHz	Test Engineer:	Jawb Cai

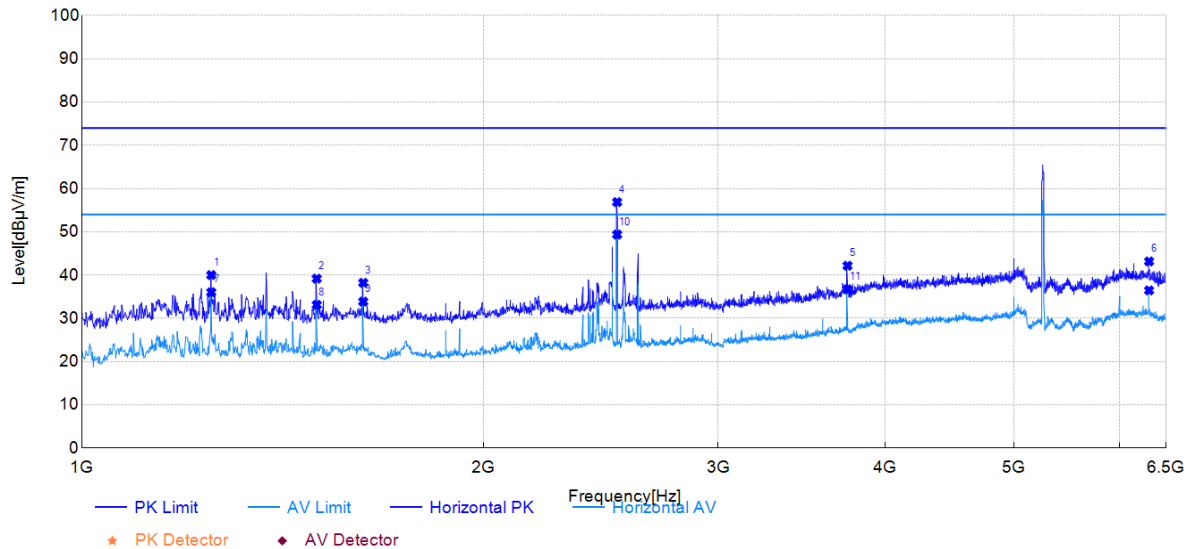

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	63.17	40.00	-23.17	74.00	34.00	150	153	PK	Horizontal	PASS
2	1499.40	60.83	39.18	-21.65	74.00	34.82	150	112	PK	Horizontal	PASS
3	1624.80	58.99	38.21	-20.78	74.00	35.79	150	173	PK	Horizontal	PASS
4	2519.10	72.90	56.87	-16.03	74.00	17.13	150	357	PK	Horizontal	PASS
5	3750.00	52.83	42.16	-10.67	74.00	31.84	150	173	PK	Horizontal	PASS
6	6313.00	47.33	43.15	-4.18	74.00	30.85	150	270	PK	Horizontal	PASS
7	1249.70	59.19	36.02	-23.17	54.00	17.98	150	153	AV	Horizontal	PASS
8	1499.40	54.76	33.11	-21.65	54.00	20.89	150	112	AV	Horizontal	PASS
9	1624.80	54.64	33.86	-20.78	54.00	20.14	150	280	AV	Horizontal	PASS
10	2519.10	65.40	49.37	-16.03	54.00	4.63	150	357	AV	Horizontal	PASS
11	3750.00	47.39	36.72	-10.67	54.00	17.28	150	183	AV	Horizontal	PASS
12	6313.00	40.64	36.46	-4.18	54.00	17.54	150	270	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

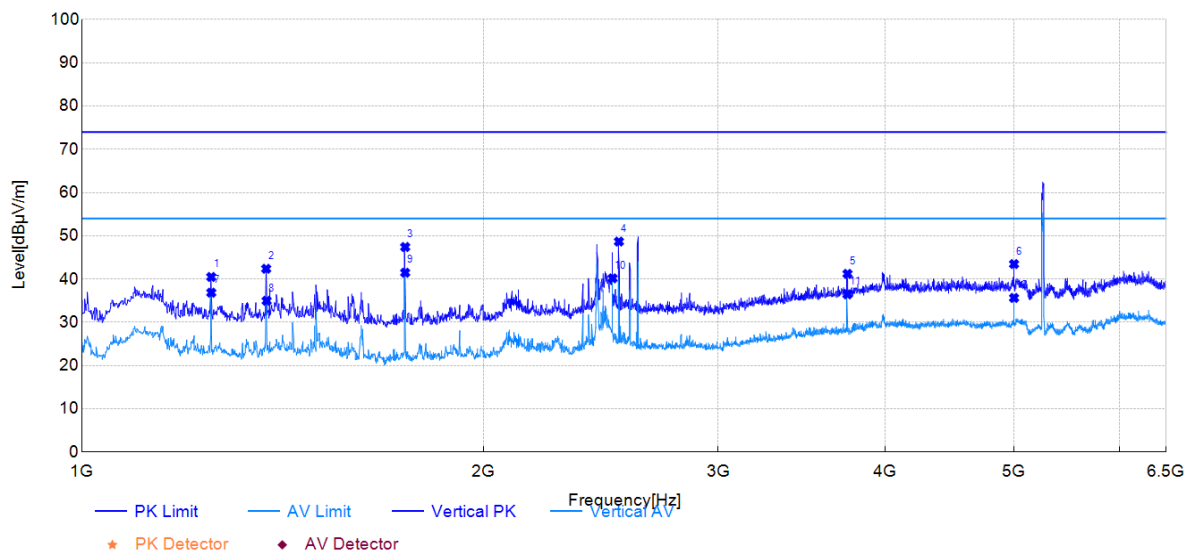


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	62.81	40.49	-22.32	74.00	33.51	150	155	PK	Vertical	PASS
2	1374.00	63.87	42.38	-21.49	74.00	31.62	150	151	PK	Vertical	PASS
3	1746.90	66.83	47.41	-19.42	74.00	26.59	150	293	PK	Vertical	PASS
4	2526.80	64.57	48.67	-15.90	74.00	25.33	150	211	PK	Vertical	PASS
5	3750.00	51.23	41.21	-10.02	74.00	32.79	150	223	PK	Vertical	PASS
6	4999.60	50.19	43.47	-6.72	74.00	30.53	150	197	PK	Vertical	PASS
7	1249.70	59.17	36.85	-22.32	54.00	17.15	150	151	AV	Vertical	PASS
8	1375.10	56.46	34.97	-21.49	54.00	19.03	150	155	AV	Vertical	PASS
9	1746.90	60.89	41.47	-19.42	54.00	12.53	150	293	AV	Vertical	PASS
10	2499.30	56.17	40.17	-16.00	54.00	13.83	150	124	AV	Vertical	PASS
11	3750.00	46.48	36.46	-10.02	54.00	17.54	150	58	AV	Vertical	PASS
12	4999.60	42.36	35.64	-6.72	54.00	18.36	150	197	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11a-CDD	Test Date:	2026-06-03
Test Channel:	5300MHz	Test Engineer:	Jawb Cai

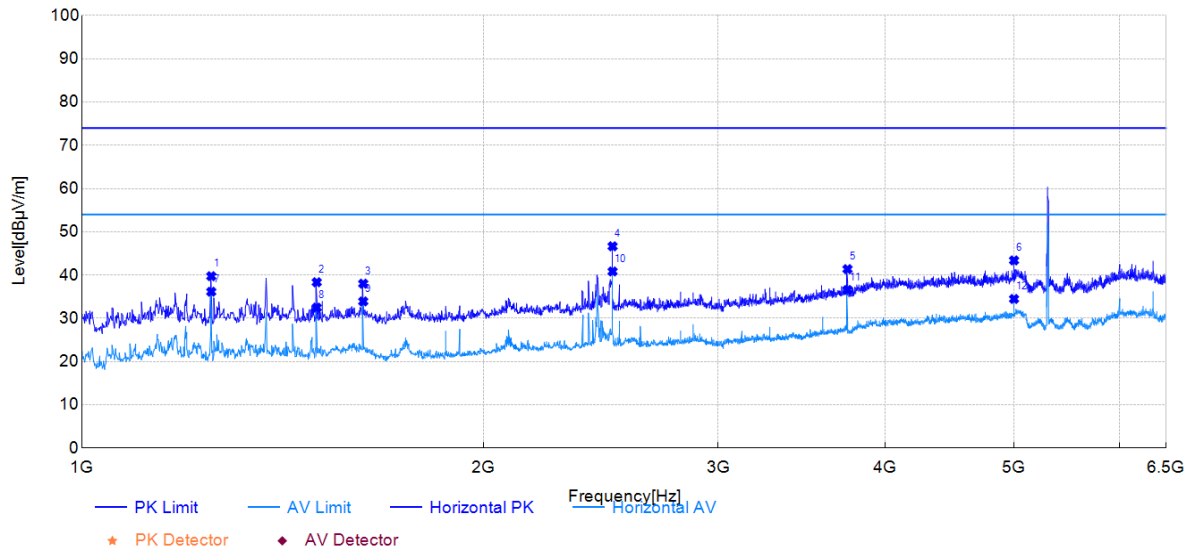

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	62.91	39.74	-23.17	74.00	34.26	150	157	PK	Horizontal	PASS
2	1499.40	59.99	38.34	-21.65	74.00	35.66	150	112	PK	Horizontal	PASS
3	1624.80	58.79	38.01	-20.78	74.00	35.99	150	275	PK	Horizontal	PASS
4	2499.30	62.75	46.65	-16.10	74.00	27.35	150	112	PK	Horizontal	PASS
5	3750.00	52.04	41.37	-10.67	74.00	32.63	150	173	PK	Horizontal	PASS
6	4999.60	49.51	43.39	-6.12	74.00	30.61	150	0	PK	Horizontal	PASS
7	1249.70	59.32	36.15	-23.17	54.00	17.85	150	157	AV	Horizontal	PASS
8	1499.40	54.12	32.47	-21.65	54.00	21.53	150	112	AV	Horizontal	PASS
9	1624.80	54.69	33.91	-20.78	54.00	20.09	150	281	AV	Horizontal	PASS
10	2499.30	56.93	40.83	-16.10	54.00	13.17	150	112	AV	Horizontal	PASS
11	3750.00	47.23	36.56	-10.67	54.00	17.44	150	178	AV	Horizontal	PASS
12	4999.60	40.60	34.48	-6.12	54.00	19.52	150	342	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

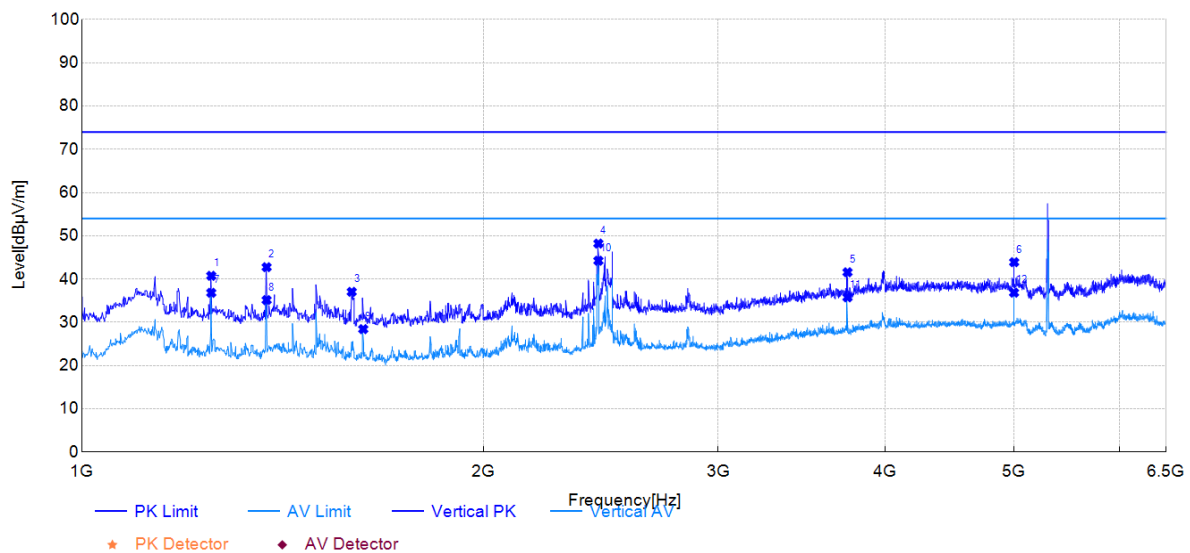


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	63.07	40.75	-22.32	74.00	33.25	150	152	PK	Vertical	PASS
2	1375.10	64.24	42.75	-21.49	74.00	31.25	150	152	PK	Vertical	PASS
3	1592.90	57.43	37.05	-20.38	74.00	36.95	150	55	PK	Vertical	PASS
4	2438.80	64.48	48.21	-16.27	74.00	25.79	150	122	PK	Vertical	PASS
5	3750.00	51.59	41.57	-10.02	74.00	32.43	150	250	PK	Vertical	PASS
6	5000.70	50.62	43.90	-6.72	74.00	30.10	150	193	PK	Vertical	PASS
7	1249.70	59.14	36.82	-22.32	54.00	17.18	150	158	AV	Vertical	PASS
8	1375.10	56.63	35.14	-21.49	54.00	18.86	150	152	AV	Vertical	PASS
9	1624.80	48.62	28.42	-20.20	54.00	25.58	150	92	AV	Vertical	PASS
10	2438.80	60.51	44.24	-16.27	54.00	9.76	150	122	AV	Vertical	PASS
11	3750.00	45.80	35.78	-10.02	54.00	18.22	150	234	AV	Vertical	PASS
12	4999.60	43.57	36.85	-6.72	54.00	17.15	150	197	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11a-CDD	Test Date:	2026-06-03
Test Channel:	5320MHz	Test Engineer:	Jawb Cai

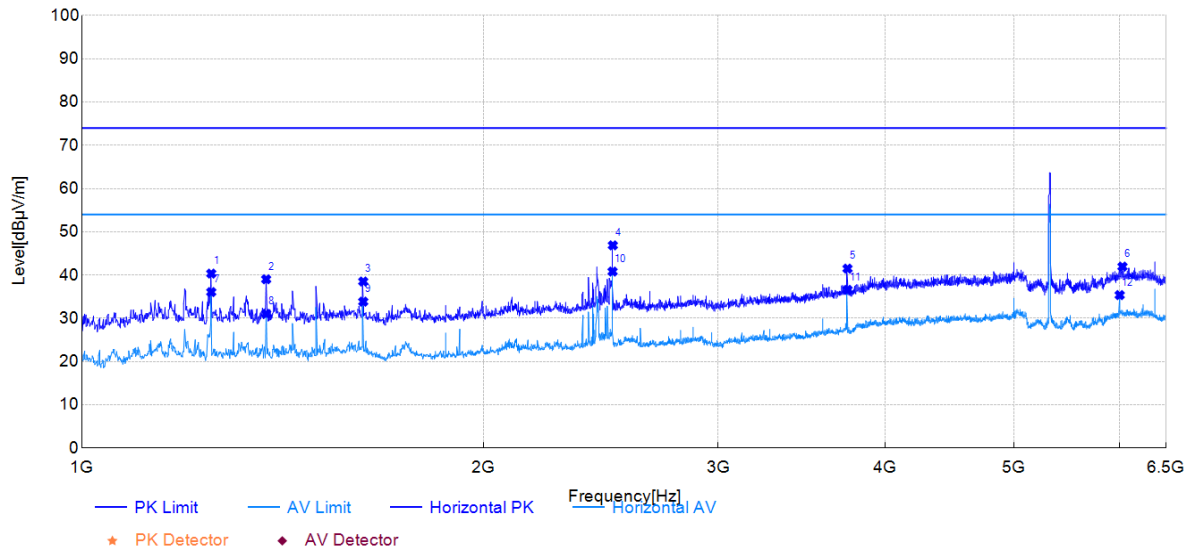

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	63.51	40.34	-23.17	74.00	33.66	150	158	PK	Horizontal	PASS
2	1374.00	61.35	39.03	-22.32	74.00	34.97	150	142	PK	Horizontal	PASS
3	1624.80	59.29	38.51	-20.78	74.00	35.49	150	284	PK	Horizontal	PASS
4	2500.40	62.97	46.87	-16.10	74.00	27.13	150	105	PK	Horizontal	PASS
5	3750.00	52.16	41.49	-10.67	74.00	32.51	150	178	PK	Horizontal	PASS
6	6029.20	46.87	41.96	-4.91	74.00	32.04	150	280	PK	Horizontal	PASS
7	1249.70	59.24	36.07	-23.17	54.00	17.93	150	158	AV	Horizontal	PASS
8	1374.00	53.35	31.03	-22.32	54.00	22.97	150	146	AV	Horizontal	PASS
9	1624.80	54.63	33.85	-20.78	54.00	20.15	150	284	AV	Horizontal	PASS
10	2499.30	56.91	40.81	-16.10	54.00	13.19	150	111	AV	Horizontal	PASS
11	3750.00	47.24	36.57	-10.67	54.00	17.43	150	183	AV	Horizontal	PASS
12	6000.60	40.48	35.37	-5.11	54.00	18.63	150	331	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

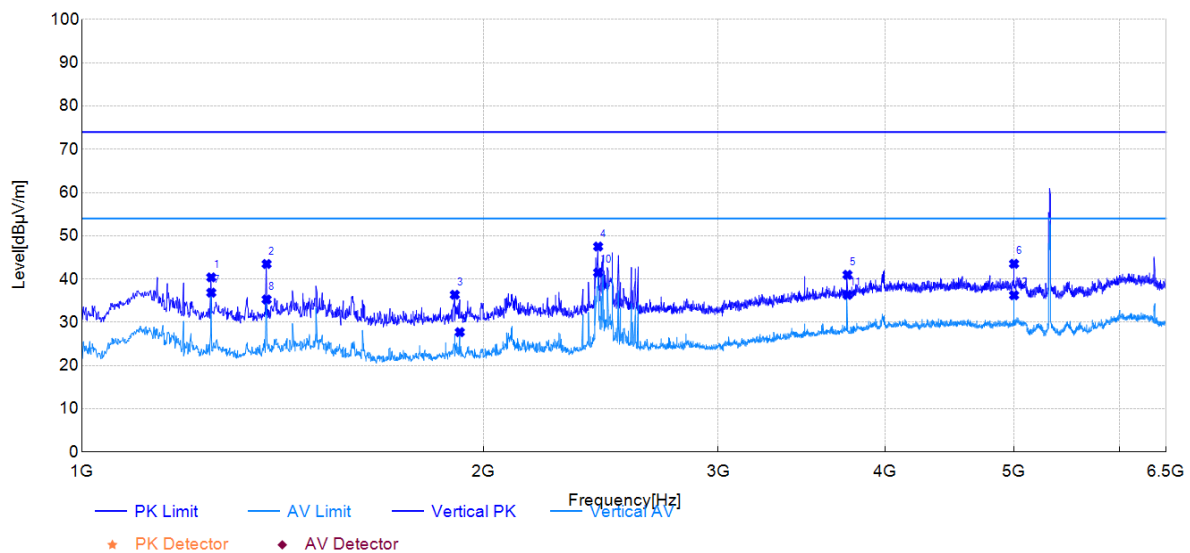


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	62.71	40.39	-	74.00	33.61	150	152	PK	Vertical	PASS
2	1375.10	64.97	43.48	-	74.00	30.52	150	152	PK	Vertical	PASS
3	1903.10	55.13	36.37	-	74.00	37.63	150	131	PK	Vertical	PASS
4	2437.70	63.79	47.52	-	74.00	26.48	150	64	PK	Vertical	PASS
5	3750.00	51.00	40.98	-	74.00	33.02	150	233	PK	Vertical	PASS
6	4999.60	50.25	43.53	-6.72	74.00	30.47	150	274	PK	Vertical	PASS
7	1249.70	59.17	36.85	-	54.00	17.15	150	152	AV	Vertical	PASS
8	1375.10	56.77	35.28	-	54.00	18.72	150	152	AV	Vertical	PASS
9	1919.60	46.36	27.72	-	54.00	26.28	150	141	AV	Vertical	PASS
10	2437.70	57.77	41.50	-	54.00	12.50	150	105	AV	Vertical	PASS
11	3750.00	46.35	36.33	-	54.00	17.67	150	233	AV	Vertical	PASS
12	4999.60	42.98	36.26	-6.72	54.00	17.74	150	198	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11a-CDD	Test Date:	2026-06-03
Test Channel:	5500MHz	Test Engineer:	Jawb Cai

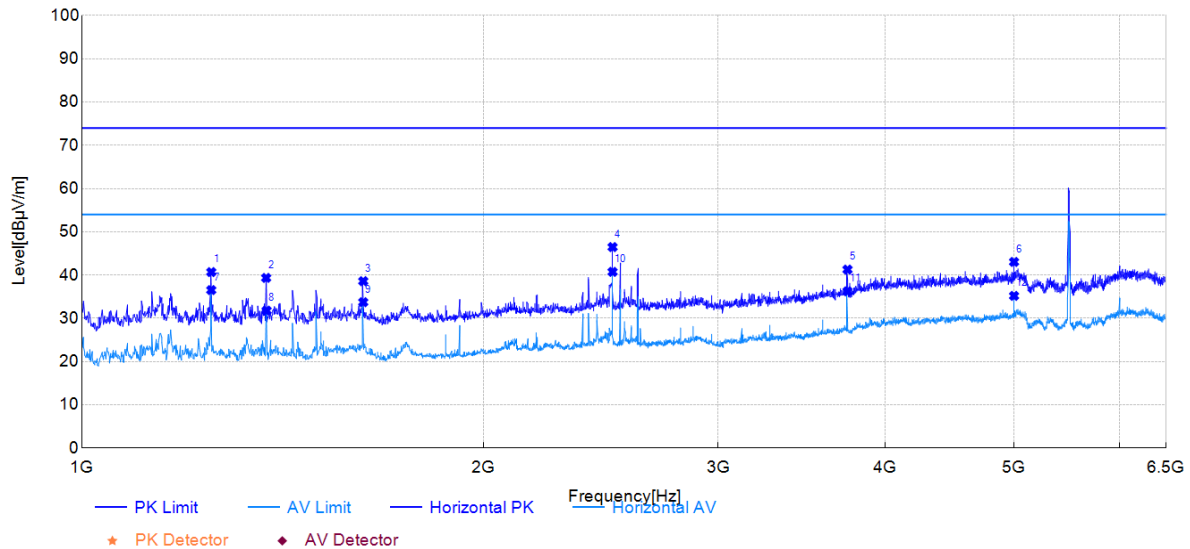

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	63.86	40.69	-23.17	74.00	33.31	150	153	PK	Horizontal	PASS
2	1374.00	61.66	39.34	-22.32	74.00	34.66	150	143	PK	Horizontal	PASS
3	1624.80	59.37	38.59	-20.78	74.00	35.41	150	282	PK	Horizontal	PASS
4	2499.30	62.57	46.47	-16.10	74.00	27.53	150	113	PK	Horizontal	PASS
5	3750.00	51.94	41.27	-10.67	74.00	32.73	150	178	PK	Horizontal	PASS
6	4999.60	49.16	43.04	-6.12	74.00	30.96	150	218	PK	Horizontal	PASS
7	1249.70	59.70	36.53	-23.17	54.00	17.47	150	153	AV	Horizontal	PASS
8	1375.10	54.08	31.77	-22.31	54.00	22.23	150	147	AV	Horizontal	PASS
9	1624.80	54.51	33.73	-20.78	54.00	20.27	150	282	AV	Horizontal	PASS
10	2499.30	56.84	40.74	-16.10	54.00	13.26	150	113	AV	Horizontal	PASS
11	3750.00	46.91	36.24	-10.67	54.00	17.76	150	178	AV	Horizontal	PASS
12	4999.60	41.31	35.19	-6.12	54.00	18.81	150	212	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

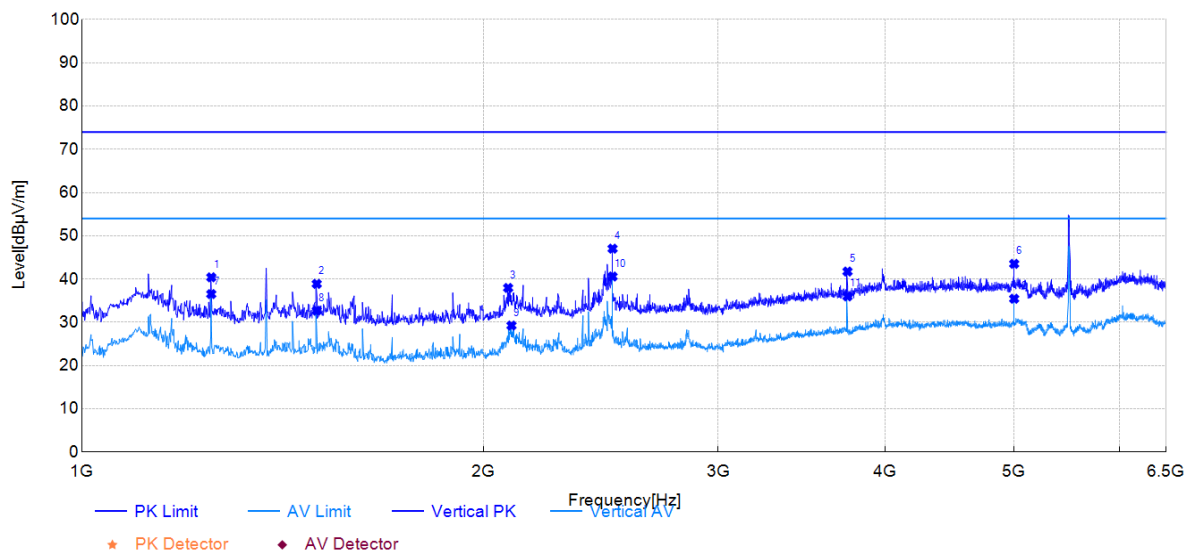


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	62.73	40.41	-22.32	74.00	33.59	150	163	PK	Vertical	PASS
2	1499.40	59.74	38.89	-20.85	74.00	35.11	150	104	PK	Vertical	PASS
3	2086.80	55.62	37.95	-17.67	74.00	36.05	150	129	PK	Vertical	PASS
4	2499.30	63.03	47.03	-16.00	74.00	26.97	150	129	PK	Vertical	PASS
5	3750.00	51.76	41.74	-10.02	74.00	32.26	150	59	PK	Vertical	PASS
6	5000.70	50.24	43.52	-6.72	74.00	30.48	150	184	PK	Vertical	PASS
7	1249.70	58.85	36.53	-22.32	54.00	17.47	150	163	AV	Vertical	PASS
8	1499.40	53.55	32.70	-20.85	54.00	21.30	150	143	AV	Vertical	PASS
9	2098.90	46.86	29.25	-17.61	54.00	24.75	150	359	AV	Vertical	PASS
10	2499.30	56.59	40.59	-16.00	54.00	13.41	150	129	AV	Vertical	PASS
11	3750.00	46.01	35.99	-10.02	54.00	18.01	150	234	AV	Vertical	PASS
12	5000.70	42.17	35.45	-6.72	54.00	18.55	150	199	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11a-CDD	Test Date:	2026-06-03
Test Channel:	5580MHz	Test Engineer:	Jawb Cai

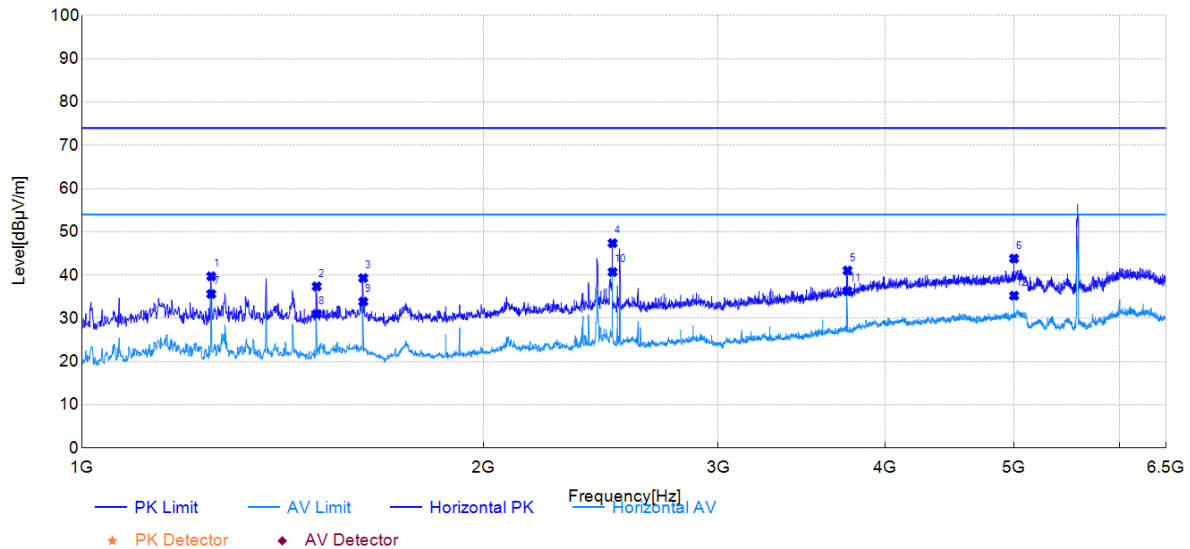

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	62.88	39.71	-23.17	74.00	34.29	150	163	PK	Horizontal	PASS
2	1499.40	59.03	37.38	-21.65	74.00	36.62	150	117	PK	Horizontal	PASS
3	1624.80	60.08	39.30	-20.78	74.00	34.70	150	280	PK	Horizontal	PASS
4	2499.30	63.47	47.37	-16.10	74.00	26.63	150	111	PK	Horizontal	PASS
5	3750.00	51.72	41.05	-10.67	74.00	32.95	150	178	PK	Horizontal	PASS
6	4999.60	49.94	43.82	-6.12	74.00	30.18	150	253	PK	Horizontal	PASS
7	1249.70	58.79	35.62	-23.17	54.00	18.38	150	163	AV	Horizontal	PASS
8	1499.40	52.63	30.98	-21.65	54.00	23.02	150	106	AV	Horizontal	PASS
9	1624.80	54.63	33.85	-20.78	54.00	20.15	150	280	AV	Horizontal	PASS
10	2499.30	56.80	40.70	-16.10	54.00	13.30	150	111	AV	Horizontal	PASS
11	3750.00	46.96	36.29	-10.67	54.00	17.71	150	183	AV	Horizontal	PASS
12	4999.60	41.35	35.23	-6.12	54.00	18.77	150	253	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

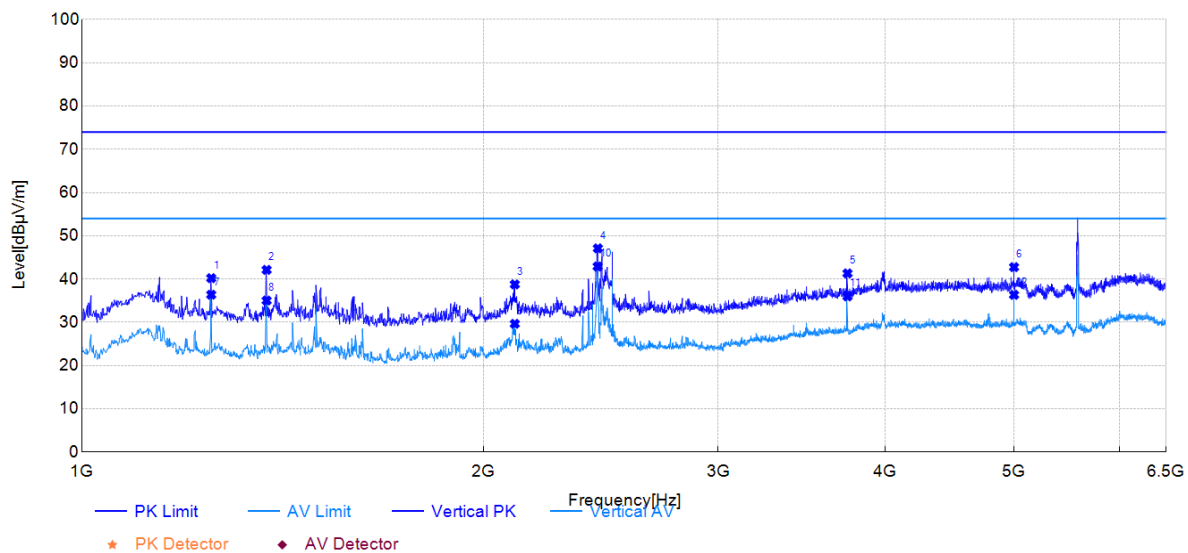


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	62.53	40.21	-22.32	74.00	33.79	150	145	PK	Vertical	PASS
2	1375.10	63.61	42.12	-21.49	74.00	31.88	150	84	PK	Vertical	PASS
3	2111.00	56.34	38.77	-17.57	74.00	35.23	150	125	PK	Vertical	PASS
4	2436.60	63.37	47.10	-16.27	74.00	26.90	150	100	PK	Vertical	PASS
5	3750.00	51.33	41.31	-10.02	74.00	32.69	150	232	PK	Vertical	PASS
6	4999.60	49.48	42.76	-6.72	74.00	31.24	150	196	PK	Vertical	PASS
7	1249.70	58.70	36.38	-22.32	54.00	17.62	150	160	AV	Vertical	PASS
8	1375.10	56.51	35.02	-21.49	54.00	18.98	150	155	AV	Vertical	PASS
9	2111.00	47.22	29.65	-17.57	54.00	24.35	150	125	AV	Vertical	PASS
10	2435.50	59.20	42.91	-16.29	54.00	11.09	150	110	AV	Vertical	PASS
11	3750.00	46.01	35.99	-10.02	54.00	18.01	150	232	AV	Vertical	PASS
12	4999.60	43.07	36.35	-6.72	54.00	17.65	150	196	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11a-CDD	Test Date:	2026-06-03
Test Channel:	5700MHz	Test Engineer:	Jawb Cai

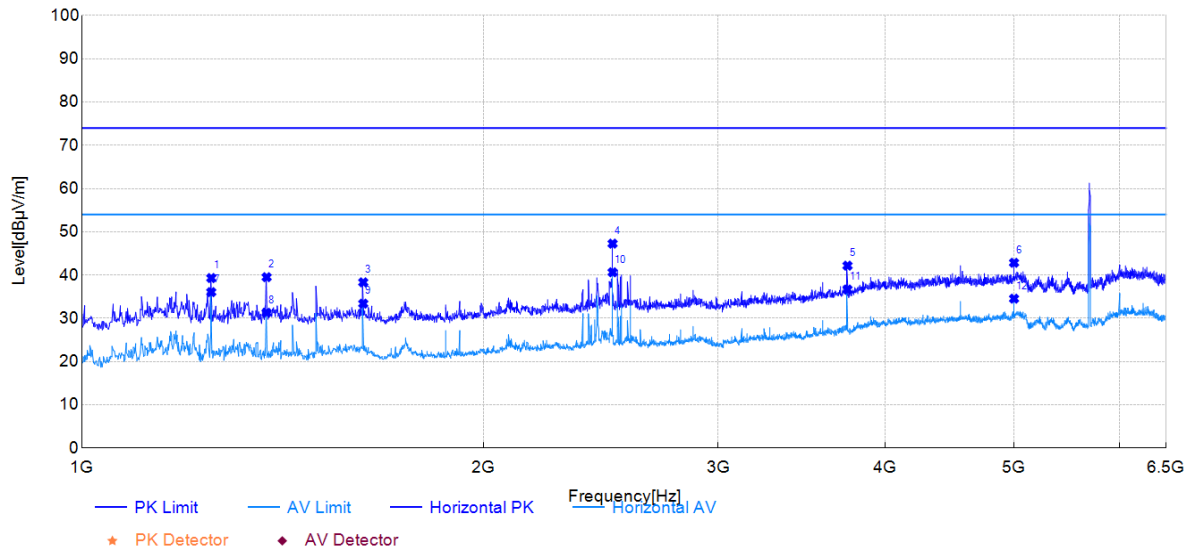

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	62.48	39.31	-23.17	74.00	34.69	150	153	PK	Horizontal	PASS
2	1375.10	61.82	39.51	-22.31	74.00	34.49	150	143	PK	Horizontal	PASS
3	1624.80	59.10	38.32	-20.78	74.00	35.68	150	280	PK	Horizontal	PASS
4	2499.30	63.37	47.27	-16.10	74.00	26.73	150	108	PK	Horizontal	PASS
5	3750.00	52.84	42.17	-10.67	74.00	31.83	150	178	PK	Horizontal	PASS
6	4999.60	48.96	42.84	-6.12	74.00	31.16	150	188	PK	Horizontal	PASS
7	1249.70	59.23	36.06	-23.17	54.00	17.94	150	157	AV	Horizontal	PASS
8	1375.10	53.60	31.29	-22.31	54.00	22.71	150	143	AV	Horizontal	PASS
9	1624.80	54.17	33.39	-20.78	54.00	20.61	150	285	AV	Horizontal	PASS
10	2499.30	56.74	40.64	-16.10	54.00	13.36	150	108	AV	Horizontal	PASS
11	3750.00	47.33	36.66	-10.67	54.00	17.34	150	178	AV	Horizontal	PASS
12	4999.60	40.66	34.54	-6.12	54.00	19.46	150	254	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

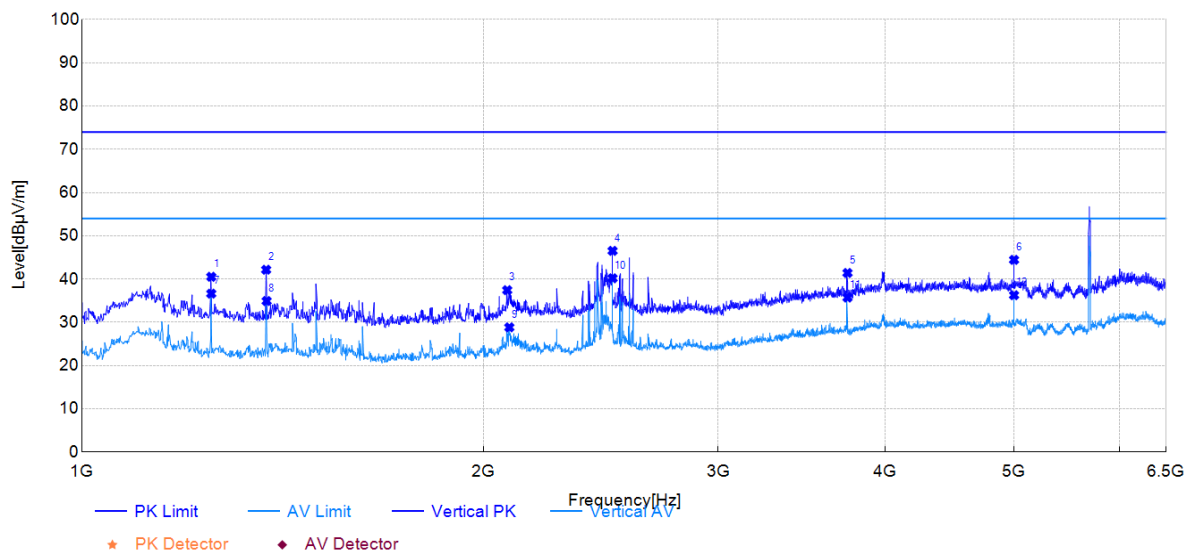


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	62.84	40.52	-22.32	74.00	33.48	150	150	PK	Vertical	PASS
2	1374.00	63.65	42.16	-21.49	74.00	31.84	150	156	PK	Vertical	PASS
3	2083.50	55.11	37.43	-17.68	74.00	36.57	150	80	PK	Vertical	PASS
4	2499.30	62.52	46.52	-16.00	74.00	27.48	150	124	PK	Vertical	PASS
5	3750.00	51.43	41.41	-10.02	74.00	32.59	150	233	PK	Vertical	PASS
6	4999.60	51.16	44.44	-6.72	74.00	29.56	150	201	PK	Vertical	PASS
7	1249.70	58.95	36.63	-22.32	54.00	17.37	150	150	AV	Vertical	PASS
8	1375.10	56.41	34.92	-21.49	54.00	19.08	150	146	AV	Vertical	PASS
9	2091.20	46.48	28.83	-17.65	54.00	25.17	150	104	AV	Vertical	PASS
10	2499.30	56.18	40.18	-16.00	54.00	13.82	150	124	AV	Vertical	PASS
11	3750.00	45.74	35.72	-10.02	54.00	18.28	150	233	AV	Vertical	PASS
12	4999.60	42.99	36.27	-6.72	54.00	17.73	150	201	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11a-CDD	Test Date:	2026-06-03
Test Channel:	5745MHz	Test Engineer:	Jawb Cai

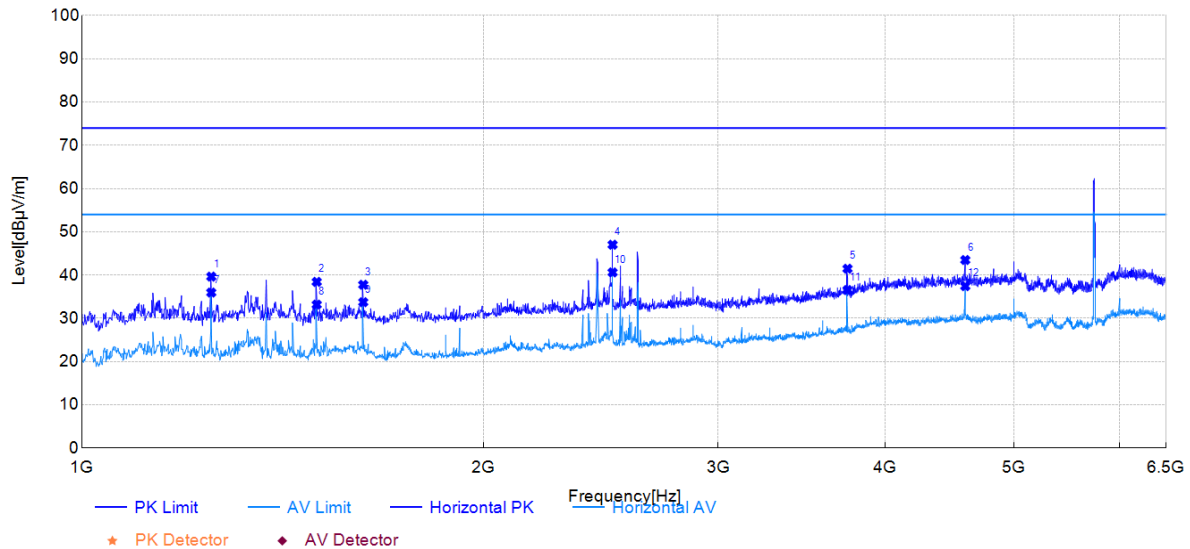

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	62.81	39.64	-23.17	74.00	34.36	150	161	PK	Horizontal	PASS
2	1499.40	60.08	38.43	-21.65	74.00	35.57	150	111	PK	Horizontal	PASS
3	1624.80	58.54	37.76	-20.78	74.00	36.24	150	235	PK	Horizontal	PASS
4	2499.30	63.11	47.01	-16.10	74.00	26.99	150	115	PK	Horizontal	PASS
5	3750.00	52.14	41.47	-10.67	74.00	32.53	150	171	PK	Horizontal	PASS
6	4595.90	50.66	43.48	-7.18	74.00	30.52	150	0	PK	Horizontal	PASS
7	1249.70	59.13	35.96	-23.17	54.00	18.04	150	156	AV	Horizontal	PASS
8	1499.40	54.81	33.16	-21.65	54.00	20.84	150	111	AV	Horizontal	PASS
9	1624.80	54.51	33.73	-20.78	54.00	20.27	150	280	AV	Horizontal	PASS
10	2499.30	56.71	40.61	-16.10	54.00	13.39	150	111	AV	Horizontal	PASS
11	3750.00	47.21	36.54	-10.67	54.00	17.46	150	181	AV	Horizontal	PASS
12	4595.90	44.62	37.44	-7.18	54.00	16.56	150	11	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

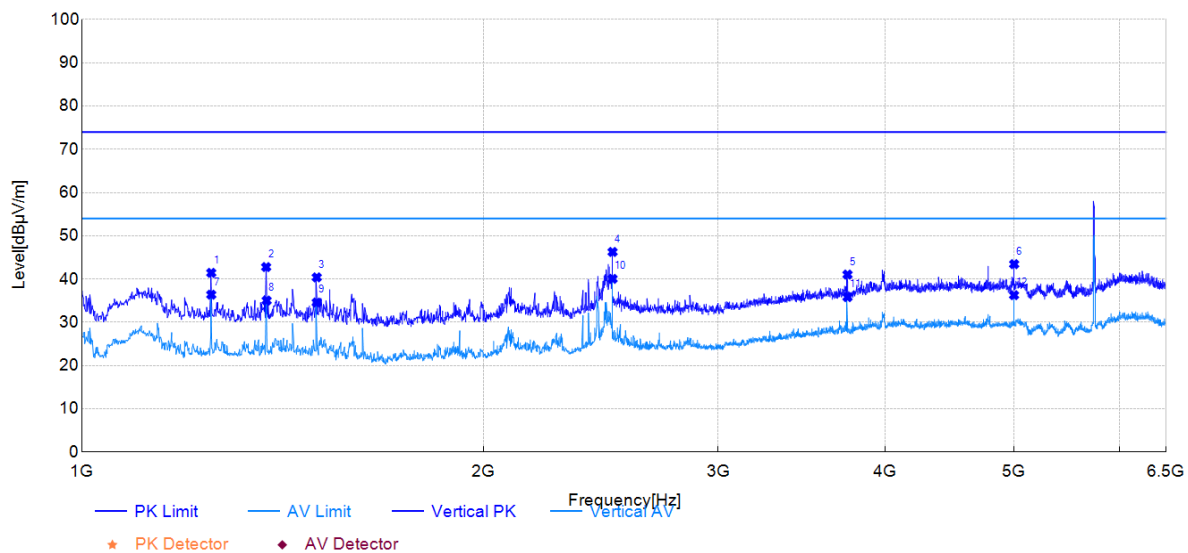


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	63.76	41.44	-22.32	74.00	32.56	150	153	PK	Vertical	PASS
2	1374.00	64.27	42.78	-21.49	74.00	31.22	150	153	PK	Vertical	PASS
3	1499.40	61.24	40.39	-20.85	74.00	33.61	150	108	PK	Vertical	PASS
4	2499.30	62.27	46.27	-16.00	74.00	27.73	150	128	PK	Vertical	PASS
5	3750.00	51.06	41.04	-10.02	74.00	32.96	150	233	PK	Vertical	PASS
6	5000.70	50.17	43.45	-6.72	74.00	30.55	150	193	PK	Vertical	PASS
7	1249.70	58.71	36.39	-22.32	54.00	17.61	150	153	AV	Vertical	PASS
8	1375.10	56.52	35.03	-21.49	54.00	18.97	150	84	AV	Vertical	PASS
9	1499.40	55.42	34.57	-20.85	54.00	19.43	150	108	AV	Vertical	PASS
10	2499.30	56.05	40.05	-16.00	54.00	13.95	150	128	AV	Vertical	PASS
11	3750.00	45.85	35.83	-10.02	54.00	18.17	150	228	AV	Vertical	PASS
12	4999.60	43.00	36.28	-6.72	54.00	17.72	150	189	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11a-CDD	Test Date:	2026-06-03
Test Channel:	5785MHz	Test Engineer:	Jawb Cai

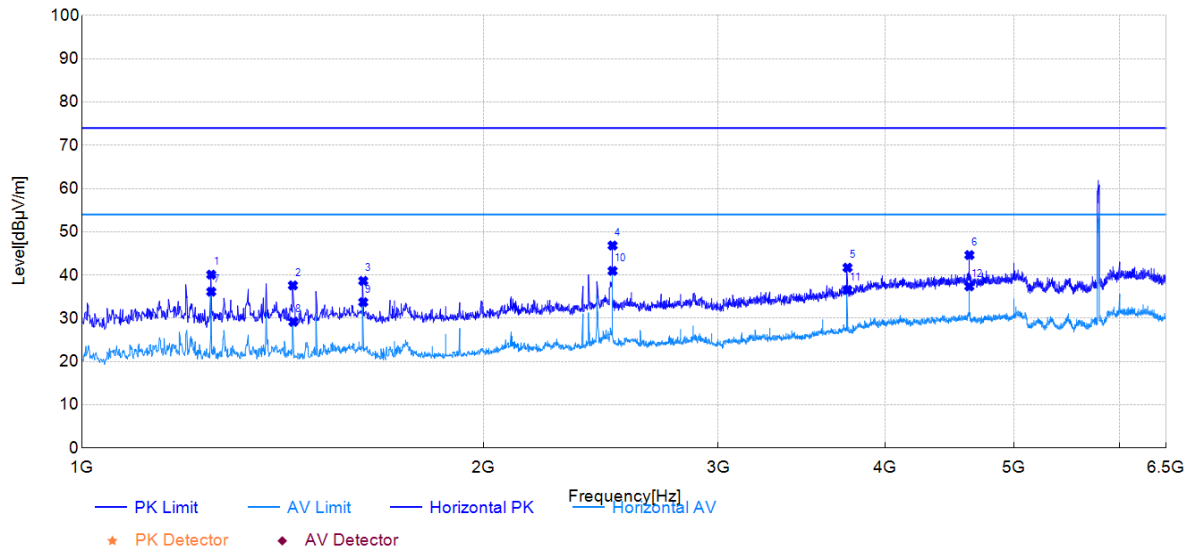

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	63.26	40.09	-23.17	74.00	33.91	150	157	PK	Horizontal	PASS
2	1438.90	59.56	37.61	-21.95	74.00	36.39	150	117	PK	Horizontal	PASS
3	1624.80	59.43	38.65	-20.78	74.00	35.35	150	229	PK	Horizontal	PASS
4	2499.30	62.93	46.83	-16.10	74.00	27.17	150	113	PK	Horizontal	PASS
5	3750.00	52.38	41.71	-10.67	74.00	32.29	150	178	PK	Horizontal	PASS
6	4628.90	51.79	44.62	-7.17	74.00	29.38	150	326	PK	Horizontal	PASS
7	1249.70	59.32	36.15	-23.17	54.00	17.85	150	153	AV	Horizontal	PASS
8	1440.00	51.12	29.18	-21.94	54.00	24.82	150	117	AV	Horizontal	PASS
9	1624.80	54.51	33.73	-20.78	54.00	20.27	150	280	AV	Horizontal	PASS
10	2499.30	57.06	40.96	-16.10	54.00	13.04	150	113	AV	Horizontal	PASS
11	3750.00	47.23	36.56	-10.67	54.00	17.44	150	178	AV	Horizontal	PASS
12	4627.80	44.55	37.38	-7.17	54.00	16.62	150	321	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

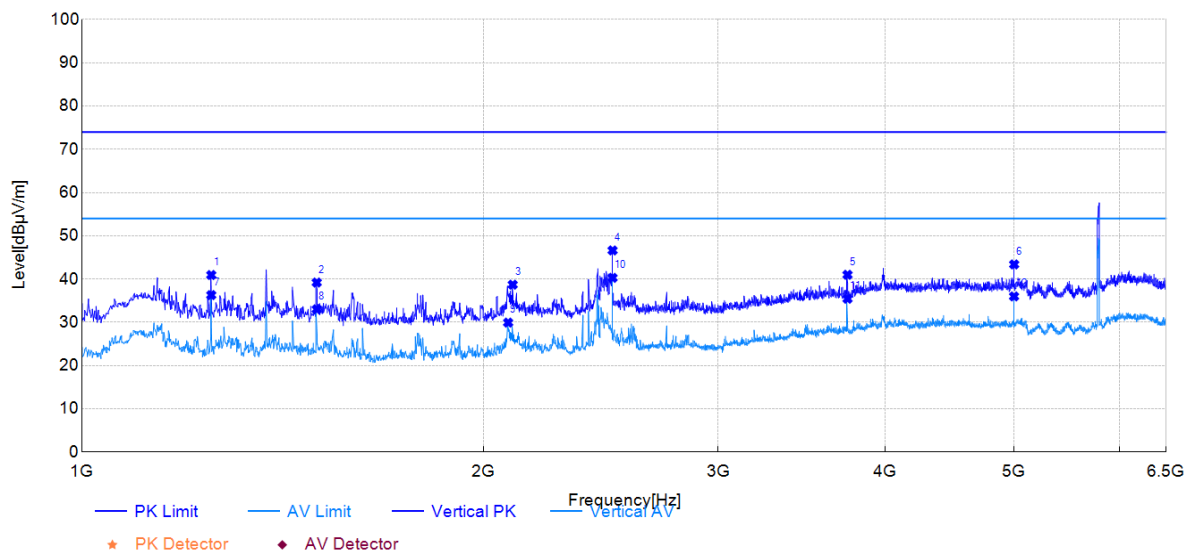


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	63.26	40.94	-22.32	74.00	33.06	150	156	PK	Vertical	PASS
2	1499.40	60.05	39.20	-20.85	74.00	34.80	150	106	PK	Vertical	PASS
3	2103.30	56.29	38.70	-17.59	74.00	35.30	150	85	PK	Vertical	PASS
4	2499.30	62.62	46.62	-16.00	74.00	27.38	150	125	PK	Vertical	PASS
5	3750.00	51.01	40.99	-10.02	74.00	33.01	150	213	PK	Vertical	PASS
6	5000.70	50.11	43.39	-6.72	74.00	30.61	150	197	PK	Vertical	PASS
7	1249.70	58.62	36.30	-22.32	54.00	17.70	150	156	AV	Vertical	PASS
8	1499.40	53.85	33.00	-20.85	54.00	21.00	150	106	AV	Vertical	PASS
9	2086.80	47.60	29.93	-17.67	54.00	24.07	150	85	AV	Vertical	PASS
10	2499.30	56.28	40.28	-16.00	54.00	13.72	150	125	AV	Vertical	PASS
11	3750.00	45.46	35.44	-10.02	54.00	18.56	150	233	AV	Vertical	PASS
12	4999.60	42.71	35.99	-6.72	54.00	18.01	150	187	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11a-CDD	Test Date:	2026-06-03
Test Channel:	5825MHz	Test Engineer:	Jawb Cai

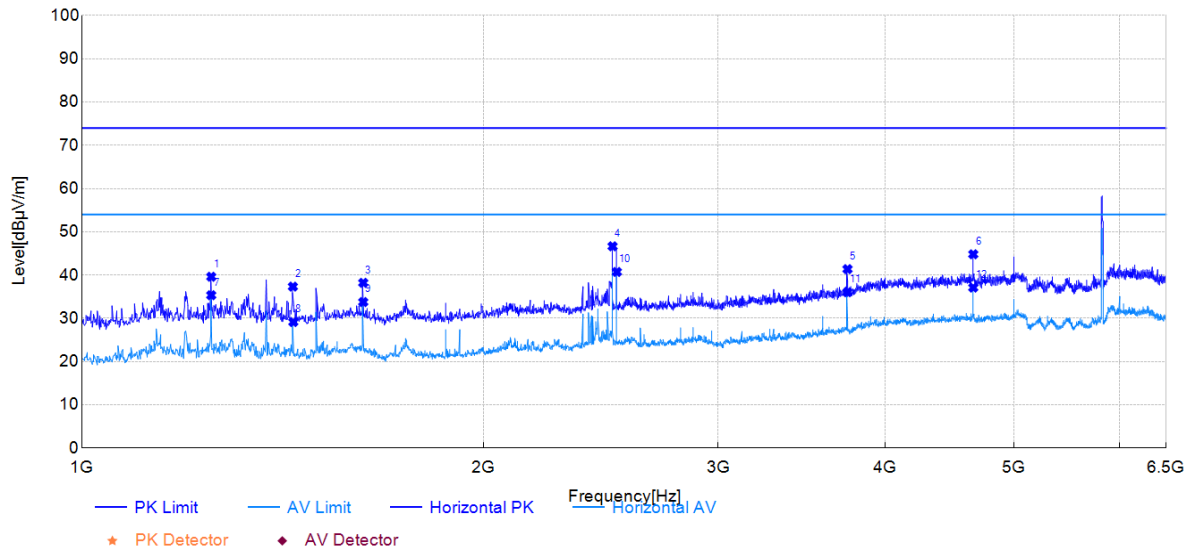

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	62.78	39.61	-23.17	74.00	34.39	150	148	PK	Horizontal	PASS
2	1438.90	59.28	37.33	-21.95	74.00	36.67	150	117	PK	Horizontal	PASS
3	1624.80	58.99	38.21	-20.78	74.00	35.79	150	235	PK	Horizontal	PASS
4	2499.30	62.75	46.65	-16.10	74.00	27.35	150	107	PK	Horizontal	PASS
5	3750.00	52.04	41.37	-10.67	74.00	32.63	150	179	PK	Horizontal	PASS
6	4659.70	51.98	44.81	-7.17	74.00	29.19	150	321	PK	Horizontal	PASS
7	1249.70	58.51	35.34	-23.17	54.00	18.66	150	154	AV	Horizontal	PASS
8	1440.00	51.08	29.14	-21.94	54.00	24.86	150	113	AV	Horizontal	PASS
9	1624.80	54.54	33.76	-20.78	54.00	20.24	150	280	AV	Horizontal	PASS
10	2518.00	56.75	40.72	-16.03	54.00	13.28	150	276	AV	Horizontal	PASS
11	3750.00	46.70	36.03	-10.67	54.00	17.97	150	183	AV	Horizontal	PASS
12	4659.70	44.27	37.10	-7.17	54.00	16.90	150	326	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

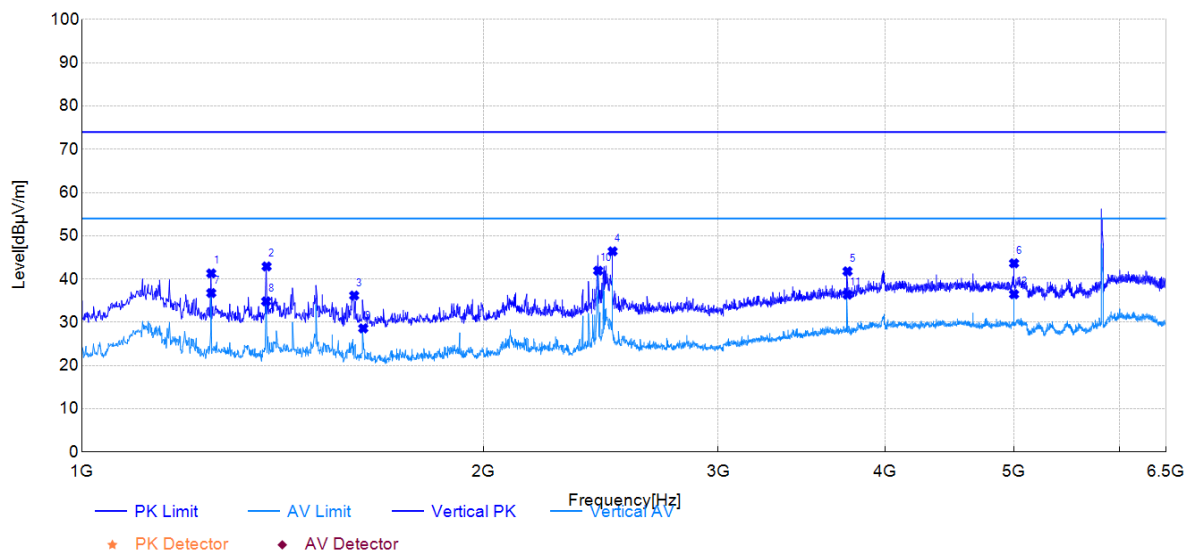


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	63.63	41.31	-22.32	74.00	32.69	150	160	PK	Vertical	PASS
2	1375.10	64.41	42.92	-21.49	74.00	31.08	150	156	PK	Vertical	PASS
3	1599.50	56.54	36.19	-20.35	74.00	37.81	150	60	PK	Vertical	PASS
4	2499.30	62.41	46.41	-16.00	74.00	27.59	150	125	PK	Vertical	PASS
5	3750.00	51.81	41.79	-10.02	74.00	32.21	150	60	PK	Vertical	PASS
6	4999.60	50.36	43.64	-6.72	74.00	30.36	150	196	PK	Vertical	PASS
7	1249.70	59.09	36.77	-22.32	54.00	17.23	150	160	AV	Vertical	PASS
8	1374.00	56.34	34.85	-21.49	54.00	19.15	150	156	AV	Vertical	PASS
9	1624.80	48.80	28.60	-20.20	54.00	25.40	150	288	AV	Vertical	PASS
10	2437.70	58.21	41.94	-16.27	54.00	12.06	150	359	AV	Vertical	PASS
11	3750.00	46.40	36.38	-10.02	54.00	17.62	150	60	AV	Vertical	PASS
12	4999.60	43.20	36.48	-6.72	54.00	17.52	150	196	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11be-EHT160	Test Date:	2026-06-03
Test Channel:	5250MHz	Test Engineer:	Jawb Cai

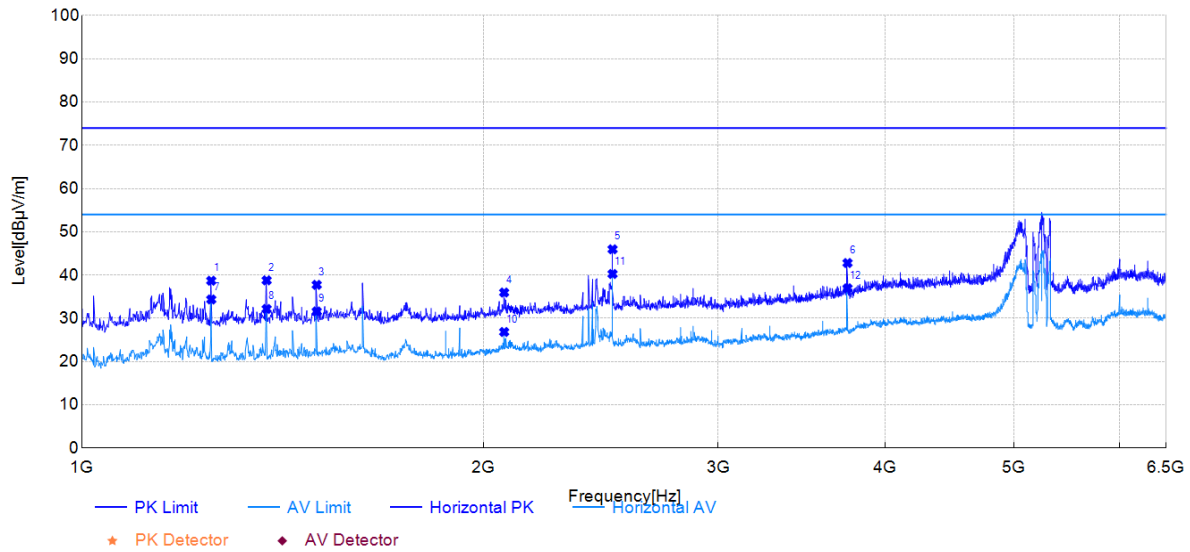

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	61.86	38.69	-23.17	74.00	35.31	150	158	PK	Horizontal	PASS
2	1375.10	61.09	38.78	-22.31	74.00	35.22	150	148	PK	Horizontal	PASS
3	1499.40	59.39	37.74	-21.65	74.00	36.26	150	111	PK	Horizontal	PASS
4	2072.50	53.62	35.96	-17.66	74.00	38.04	150	9	PK	Horizontal	PASS
5	2499.30	62.06	45.96	-16.10	74.00	28.04	150	101	PK	Horizontal	PASS
6	3750.00	53.46	42.79	-10.67	74.00	31.21	150	179	PK	Horizontal	PASS
7	1249.70	57.53	34.36	-23.17	54.00	19.64	150	158	AV	Horizontal	PASS
8	1375.10	54.47	32.16	-22.31	54.00	21.84	150	148	AV	Horizontal	PASS
9	1499.40	53.23	31.58	-21.65	54.00	22.42	150	107	AV	Horizontal	PASS
10	2072.50	44.50	26.84	-17.66	54.00	27.16	150	9	AV	Horizontal	PASS
11	2499.30	56.35	40.25	-16.10	54.00	13.75	150	107	AV	Horizontal	PASS
12	3750.00	47.60	36.93	-10.67	54.00	17.07	150	179	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

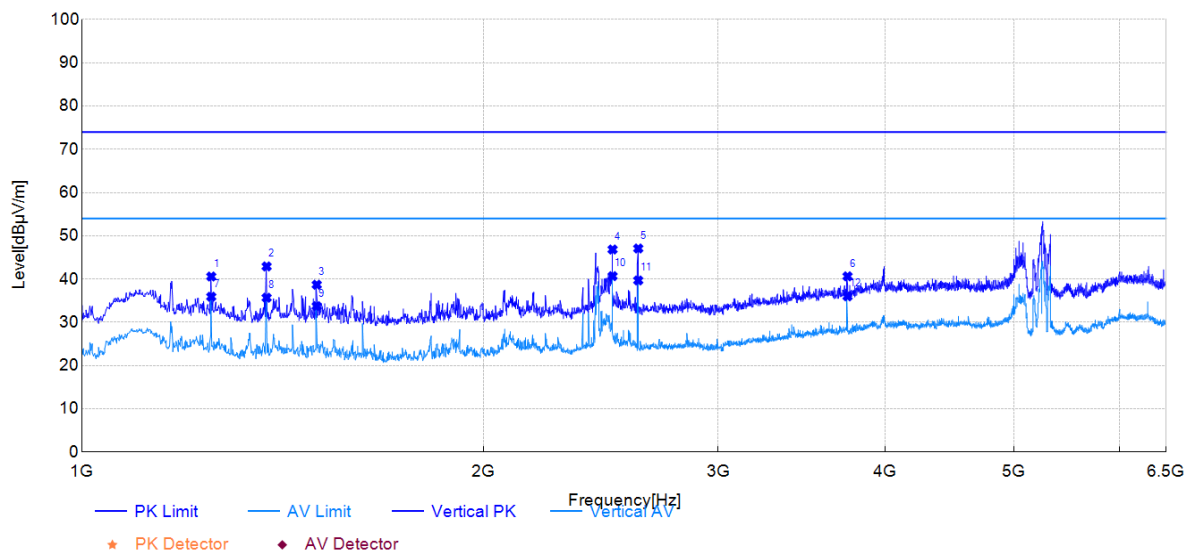


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	62.91	40.59	-22.32	74.00	33.41	150	167	PK	Vertical	PASS
2	1375.10	64.41	42.92	-21.49	74.00	31.08	150	81	PK	Vertical	PASS
3	1499.40	59.54	38.69	-20.85	74.00	35.31	150	81	PK	Vertical	PASS
4	2499.30	62.84	46.84	-16.00	74.00	27.16	150	126	PK	Vertical	PASS
5	2612.60	62.64	47.07	-15.57	74.00	26.93	150	360	PK	Vertical	PASS
6	3750.00	50.65	40.63	-10.02	74.00	33.37	150	229	PK	Vertical	PASS
7	1249.70	58.24	35.92	-22.32	54.00	18.08	150	158	AV	Vertical	PASS
8	1375.10	57.17	35.68	-21.49	54.00	18.32	150	152	AV	Vertical	PASS
9	1499.40	54.59	33.74	-20.85	54.00	20.26	150	142	AV	Vertical	PASS
10	2499.30	56.67	40.67	-16.00	54.00	13.33	150	126	AV	Vertical	PASS
11	2612.60	55.25	39.68	-15.57	54.00	14.32	150	360	AV	Vertical	PASS
12	3750.00	46.03	36.01	-10.02	54.00	17.99	150	229	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11be-EHT160	Test Date:	2026-06-03
Test Channel:	5570MHz	Test Engineer:	Jawb Cai

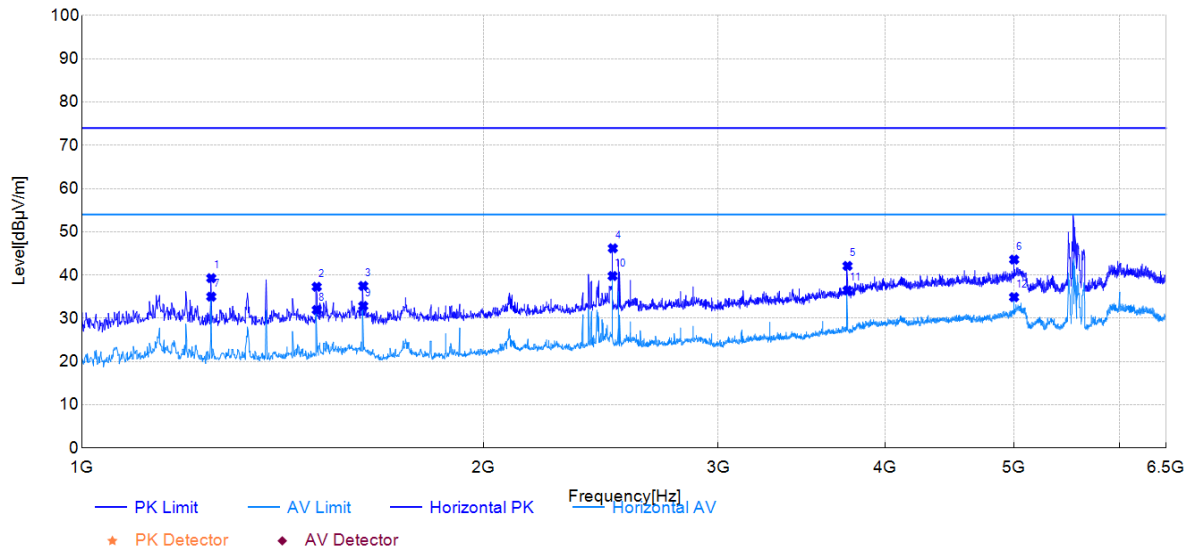

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	62.45	39.28	-23.17	74.00	34.72	150	163	PK	Horizontal	PASS
2	1499.40	58.94	37.29	-21.65	74.00	36.71	150	50	PK	Horizontal	PASS
3	1624.80	58.26	37.48	-20.78	74.00	36.52	150	70	PK	Horizontal	PASS
4	2500.40	62.29	46.19	-16.10	74.00	27.81	150	101	PK	Horizontal	PASS
5	3750.00	52.78	42.11	-10.67	74.00	31.89	150	178	PK	Horizontal	PASS
6	5000.70	49.70	43.58	-6.12	74.00	30.42	150	0	PK	Horizontal	PASS
7	1249.70	58.17	35.00	-23.17	54.00	19.00	150	163	AV	Horizontal	PASS
8	1499.40	53.58	31.93	-21.65	54.00	22.07	150	50	AV	Horizontal	PASS
9	1624.80	53.63	32.85	-20.78	54.00	21.15	150	70	AV	Horizontal	PASS
10	2499.30	55.88	39.78	-16.10	54.00	14.22	150	101	AV	Horizontal	PASS
11	3750.00	47.11	36.44	-10.67	54.00	17.56	150	178	AV	Horizontal	PASS
12	4999.60	41.01	34.89	-6.12	54.00	19.11	150	291	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

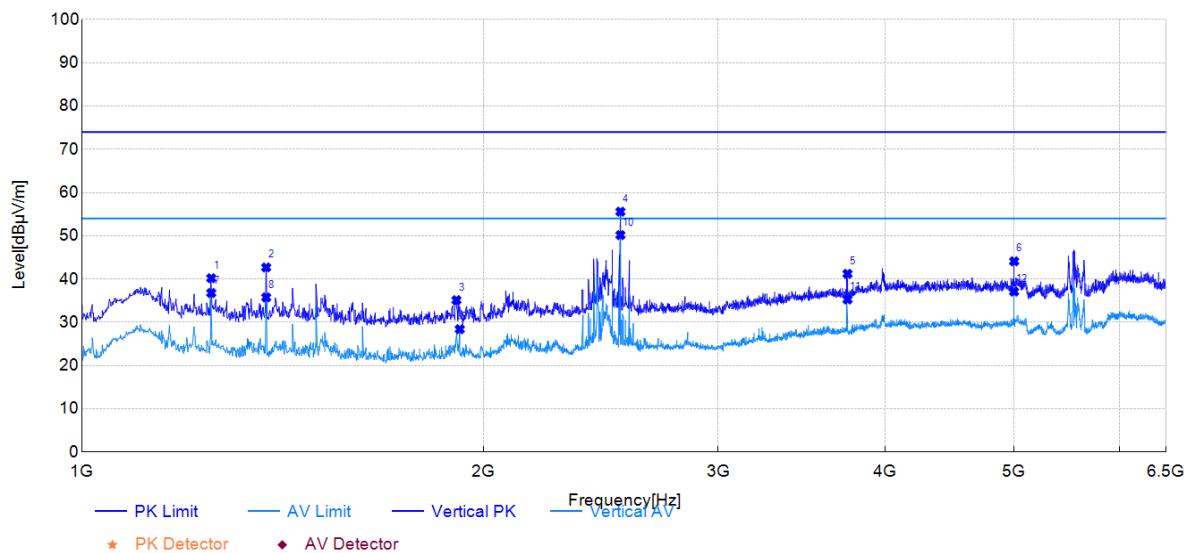


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	62.51	40.19	-22.32	74.00	33.81	150	167	PK	Vertical	PASS
2	1374.00	64.18	42.69	-21.49	74.00	31.31	150	152	PK	Vertical	PASS
3	1908.60	53.85	35.13	-18.72	74.00	38.87	150	122	PK	Vertical	PASS
4	2533.40	71.47	55.59	-15.88	74.00	18.41	150	20	PK	Vertical	PASS
5	3750.00	51.24	41.22	-10.02	74.00	32.78	150	228	PK	Vertical	PASS
6	5000.70	50.83	44.11	-6.72	74.00	29.89	150	102	PK	Vertical	PASS
7	1249.70	59.10	36.78	-22.32	54.00	17.22	150	162	AV	Vertical	PASS
8	1374.00	57.25	35.76	-21.49	54.00	18.24	150	152	AV	Vertical	PASS
9	1919.60	47.05	28.41	-18.64	54.00	25.59	150	136	AV	Vertical	PASS
10	2533.40	66.05	50.17	-15.88	54.00	3.83	150	20	AV	Vertical	PASS
11	3750.00	45.29	35.27	-10.02	54.00	18.73	150	55	AV	Vertical	PASS
12	4999.60	43.82	37.10	-6.72	54.00	16.90	150	193	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

6.5GHz-18GHz


Test Mode:	802.11a-CDD	Test Date:	2026-06-03
Test Channel:	5180MHz	Test Engineer:	Jawb Cai

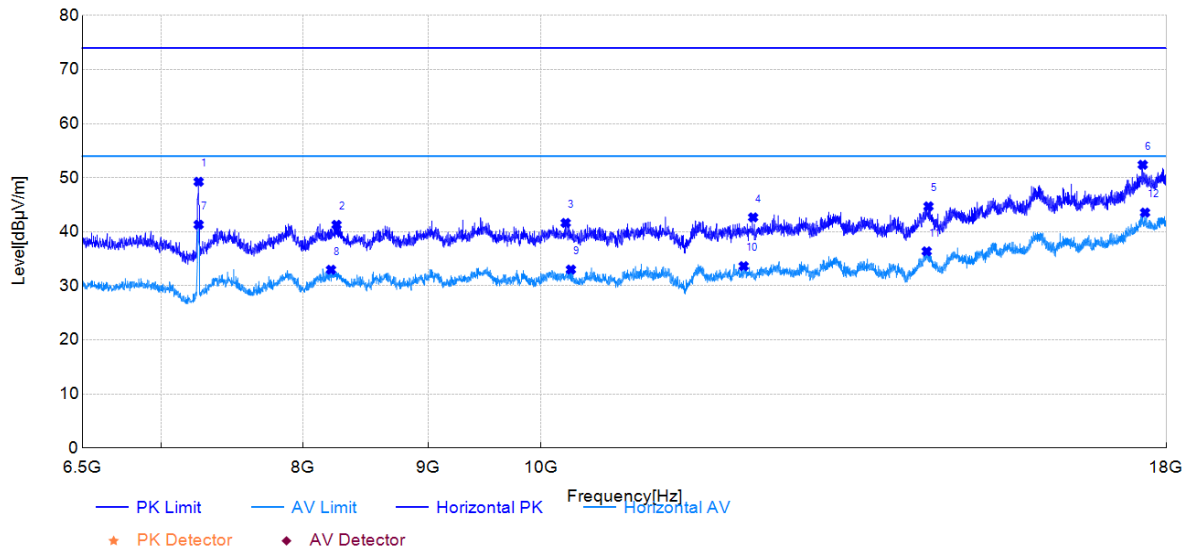

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7251.81	53.12	49.26	-3.86	74.00	24.74	150	298	PK	Horizontal	PASS
2	8255.19	42.75	41.30	-1.45	74.00	32.70	150	268	PK	Horizontal	PASS
3	10238.94	41.69	41.64	-0.05	74.00	32.36	150	335	PK	Horizontal	PASS
4	12211.19	40.97	42.67	1.70	74.00	31.33	150	356	PK	Horizontal	PASS
5	14399.06	39.64	44.71	5.07	74.00	29.29	150	328	PK	Horizontal	PASS
6	17610.44	38.39	52.40	14.01	74.00	21.60	150	166	PK	Horizontal	PASS
7	7251.81	45.18	41.32	-3.86	54.00	12.68	150	305	AV	Horizontal	PASS
8	8212.06	34.57	32.98	-1.59	54.00	21.02	150	9	AV	Horizontal	PASS
9	10289.25	33.07	33.02	-0.05	54.00	20.98	150	275	AV	Horizontal	PASS
10	12103.38	32.17	33.65	1.48	54.00	20.35	150	321	AV	Horizontal	PASS
11	14374.63	31.43	36.39	4.96	54.00	17.61	150	335	AV	Horizontal	PASS
12	17649.25	29.78	43.56	13.78	54.00	10.44	150	116	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

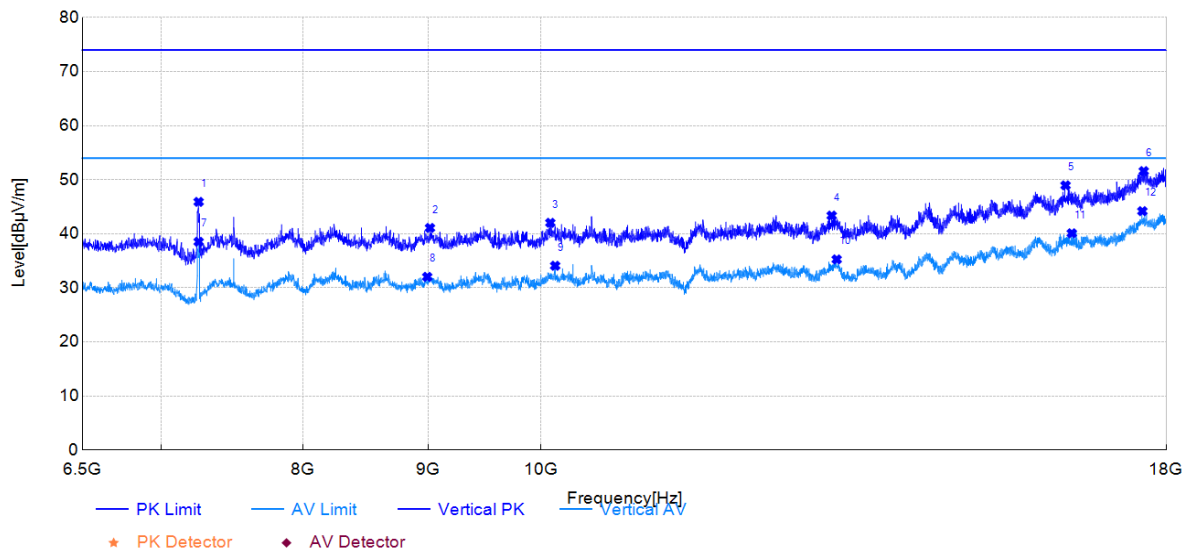


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7251.81	49.62	45.91	-3.71	74.00	28.09	150	252	PK	Vertical	PASS
2	9012.75	42.17	41.09	-1.08	74.00	32.91	150	25	PK	Vertical	PASS
3	10092.31	41.92	42.04	0.12	74.00	31.96	150	84	PK	Vertical	PASS
4	13147.00	40.67	43.37	2.70	74.00	30.63	150	201	PK	Vertical	PASS
5	16378.50	39.26	48.96	9.70	74.00	25.04	150	359	PK	Vertical	PASS
6	17627.69	37.09	51.60	14.51	74.00	22.40	150	355	PK	Vertical	PASS
7	7251.81	42.24	38.53	-3.71	54.00	15.47	150	252	AV	Vertical	PASS
8	8989.75	33.16	32.04	-1.12	54.00	21.96	150	106	AV	Vertical	PASS
9	10138.31	34.00	34.09	0.09	54.00	19.91	150	266	AV	Vertical	PASS
10	13208.81	32.40	35.27	2.87	54.00	18.73	150	149	AV	Vertical	PASS
11	16474.81	30.50	40.10	9.60	54.00	13.90	150	185	AV	Vertical	PASS
12	17604.69	29.54	44.19	14.65	54.00	9.81	150	185	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11a-CDD	Test Date:	2026-06-03
Test Channel:	5220MHz	Test Engineer:	Jawb Cai

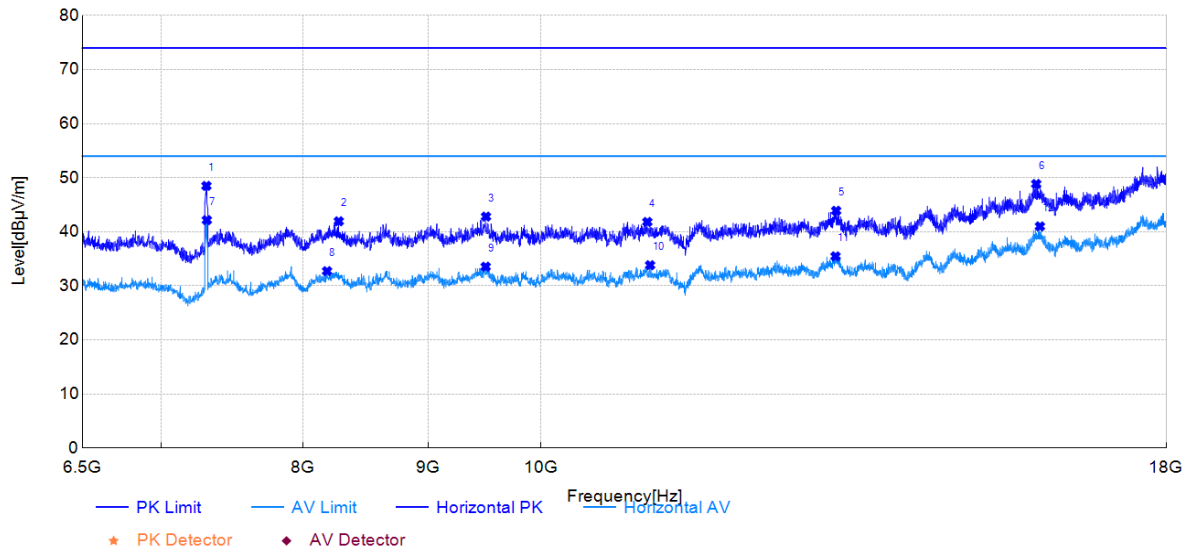

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7305.00	51.92	48.50	-3.42	74.00	25.50	150	306	PK	Horizontal	PASS
2	8272.44	43.34	41.95	-1.39	74.00	32.05	150	0	PK	Horizontal	PASS
3	9500.06	42.47	42.82	0.35	74.00	31.18	150	350	PK	Horizontal	PASS
4	11055.44	40.60	41.83	1.23	74.00	32.17	150	175	PK	Horizontal	PASS
5	13201.63	40.42	43.90	3.48	74.00	30.10	150	15	PK	Horizontal	PASS
6	15932.88	39.24	48.86	9.62	74.00	25.14	150	1	PK	Horizontal	PASS
7	7307.88	45.57	42.17	-3.40	54.00	11.83	150	299	AV	Horizontal	PASS
8	8181.88	34.27	32.73	-1.54	54.00	21.27	150	219	AV	Horizontal	PASS
9	9497.19	33.22	33.55	0.33	54.00	20.45	150	211	AV	Horizontal	PASS
10	11084.19	32.78	33.83	1.05	54.00	20.17	150	360	AV	Horizontal	PASS
11	13194.44	32.01	35.47	3.46	54.00	18.53	150	0	AV	Horizontal	PASS
12	15988.94	31.42	41.01	9.59	54.00	12.99	150	262	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

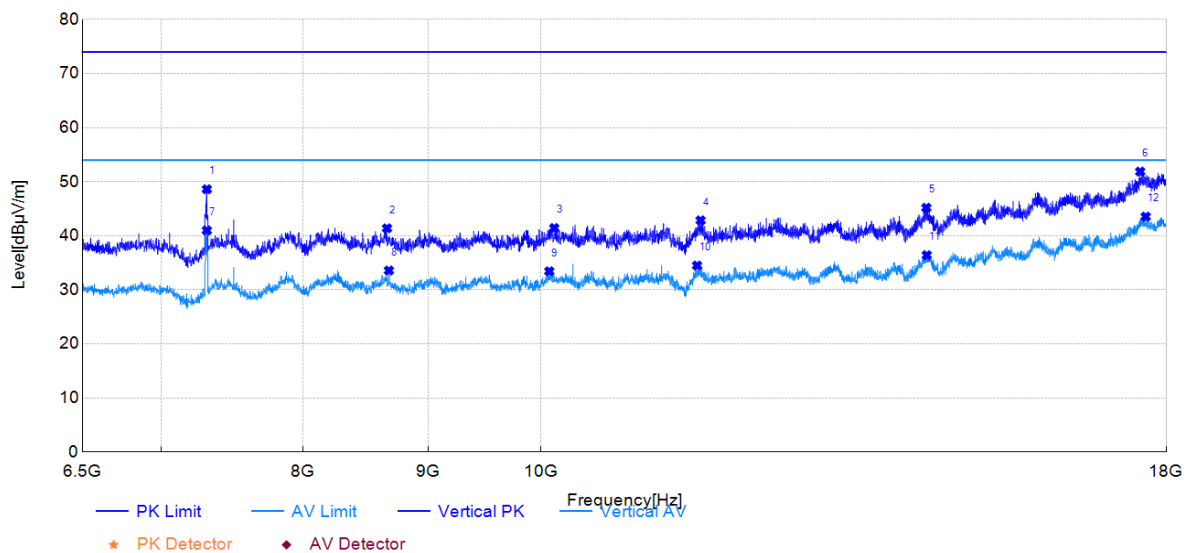


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7307.88	51.93	48.62	-3.31	74.00	25.38	150	268	PK	Vertical	PASS
2	8656.25	42.67	41.39	-1.28	74.00	32.61	150	356	PK	Vertical	PASS
3	10129.69	41.34	41.44	0.10	74.00	32.56	150	173	PK	Vertical	PASS
4	11623.25	41.08	42.86	1.78	74.00	31.14	150	166	PK	Vertical	PASS
5	14370.31	39.82	45.19	5.37	74.00	28.81	150	173	PK	Vertical	PASS
6	17568.75	37.50	51.88	14.38	74.00	22.12	150	304	PK	Vertical	PASS
7	7307.88	44.31	41.00	-3.31	54.00	13.00	150	253	AV	Vertical	PASS
8	8672.06	34.85	33.58	-1.27	54.00	20.42	150	70	AV	Vertical	PASS
9	10082.25	33.32	33.44	0.12	54.00	20.56	150	360	AV	Vertical	PASS
10	11584.44	32.79	34.50	1.71	54.00	19.50	150	187	AV	Vertical	PASS
11	14376.06	31.03	36.42	5.39	54.00	17.58	150	359	AV	Vertical	PASS
12	17660.75	29.24	43.55	14.31	54.00	10.45	150	356	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11a-CDD	Test Date:	2026-06-03
Test Channel:	5240MHz	Test Engineer:	Jawb Cai

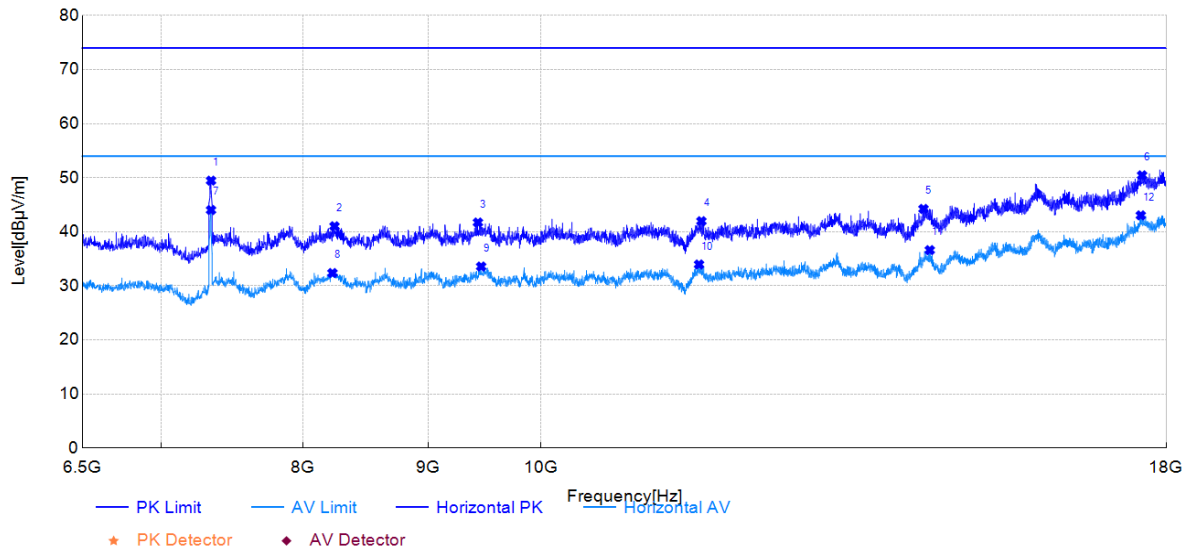

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7336.63	52.64	49.47	-3.17	74.00	24.53	150	305	PK	Horizontal	PASS
2	8239.38	42.53	41.03	-1.50	74.00	32.97	150	319	PK	Horizontal	PASS
3	9428.19	41.96	41.73	-0.23	74.00	32.27	150	260	PK	Horizontal	PASS
4	11631.88	40.63	41.97	1.34	74.00	32.03	150	0	PK	Horizontal	PASS
5	14331.50	39.47	44.24	4.77	74.00	29.76	150	202	PK	Horizontal	PASS
6	17600.38	36.37	50.45	14.08	74.00	23.55	150	119	PK	Horizontal	PASS
7	7336.63	47.20	44.03	-3.17	54.00	9.97	150	305	AV	Horizontal	PASS
8	8223.56	33.93	32.38	-1.55	54.00	21.62	150	231	AV	Horizontal	PASS
9	9456.94	33.58	33.58	0.00	54.00	20.42	150	297	AV	Horizontal	PASS
10	11606.00	32.36	33.96	1.60	54.00	20.04	150	187	AV	Horizontal	PASS
11	14416.31	31.69	36.62	4.93	54.00	17.38	150	283	AV	Horizontal	PASS
12	17578.81	29.16	43.04	13.88	54.00	10.96	150	202	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

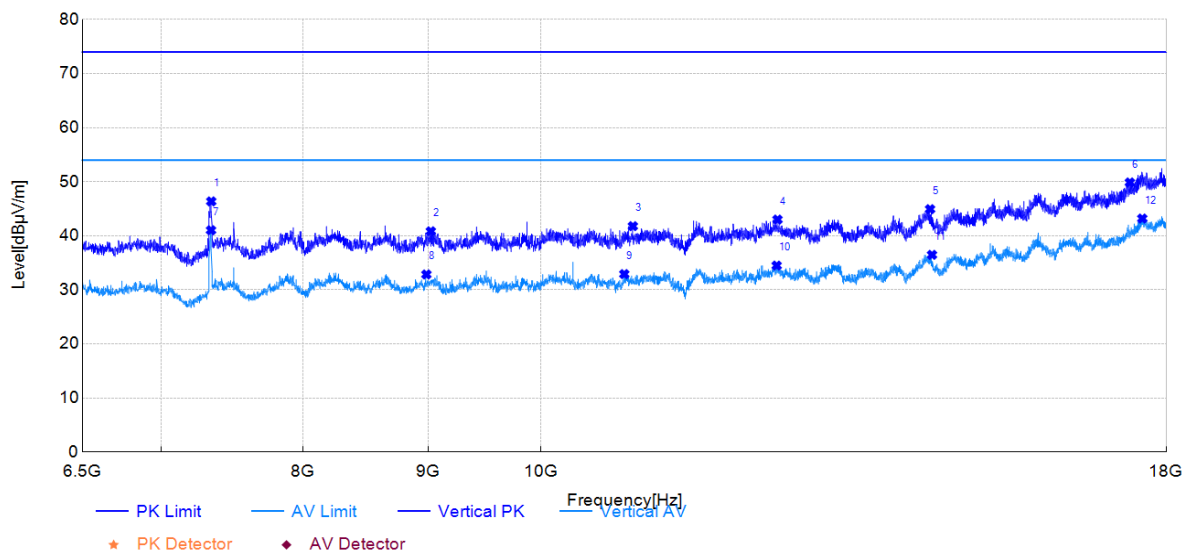


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7338.06	49.46	46.37	-3.09	74.00	27.63	150	225	PK	Vertical	PASS
2	9019.94	41.92	40.84	-1.08	74.00	33.16	150	358	PK	Vertical	PASS
3	10905.94	40.81	41.79	0.98	74.00	32.21	150	194	PK	Vertical	PASS
4	12494.38	40.17	43.01	2.84	74.00	30.99	150	359	PK	Vertical	PASS
5	14420.63	39.65	44.93	5.28	74.00	29.07	150	142	PK	Vertical	PASS
6	17399.13	36.55	49.87	13.32	74.00	24.13	150	351	PK	Vertical	PASS
7	7336.63	44.13	41.03	-3.10	54.00	12.97	150	269	AV	Vertical	PASS
8	8982.56	33.99	32.85	-1.14	54.00	21.15	150	225	AV	Vertical	PASS
9	10818.25	32.28	32.92	0.64	54.00	21.08	150	194	AV	Vertical	PASS
10	12484.31	31.69	34.50	2.81	54.00	19.50	150	360	AV	Vertical	PASS
11	14446.50	31.45	36.48	5.03	54.00	17.52	150	333	AV	Vertical	PASS
12	17603.25	28.54	43.20	14.66	54.00	10.80	150	135	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11a-CDD	Test Date:	2026-06-03
Test Channel:	5260MHz	Test Engineer:	Jawb Cai

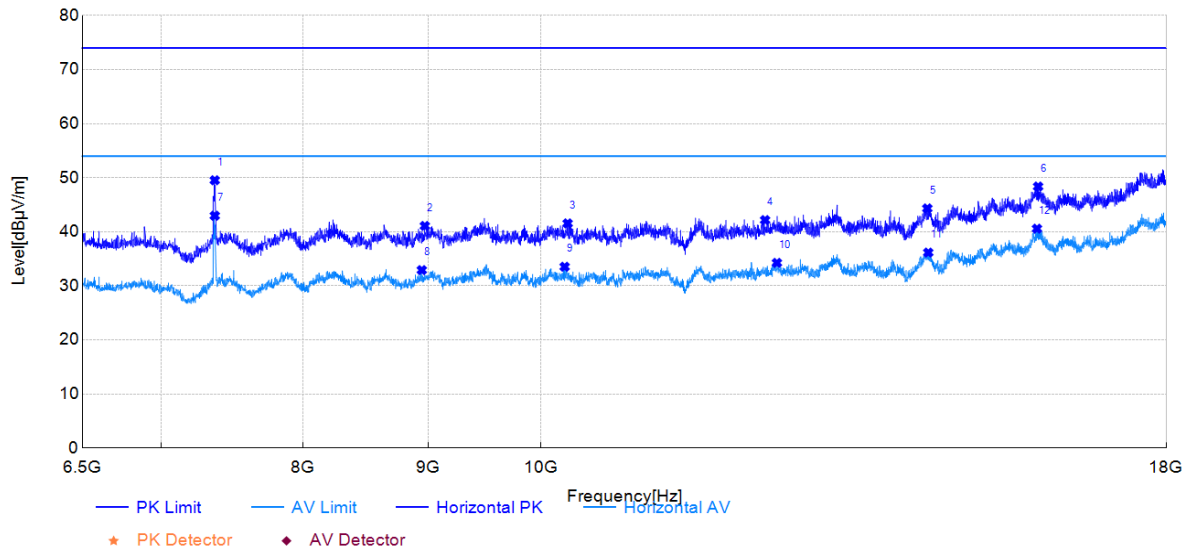

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7362.50	52.48	49.54	-2.94	74.00	24.46	150	283	PK	Horizontal	PASS
2	8969.63	41.82	41.09	-0.73	74.00	32.91	150	83	PK	Horizontal	PASS
3	10257.63	41.61	41.56	-0.05	74.00	32.44	150	40	PK	Horizontal	PASS
4	12349.19	40.31	42.17	1.86	74.00	31.83	150	4	PK	Horizontal	PASS
5	14383.25	39.33	44.33	5.00	74.00	29.67	150	340	PK	Horizontal	PASS
6	15961.63	38.78	48.38	9.60	74.00	25.62	150	2	PK	Horizontal	PASS
7	7362.50	45.92	42.98	-2.94	54.00	11.02	150	283	AV	Horizontal	PASS
8	8943.75	33.77	32.92	-0.85	54.00	21.08	150	1	AV	Horizontal	PASS
9	10228.88	33.59	33.54	-0.05	54.00	20.46	150	134	AV	Horizontal	PASS
10	12487.19	31.93	34.26	2.33	54.00	19.74	150	319	AV	Horizontal	PASS
11	14396.19	31.11	36.16	5.05	54.00	17.84	150	233	AV	Horizontal	PASS
12	15944.38	30.97	40.58	9.61	54.00	13.42	150	276	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

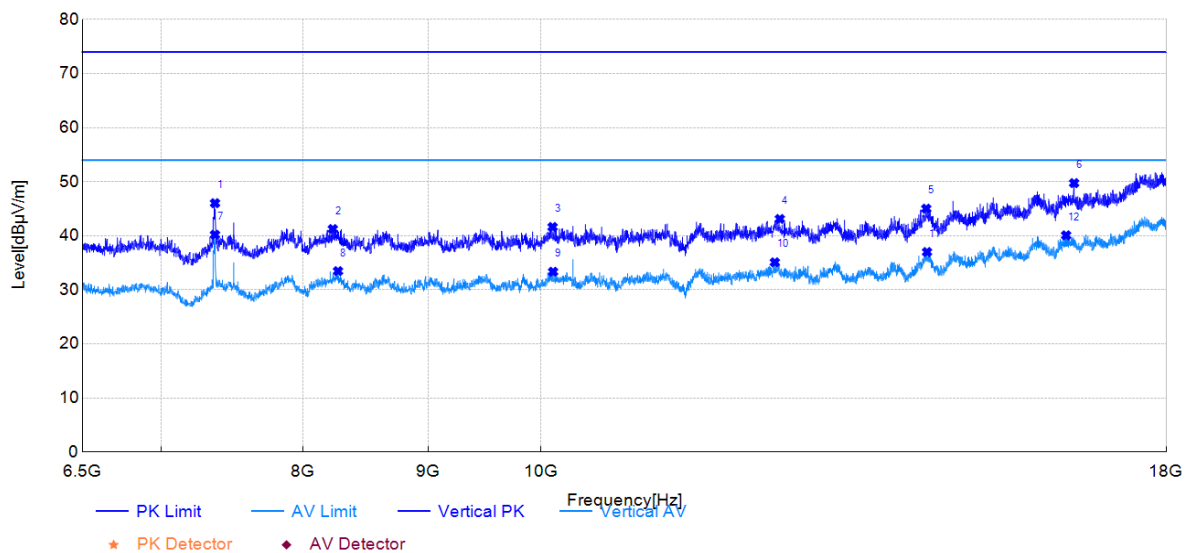


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7363.94	48.94	46.04	-2.90	74.00	27.96	150	290	PK	Vertical	PASS
2	8226.44	42.74	41.25	-1.49	74.00	32.75	150	153	PK	Vertical	PASS
3	10113.88	41.52	41.63	0.11	74.00	32.37	150	110	PK	Vertical	PASS
4	12521.69	40.35	43.12	2.77	74.00	30.88	150	359	PK	Vertical	PASS
5	14368.88	39.65	45.02	5.37	74.00	28.98	150	283	PK	Vertical	PASS
6	16510.75	40.25	49.75	9.50	74.00	24.25	150	359	PK	Vertical	PASS
7	7363.94	43.10	40.20	-2.90	54.00	13.80	150	253	AV	Vertical	PASS
8	8266.69	34.83	33.47	-1.36	54.00	20.53	150	241	AV	Vertical	PASS
9	10118.19	33.25	33.35	0.10	54.00	20.65	150	333	AV	Vertical	PASS
10	12462.75	32.32	35.10	2.78	54.00	18.90	150	176	AV	Vertical	PASS
11	14378.94	31.60	37.00	5.40	54.00	17.00	150	61	AV	Vertical	PASS
12	16387.13	30.33	40.09	9.76	54.00	13.91	150	359	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11a-CDD	Test Date:	2026-06-03
Test Channel:	5300MHz	Test Engineer:	Jawb Cai

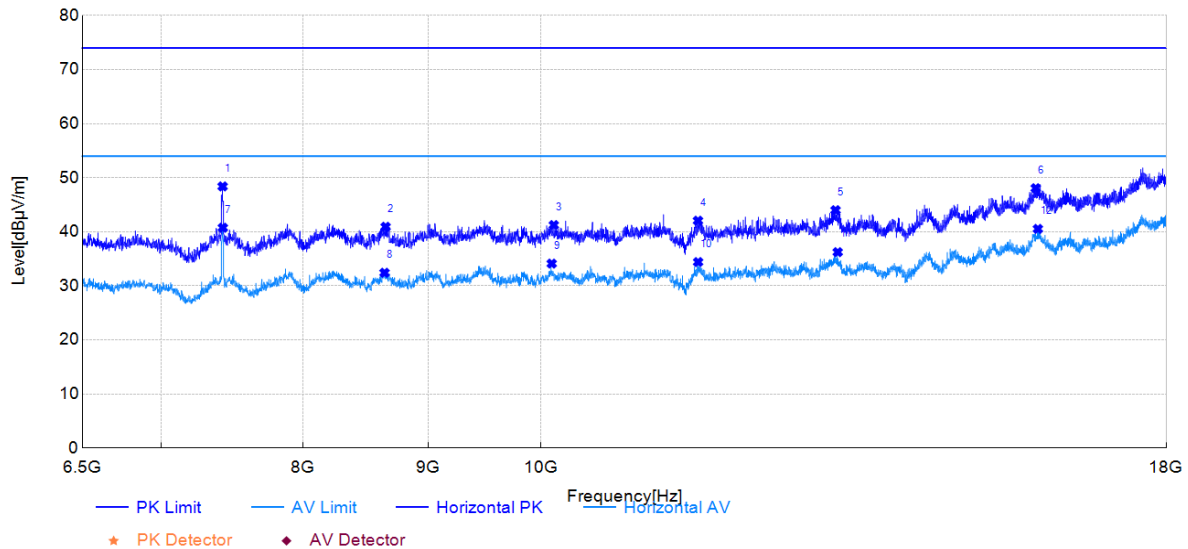

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7417.13	51.06	48.40	-2.66	74.00	25.60	150	283	PK	Horizontal	PASS
2	8644.75	42.16	40.93	-1.23	74.00	33.07	150	99	PK	Horizontal	PASS
3	10125.38	41.23	41.25	0.02	74.00	32.75	150	180	PK	Horizontal	PASS
4	11594.50	40.52	42.06	1.54	74.00	31.94	150	260	PK	Horizontal	PASS
5	13194.44	40.54	44.00	3.46	74.00	30.00	150	47	PK	Horizontal	PASS
6	15925.69	38.45	48.07	9.62	74.00	25.93	150	47	PK	Horizontal	PASS
7	7418.56	43.43	40.76	-2.67	54.00	13.24	150	283	AV	Horizontal	PASS
8	8636.13	33.67	32.43	-1.24	54.00	21.57	150	173	AV	Horizontal	PASS
9	10105.25	34.08	34.12	0.04	54.00	19.88	150	151	AV	Horizontal	PASS
10	11595.94	32.83	34.41	1.58	54.00	19.59	150	360	AV	Horizontal	PASS
11	13221.75	32.94	36.24	3.30	54.00	17.76	150	360	AV	Horizontal	PASS
12	15958.75	30.93	40.54	9.61	54.00	13.46	150	218	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

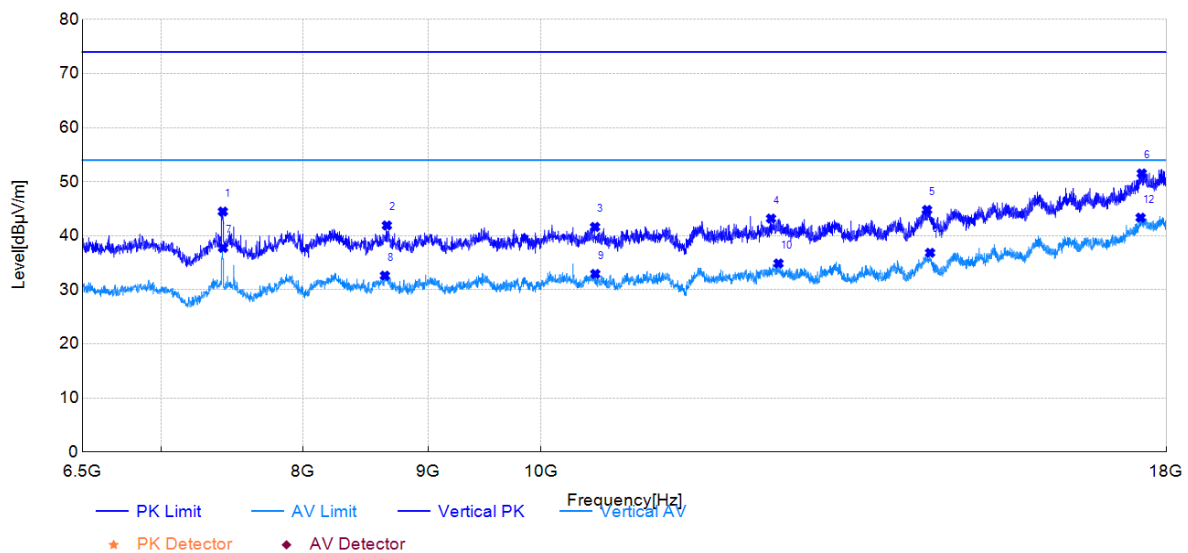


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7418.56	47.18	44.49	-2.69	74.00	29.51	150	317	PK	Vertical	PASS
2	8654.81	43.21	41.92	-1.29	74.00	32.08	150	310	PK	Vertical	PASS
3	10525.00	40.80	41.64	0.84	74.00	32.36	150	18	PK	Vertical	PASS
4	12418.19	40.51	43.20	2.69	74.00	30.80	150	344	PK	Vertical	PASS
5	14380.38	39.38	44.79	5.41	74.00	29.21	150	192	PK	Vertical	PASS
6	17594.63	36.91	51.54	14.63	74.00	22.46	150	265	PK	Vertical	PASS
7	7420.00	40.46	37.77	-2.69	54.00	16.23	150	265	AV	Vertical	PASS
8	8639.00	33.93	32.63	-1.30	54.00	21.37	150	296	AV	Vertical	PASS
9	10527.88	32.12	32.95	0.83	54.00	21.05	150	359	AV	Vertical	PASS
10	12505.88	32.06	34.89	2.83	54.00	19.11	150	200	AV	Vertical	PASS
11	14420.63	31.58	36.86	5.28	54.00	17.14	150	359	AV	Vertical	PASS
12	17575.94	28.90	43.36	14.46	54.00	10.64	150	38	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11a-CDD	Test Date:	2026-06-03
Test Channel:	5320MHz	Test Engineer:	Jawb Cai

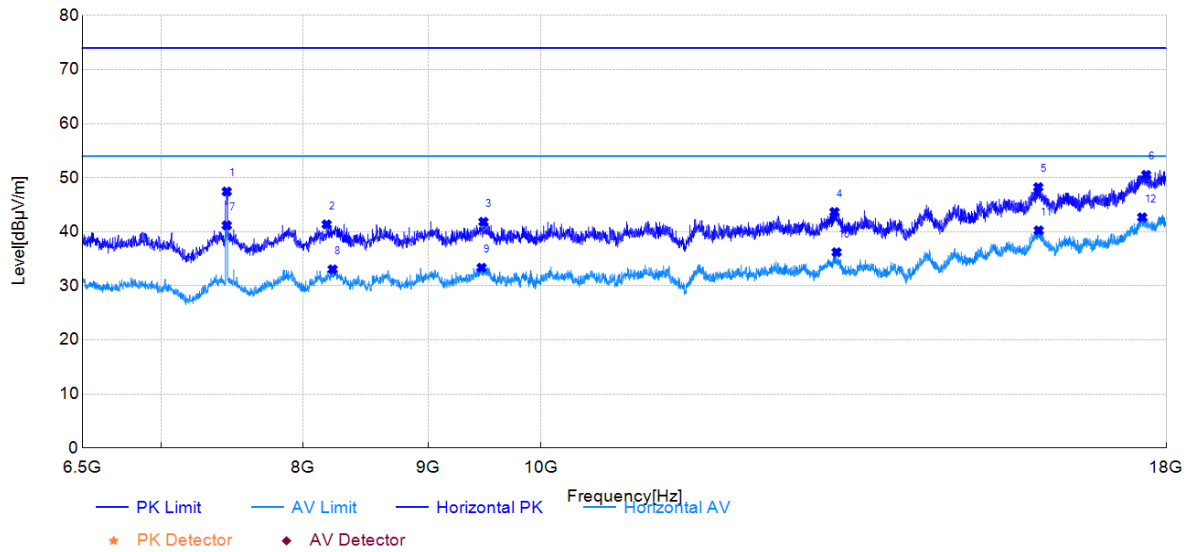

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7445.88	50.16	47.45	-2.71	74.00	26.55	150	283	PK	Horizontal	PASS
2	8179.00	42.91	41.37	-1.54	74.00	32.63	150	159	PK	Horizontal	PASS
3	9477.06	41.68	41.85	0.17	74.00	32.15	150	114	PK	Horizontal	PASS
4	13181.50	40.26	43.66	3.40	74.00	30.34	150	276	PK	Horizontal	PASS
5	15964.50	38.66	48.26	9.60	74.00	25.74	150	173	PK	Horizontal	PASS
6	17667.94	36.86	50.53	13.67	74.00	23.47	150	64	PK	Horizontal	PASS
7	7445.88	43.90	41.19	-2.71	54.00	12.81	150	283	AV	Horizontal	PASS
8	8225.00	34.59	33.05	-1.54	54.00	20.95	150	64	AV	Horizontal	PASS
9	9461.25	33.31	33.35	0.04	54.00	20.65	150	202	AV	Horizontal	PASS
10	13207.38	32.80	36.22	3.42	54.00	17.78	150	0	AV	Horizontal	PASS
11	15970.25	30.66	40.26	9.60	54.00	13.74	150	298	AV	Horizontal	PASS
12	17601.81	28.62	42.68	14.06	54.00	11.32	150	260	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

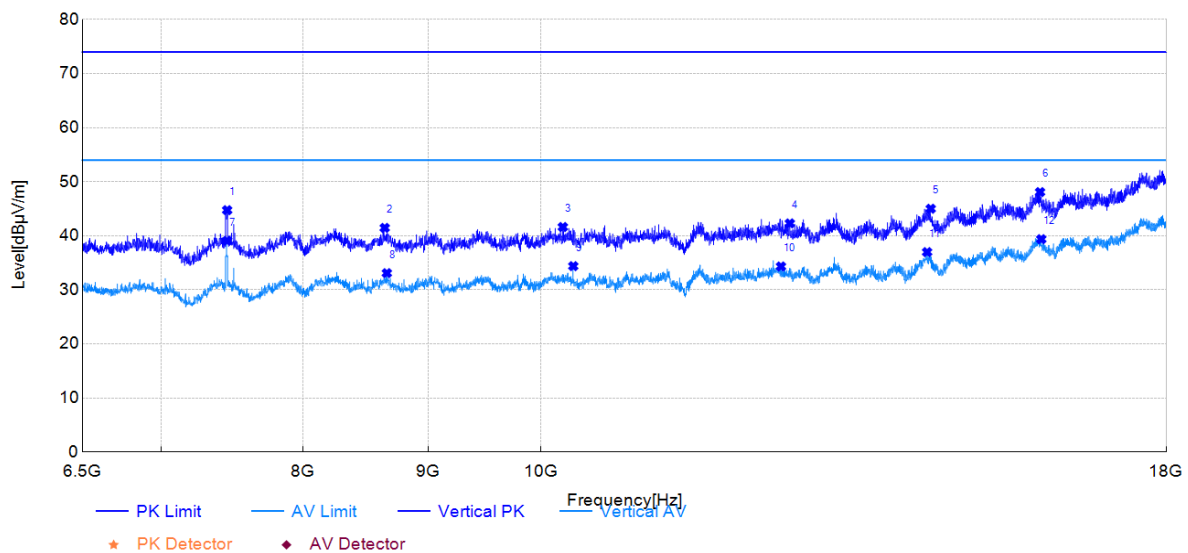


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7448.75	47.52	44.75	-2.77	74.00	29.25	150	296	PK	Vertical	PASS
2	8637.56	42.77	41.47	-1.30	74.00	32.53	150	288	PK	Vertical	PASS
3	10211.63	41.55	41.63	0.08	74.00	32.37	150	274	PK	Vertical	PASS
4	12639.56	40.15	42.30	2.15	74.00	31.70	150	33	PK	Vertical	PASS
5	14429.25	39.81	45.01	5.20	74.00	28.99	150	333	PK	Vertical	PASS
6	15990.38	39.09	48.09	9.00	74.00	25.91	150	85	PK	Vertical	PASS
7	7448.75	41.85	39.08	-2.77	54.00	14.92	150	267	AV	Vertical	PASS
8	8654.81	34.39	33.10	-1.29	54.00	20.90	150	99	AV	Vertical	PASS
9	10312.25	34.25	34.39	0.14	54.00	19.61	150	274	AV	Vertical	PASS
10	12534.63	31.59	34.33	2.74	54.00	19.67	150	319	AV	Vertical	PASS
11	14380.38	31.58	36.99	5.41	54.00	17.01	150	360	AV	Vertical	PASS
12	16009.06	30.52	39.38	8.86	54.00	14.62	150	180	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11a-CDD	Test Date:	2026-06-03
Test Channel:	5500MHz	Test Engineer:	Jawb Cai

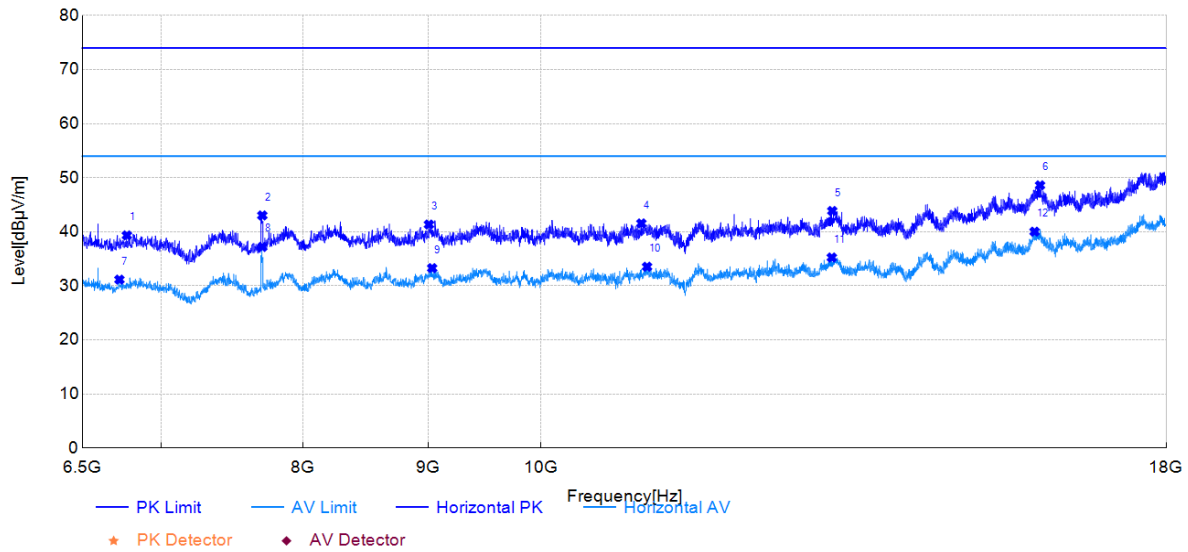

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6778.88	44.52	39.34	-5.18	74.00	34.66	150	284	PK	Horizontal	PASS
2	7698.88	45.65	43.03	-2.62	74.00	30.97	150	284	PK	Horizontal	PASS
3	9004.13	41.93	41.35	-0.58	74.00	32.65	150	20	PK	Horizontal	PASS
4	10993.63	39.98	41.56	1.58	74.00	32.44	150	277	PK	Horizontal	PASS
5	13154.19	40.59	43.86	3.27	74.00	30.14	150	144	PK	Horizontal	PASS
6	15990.38	39.01	48.60	9.59	74.00	25.40	150	168	PK	Horizontal	PASS
7	6731.44	36.71	31.16	-5.55	54.00	22.84	150	115	AV	Horizontal	PASS
8	7698.88	39.83	37.21	-2.62	54.00	16.79	150	284	AV	Horizontal	PASS
9	9031.44	33.85	33.28	-0.57	54.00	20.72	150	64	AV	Horizontal	PASS
10	11052.56	32.28	33.54	1.26	54.00	20.46	150	263	AV	Horizontal	PASS
11	13148.44	32.01	35.25	3.24	54.00	18.75	150	100	AV	Horizontal	PASS
12	15908.44	30.39	40.03	9.64	54.00	13.97	150	239	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

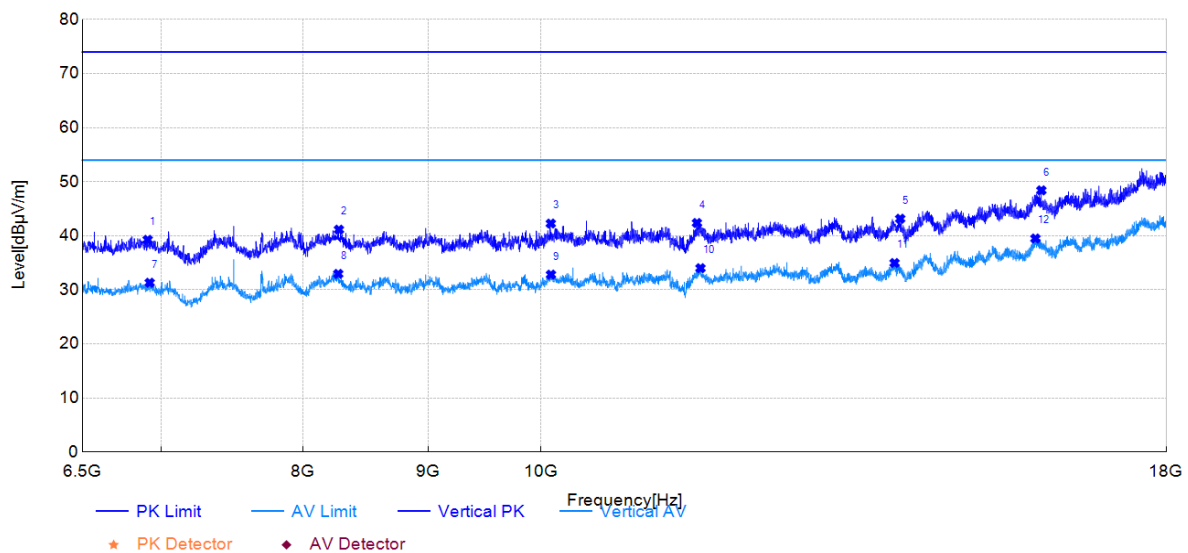


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6912.56	43.63	39.26	-4.37	74.00	34.74	150	157	PK	Vertical	PASS
2	8273.88	42.48	41.14	-1.34	74.00	32.86	150	25	PK	Vertical	PASS
3	10096.63	42.16	42.27	0.11	74.00	31.73	150	360	PK	Vertical	PASS
4	11583.00	40.70	42.38	1.68	74.00	31.62	150	91	PK	Vertical	PASS
5	14021.00	39.80	43.16	3.36	74.00	30.84	150	149	PK	Vertical	PASS
6	16010.50	39.57	48.41	8.84	74.00	25.59	150	244	PK	Vertical	PASS
7	6925.50	35.75	31.32	-4.43	54.00	22.68	150	289	AV	Vertical	PASS
8	8268.13	34.31	32.96	-1.35	54.00	21.04	150	360	AV	Vertical	PASS
9	10098.06	32.71	32.82	0.11	54.00	21.18	150	91	AV	Vertical	PASS
10	11621.81	32.22	34.01	1.79	54.00	19.99	150	237	AV	Vertical	PASS
11	13947.69	31.30	34.97	3.67	54.00	19.03	150	18	AV	Vertical	PASS
12	15921.38	30.41	39.50	9.09	54.00	14.50	150	157	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11a-CDD	Test Date:	2026-06-03
Test Channel:	5580MHz	Test Engineer:	Jawb Cai

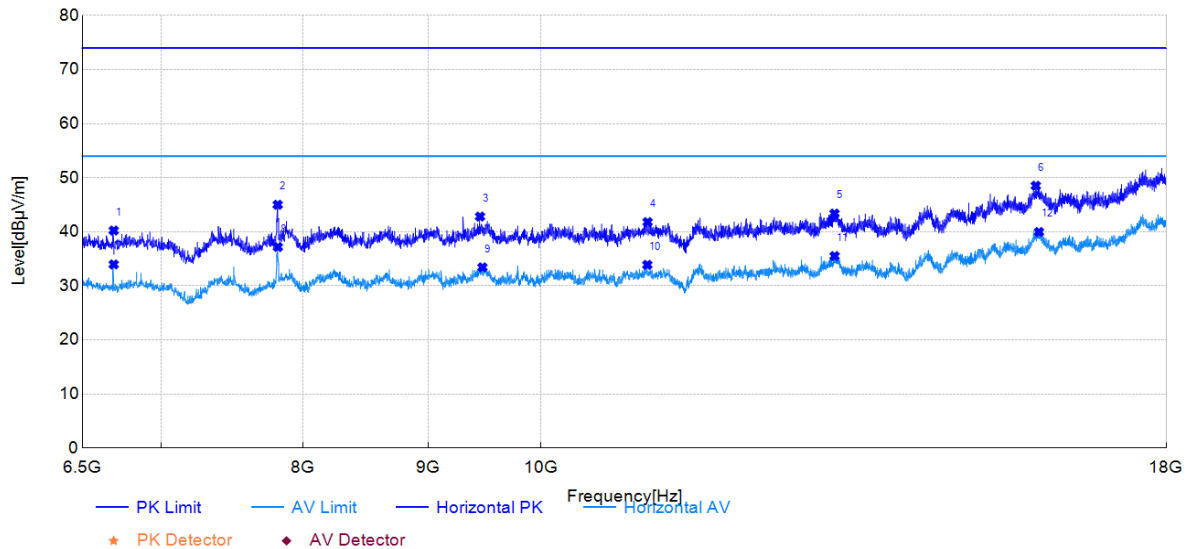

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6695.50	46.02	40.24	-5.78	74.00	33.76	150	254	PK	Horizontal	PASS
2	7811.00	47.90	45.01	-2.89	74.00	28.99	150	291	PK	Horizontal	PASS
3	9446.88	42.89	42.82	-0.07	74.00	31.18	150	20	PK	Horizontal	PASS
4	11058.31	40.59	41.81	1.22	74.00	32.19	150	189	PK	Horizontal	PASS
5	13181.50	39.98	43.38	3.40	74.00	30.62	150	15	PK	Horizontal	PASS
6	15927.13	38.90	48.52	9.62	74.00	25.48	150	137	PK	Horizontal	PASS
7	6695.50	39.75	33.97	-5.78	54.00	20.03	150	291	AV	Horizontal	PASS
8	7812.44	40.05	37.19	-2.86	54.00	16.81	150	298	AV	Horizontal	PASS
9	9468.44	33.33	33.43	0.10	54.00	20.57	150	211	AV	Horizontal	PASS
10	11055.44	32.66	33.89	1.23	54.00	20.11	150	9	AV	Horizontal	PASS
11	13182.94	32.11	35.52	3.41	54.00	18.48	150	270	AV	Horizontal	PASS
12	15974.56	30.37	39.97	9.60	54.00	14.03	150	115	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

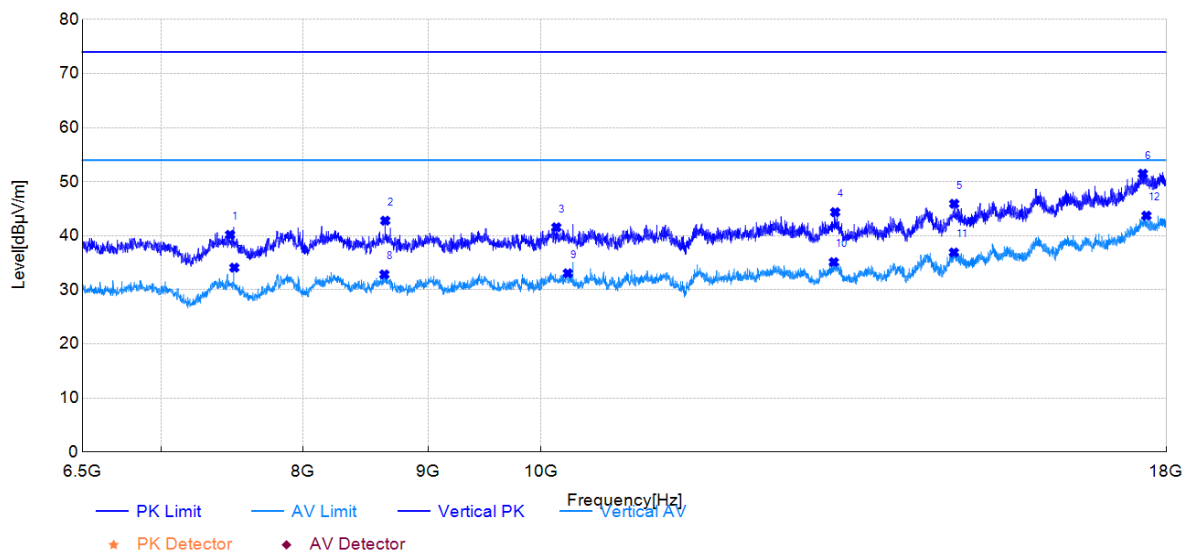


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7468.88	43.02	40.19	-2.83	74.00	33.81	150	46	PK	Vertical	PASS
2	8641.88	44.10	42.80	-1.30	74.00	31.20	150	253	PK	Vertical	PASS
3	10149.81	41.48	41.57	0.09	74.00	32.43	150	322	PK	Vertical	PASS
4	13190.13	41.47	44.37	2.90	74.00	29.63	150	194	PK	Vertical	PASS
5	14751.25	40.37	45.93	5.56	74.00	28.07	150	194	PK	Vertical	PASS
6	17613.31	36.89	51.49	14.60	74.00	22.51	150	225	PK	Vertical	PASS
7	7499.06	37.03	34.11	-2.92	54.00	19.89	150	106	AV	Vertical	PASS
8	8634.69	34.16	32.85	-1.31	54.00	21.15	150	77	AV	Vertical	PASS
9	10259.06	32.96	33.07	0.11	54.00	20.93	150	106	AV	Vertical	PASS
10	13172.88	32.30	35.13	2.83	54.00	18.87	150	106	AV	Vertical	PASS
11	14746.94	31.35	36.92	5.57	54.00	17.08	150	210	AV	Vertical	PASS
12	17672.25	29.48	43.72	14.24	54.00	10.28	150	298	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11a-CDD	Test Date:	2026-06-03
Test Channel:	5700MHz	Test Engineer:	Jawb Cai

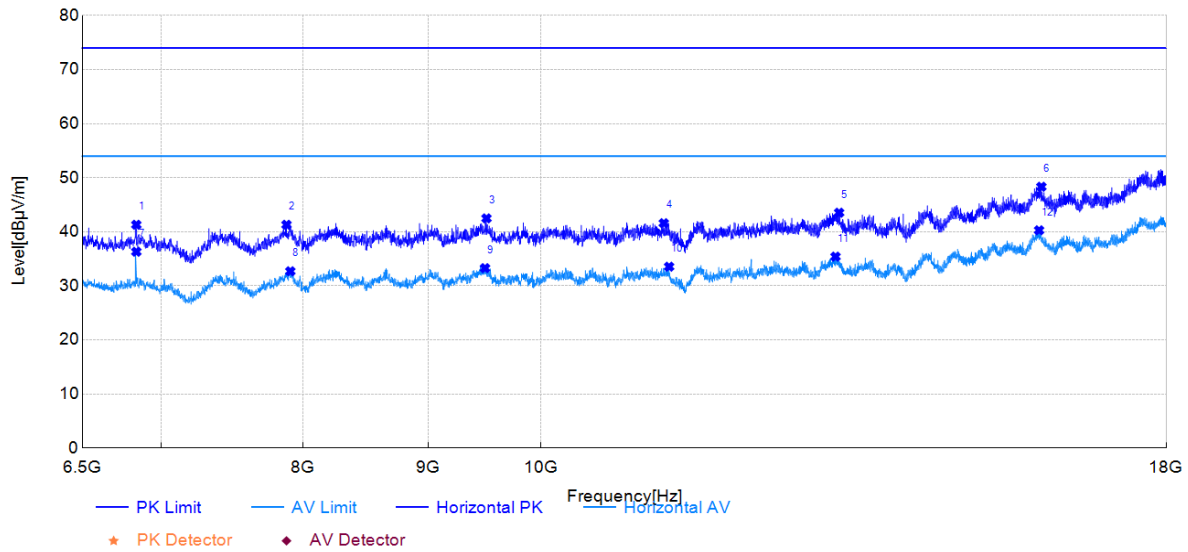

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6839.25	46.15	41.31	-4.84	74.00	32.69	150	291	PK	Horizontal	PASS
2	7875.69	42.89	41.31	-1.58	74.00	32.69	150	86	PK	Horizontal	PASS
3	9504.38	42.15	42.49	0.34	74.00	31.51	150	20	PK	Horizontal	PASS
4	11227.94	40.56	41.60	1.04	74.00	32.40	150	86	PK	Horizontal	PASS
5	13239.00	40.40	43.54	3.14	74.00	30.46	150	360	PK	Horizontal	PASS
6	16010.50	38.93	48.34	9.41	74.00	25.66	150	2	PK	Horizontal	PASS
7	6839.25	41.16	36.32	-4.84	54.00	17.68	150	298	AV	Horizontal	PASS
8	7904.44	33.81	32.70	-1.11	54.00	21.30	150	298	AV	Horizontal	PASS
9	9491.44	33.00	33.28	0.28	54.00	20.72	150	321	AV	Horizontal	PASS
10	11284.00	32.45	33.55	1.10	54.00	20.45	150	0	AV	Horizontal	PASS
11	13194.44	31.95	35.41	3.46	54.00	18.59	150	298	AV	Horizontal	PASS
12	15976.00	30.70	40.29	9.59	54.00	13.71	150	116	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

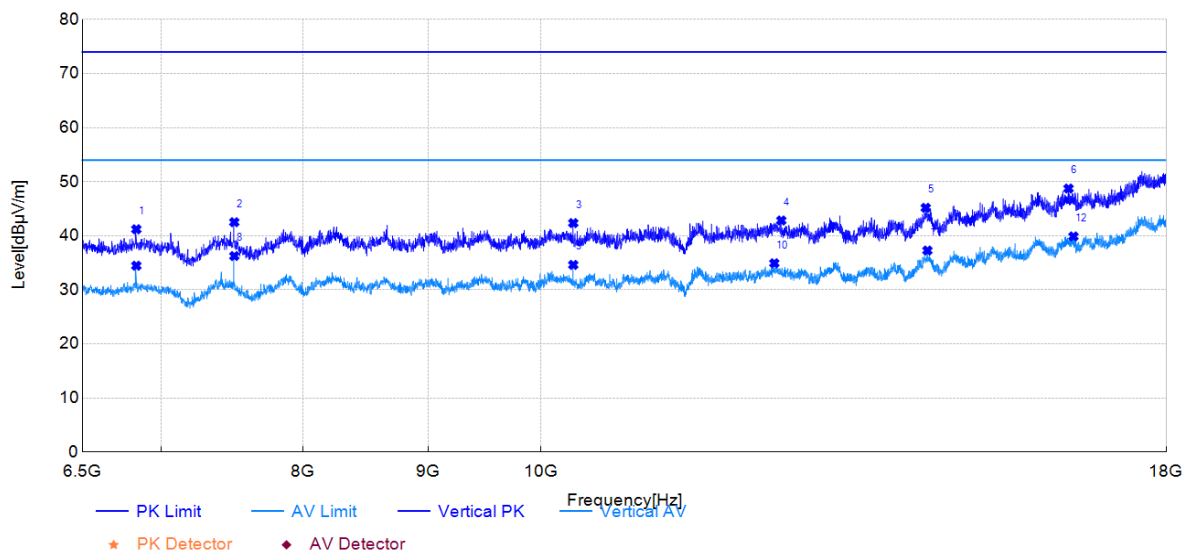


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6839.25	45.85	41.21	-4.64	74.00	32.79	150	289	PK	Vertical	PASS
2	7499.06	45.44	42.52	-2.92	74.00	31.48	150	282	PK	Vertical	PASS
3	10312.25	42.22	42.36	0.14	74.00	31.64	150	282	PK	Vertical	PASS
4	12538.94	40.13	42.84	2.71	74.00	31.16	150	216	PK	Vertical	PASS
5	14361.69	39.84	45.18	5.34	74.00	28.82	150	237	PK	Vertical	PASS
6	16424.50	39.00	48.75	9.75	74.00	25.25	150	187	PK	Vertical	PASS
7	6839.25	39.11	34.47	-4.64	54.00	19.53	150	164	AV	Vertical	PASS
8	7499.06	39.18	36.26	-2.92	54.00	17.74	150	282	AV	Vertical	PASS
9	10312.25	34.48	34.62	0.14	54.00	19.38	150	282	AV	Vertical	PASS
10	12457.00	32.17	34.93	2.76	54.00	19.07	150	325	AV	Vertical	PASS
11	14384.69	31.86	37.28	5.42	54.00	16.72	150	32	AV	Vertical	PASS
12	16500.69	30.36	39.89	9.53	54.00	14.11	150	91	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11a-CDD	Test Date:	2026-06-03
Test Channel:	5745MHz	Test Engineer:	Jawb Cai

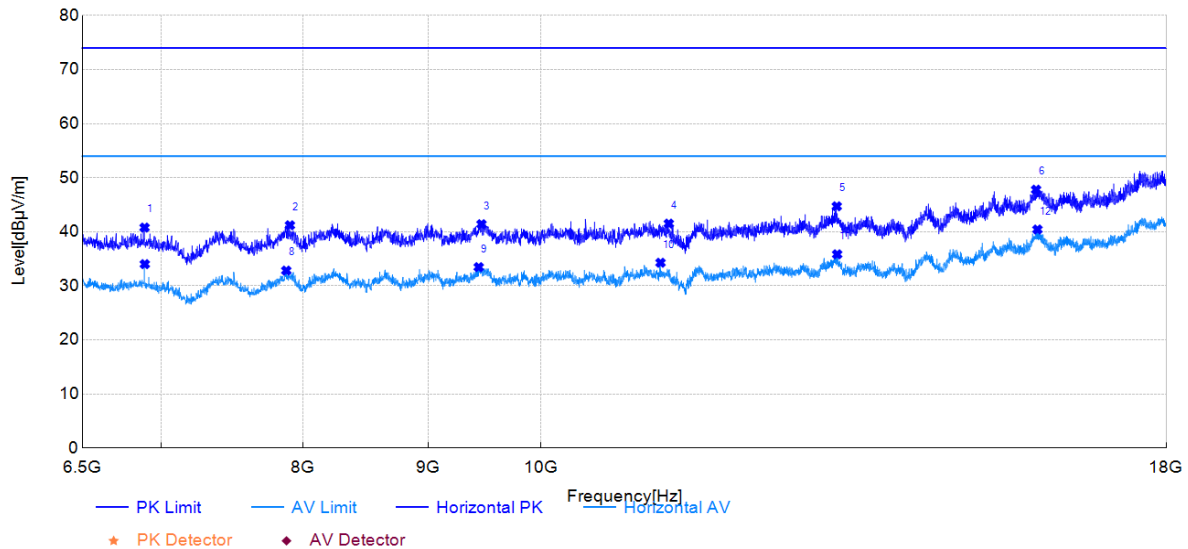

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6892.44	45.41	40.79	-4.62	74.00	33.21	150	284	PK	Horizontal	PASS
2	7901.56	42.30	41.21	-1.09	74.00	32.79	150	284	PK	Horizontal	PASS
3	9459.81	41.39	41.41	0.02	74.00	32.59	150	211	PK	Horizontal	PASS
4	11281.13	40.43	41.52	1.09	74.00	32.48	150	120	PK	Horizontal	PASS
5	13210.25	41.32	44.72	3.40	74.00	29.28	150	0	PK	Horizontal	PASS
6	15931.44	38.17	47.79	9.62	74.00	26.21	150	306	PK	Horizontal	PASS
7	6893.88	38.63	34.02	-4.61	54.00	19.98	150	291	AV	Horizontal	PASS
8	7874.25	34.44	32.83	-1.61	54.00	21.17	150	239	AV	Horizontal	PASS
9	9435.38	33.64	33.47	-0.17	54.00	20.53	150	47	AV	Horizontal	PASS
10	11193.44	33.26	34.28	1.02	54.00	19.72	150	129	AV	Horizontal	PASS
11	13214.56	32.48	35.84	3.36	54.00	18.16	150	349	AV	Horizontal	PASS
12	15951.56	30.82	40.43	9.61	54.00	13.57	150	159	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

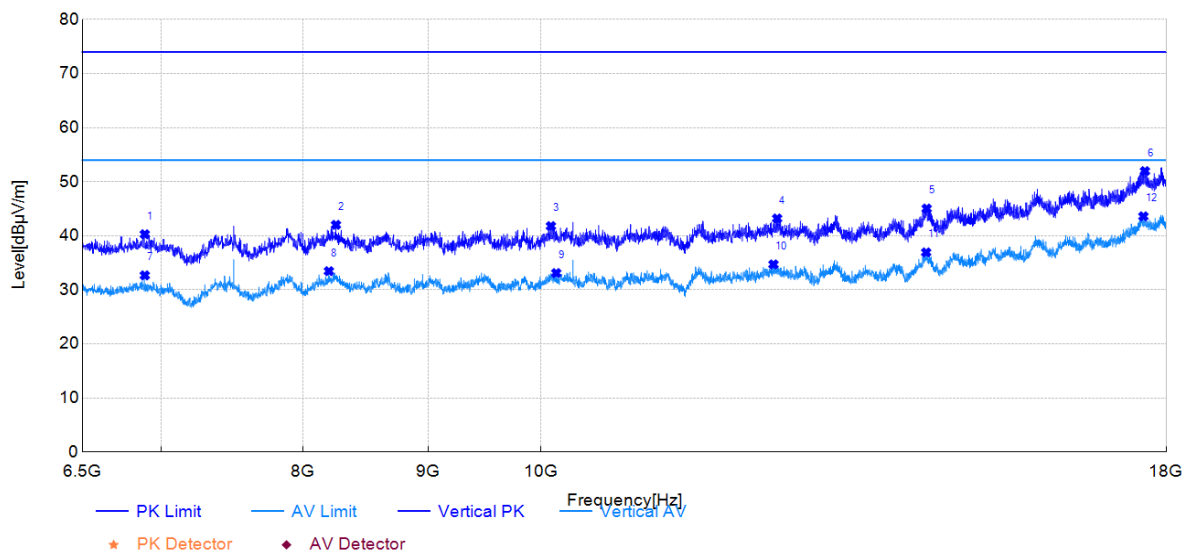


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6893.88	44.63	40.29	-4.34	74.00	33.71	150	150	PK	Vertical	PASS
2	8250.88	43.44	42.03	-1.41	74.00	31.97	150	259	PK	Vertical	PASS
3	10098.06	41.69	41.80	0.11	74.00	32.20	150	259	PK	Vertical	PASS
4	12490.06	40.38	43.21	2.83	74.00	30.79	150	259	PK	Vertical	PASS
5	14374.63	39.65	45.04	5.39	74.00	28.96	150	223	PK	Vertical	PASS
6	17647.81	37.57	51.96	14.39	74.00	22.04	150	326	PK	Vertical	PASS
7	6893.88	37.02	32.68	-4.34	54.00	21.32	150	142	AV	Vertical	PASS
8	8196.25	35.03	33.46	-1.57	54.00	20.54	150	0	AV	Vertical	PASS
9	10148.38	33.02	33.11	0.09	54.00	20.89	150	106	AV	Vertical	PASS
10	12446.94	31.96	34.71	2.75	54.00	19.29	150	25	AV	Vertical	PASS
11	14367.44	31.57	36.93	5.36	54.00	17.07	150	282	AV	Vertical	PASS
12	17621.94	29.05	43.60	14.55	54.00	10.40	150	98	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11a-CDD	Test Date:	2026-06-03
Test Channel:	5785MHz	Test Engineer:	Jawb Cai

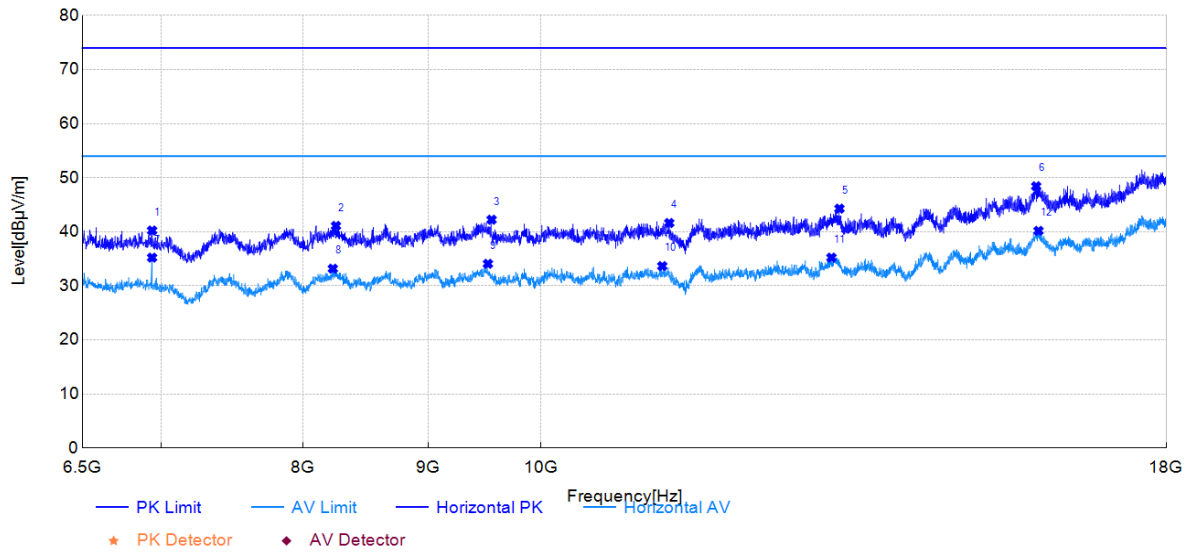

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6941.31	45.06	40.24	-4.82	74.00	33.76	150	291	PK	Horizontal	PASS
2	8250.88	42.56	41.10	-1.46	74.00	32.90	150	0	PK	Horizontal	PASS
3	9550.38	42.03	42.24	0.21	74.00	31.76	150	20	PK	Horizontal	PASS
4	11285.44	40.54	41.63	1.09	74.00	32.37	150	1	PK	Horizontal	PASS
5	13243.31	41.19	44.29	3.10	74.00	29.71	150	0	PK	Horizontal	PASS
6	15932.88	38.81	48.43	9.62	74.00	25.57	150	50	PK	Horizontal	PASS
7	6941.31	40.04	35.22	-4.82	54.00	18.78	150	291	AV	Horizontal	PASS
8	8226.44	34.72	33.18	-1.54	54.00	20.82	150	0	AV	Horizontal	PASS
9	9517.31	33.79	34.09	0.30	54.00	19.91	150	175	AV	Horizontal	PASS
10	11212.13	32.63	33.66	1.03	54.00	20.34	150	284	AV	Horizontal	PASS
11	13144.13	32.01	35.23	3.22	54.00	18.77	150	145	AV	Horizontal	PASS
12	15967.38	30.59	40.18	9.59	54.00	13.82	150	0	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

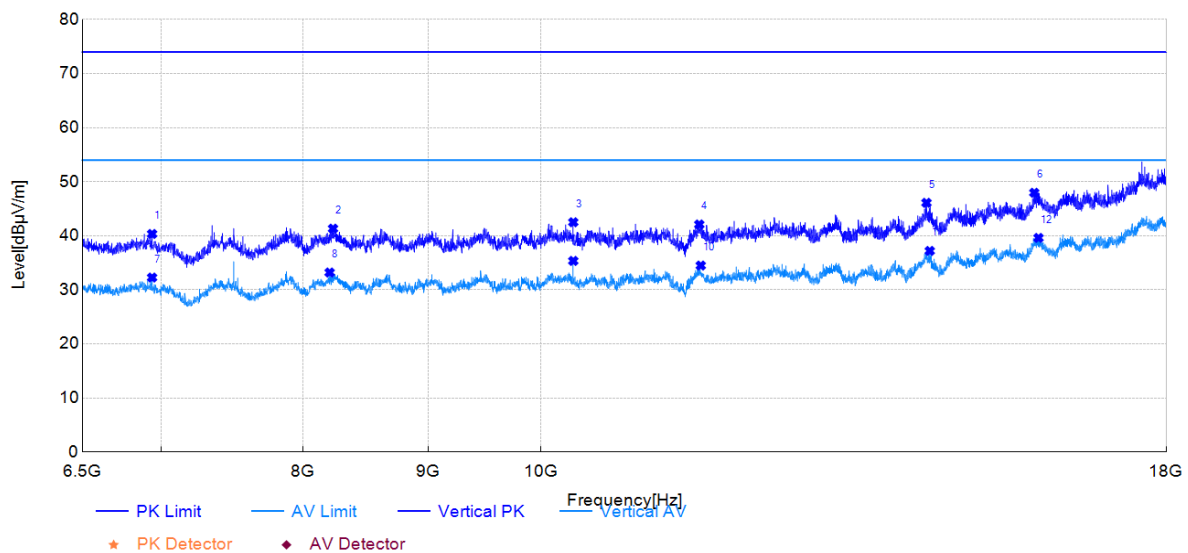


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6941.31	44.84	40.35	-4.49	74.00	33.65	150	46	PK	Vertical	PASS
2	8227.88	42.82	41.33	-1.49	74.00	32.67	150	25	PK	Vertical	PASS
3	10312.25	42.37	42.51	0.14	74.00	31.49	150	280	PK	Vertical	PASS
4	11608.88	40.17	42.10	1.93	74.00	31.90	150	266	PK	Vertical	PASS
5	14371.75	40.74	46.11	5.37	74.00	27.89	150	252	PK	Vertical	PASS
6	15904.13	38.86	47.97	9.11	74.00	26.03	150	359	PK	Vertical	PASS
7	6941.31	36.77	32.28	-4.49	54.00	21.72	150	324	AV	Vertical	PASS
8	8202.00	34.79	33.21	-1.58	54.00	20.79	150	98	AV	Vertical	PASS
9	10312.25	35.22	35.36	0.14	54.00	18.64	150	280	AV	Vertical	PASS
10	11624.69	32.74	34.50	1.76	54.00	19.50	150	331	AV	Vertical	PASS
11	14416.31	31.89	37.21	5.32	54.00	16.79	150	287	AV	Vertical	PASS
12	15967.38	30.60	39.62	9.02	54.00	14.38	150	142	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11a-CDD	Test Date:	2026-06-03
Test Channel:	5825MHz	Test Engineer:	Jawb Cai

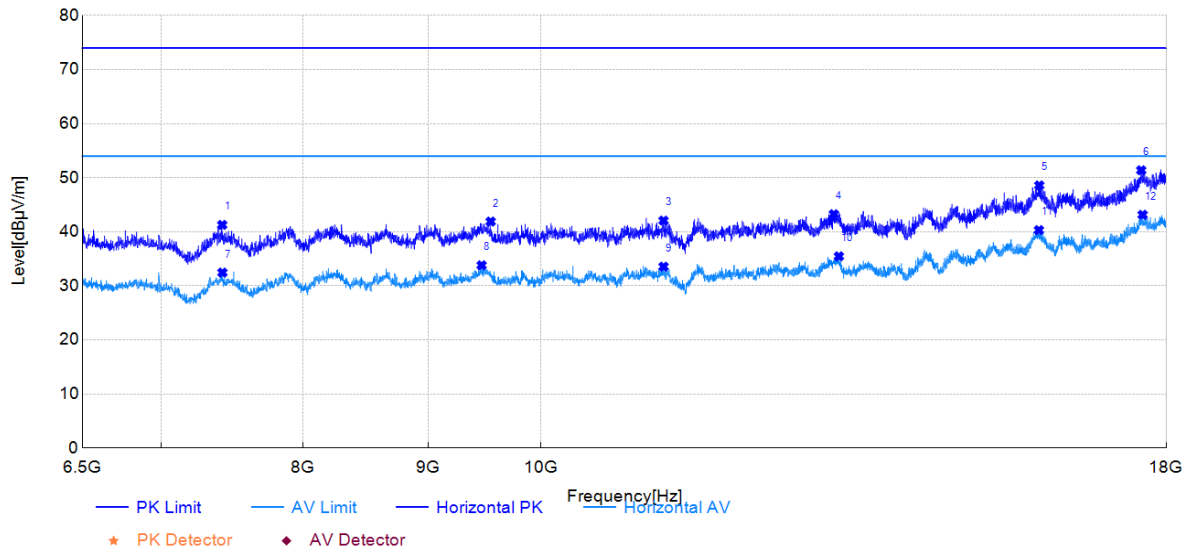

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7414.25	43.93	41.28	-2.65	74.00	32.72	150	360	PK	Horizontal	PASS
2	9541.75	41.67	41.90	0.23	74.00	32.10	150	254	PK	Horizontal	PASS
3	11225.06	41.04	42.08	1.04	74.00	31.92	150	203	PK	Horizontal	PASS
4	13172.88	39.90	43.26	3.36	74.00	30.74	150	0	PK	Horizontal	PASS
5	15978.88	39.00	48.59	9.59	74.00	25.41	150	159	PK	Horizontal	PASS
6	17586.00	37.44	51.39	13.95	74.00	22.61	150	92	PK	Horizontal	PASS
7	7415.69	35.12	32.46	-2.66	54.00	21.54	150	246	AV	Horizontal	PASS
8	9461.25	33.77	33.81	0.04	54.00	20.19	150	326	AV	Horizontal	PASS
9	11225.06	32.52	33.56	1.04	54.00	20.44	150	203	AV	Horizontal	PASS
10	13236.13	32.29	35.46	3.17	54.00	18.54	150	1	AV	Horizontal	PASS
11	15973.13	30.72	40.32	9.60	54.00	13.68	150	225	AV	Horizontal	PASS
12	17609.00	29.12	43.15	14.03	54.00	10.85	150	1	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

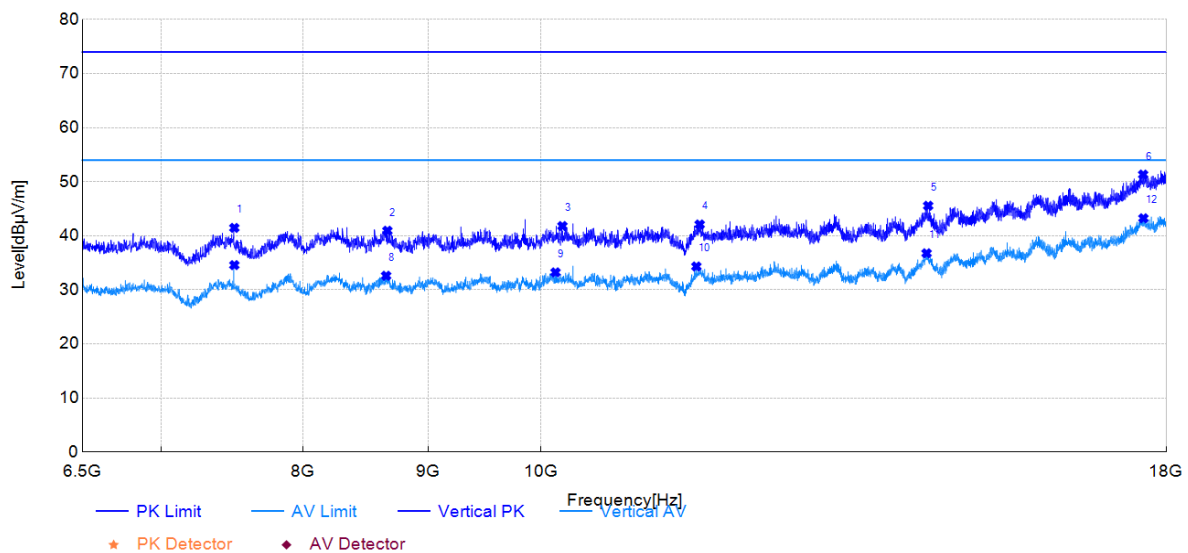


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7499.06	44.39	41.47	-2.92	74.00	32.53	150	281	PK	Vertical	PASS
2	8659.13	42.22	40.94	-1.28	74.00	33.06	150	360	PK	Vertical	PASS
3	10207.31	41.74	41.81	0.07	74.00	32.19	150	303	PK	Vertical	PASS
4	11613.19	40.22	42.10	1.88	74.00	31.90	150	355	PK	Vertical	PASS
5	14394.75	40.11	45.56	5.45	74.00	28.44	150	178	PK	Vertical	PASS
6	17617.63	36.76	51.33	14.57	74.00	22.67	150	359	PK	Vertical	PASS
7	7499.06	37.50	34.58	-2.92	54.00	19.42	150	281	AV	Vertical	PASS
8	8649.06	33.90	32.61	-1.29	54.00	21.39	150	288	AV	Vertical	PASS
9	10141.19	33.15	33.24	0.09	54.00	20.76	150	360	AV	Vertical	PASS
10	11577.25	32.77	34.33	1.56	54.00	19.67	150	76	AV	Vertical	PASS
11	14373.19	31.39	36.77	5.38	54.00	17.23	150	33	AV	Vertical	PASS
12	17621.94	28.70	43.25	14.55	54.00	10.75	150	360	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11be-EHT160	Test Date:	2026-06-03
Test Channel:	5250MHz	Test Engineer:	Jawb Cai

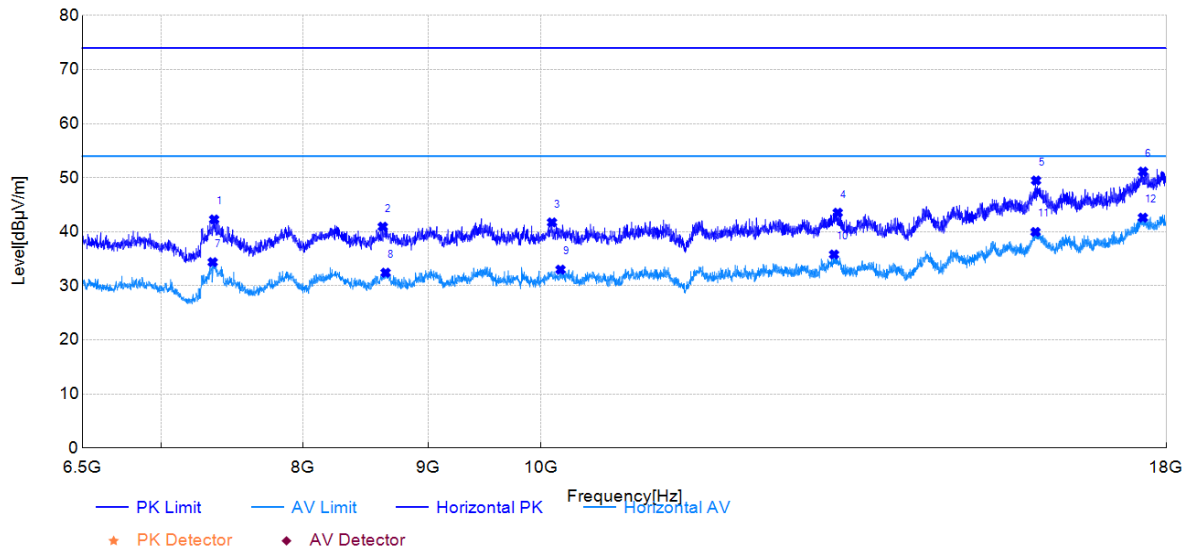

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7358.19	45.27	42.29	-2.98	74.00	31.71	150	47	PK	Horizontal	PASS
2	8621.75	42.21	40.94	-1.27	74.00	33.06	150	128	PK	Horizontal	PASS
3	10108.13	41.70	41.74	0.04	74.00	32.26	150	261	PK	Horizontal	PASS
4	13221.75	40.23	43.53	3.30	74.00	30.47	150	173	PK	Horizontal	PASS
5	15931.44	39.87	49.49	9.62	74.00	24.51	150	194	PK	Horizontal	PASS
6	17616.19	37.14	51.13	13.99	74.00	22.87	150	187	PK	Horizontal	PASS
7	7348.13	37.44	34.38	-3.06	54.00	19.62	150	298	AV	Horizontal	PASS
8	8644.75	33.67	32.44	-1.23	54.00	21.56	150	360	AV	Horizontal	PASS
9	10188.63	33.04	33.00	-0.04	54.00	21.00	150	239	AV	Horizontal	PASS
10	13175.75	32.43	35.80	3.37	54.00	18.20	150	7	AV	Horizontal	PASS
11	15922.81	30.34	39.97	9.63	54.00	14.03	150	187	AV	Horizontal	PASS
12	17613.31	28.62	42.62	14.00	54.00	11.38	150	142	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

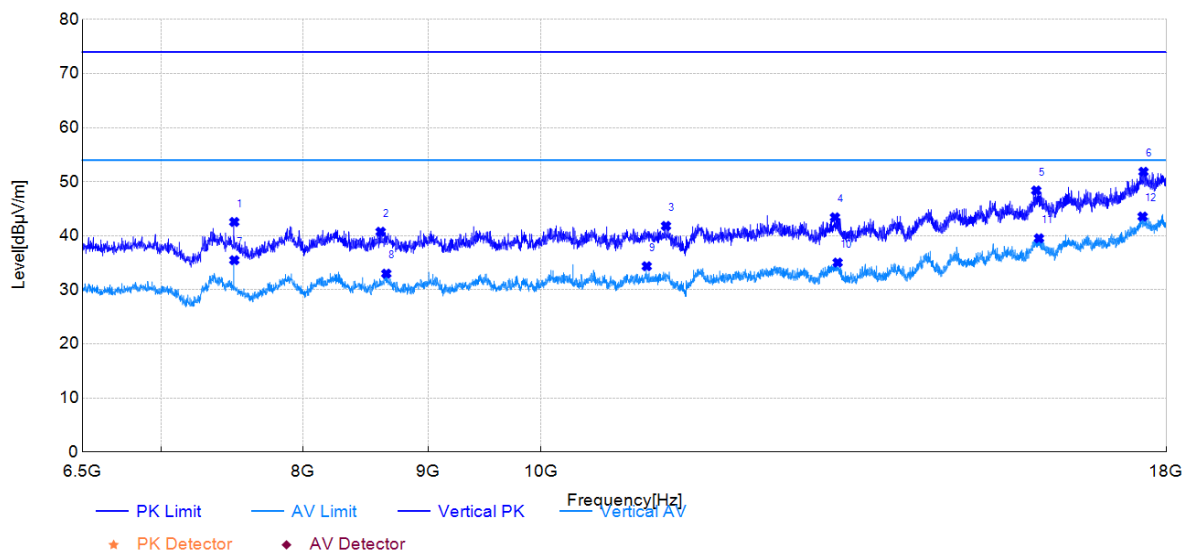


Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7499.06	45.48	42.56	-2.92	74.00	31.44	150	274	PK	Vertical	PASS
2	8604.50	42.09	40.75	-1.34	74.00	33.25	150	47	PK	Vertical	PASS
3	11250.94	40.71	41.83	1.12	74.00	32.17	150	360	PK	Vertical	PASS
4	13187.25	40.53	43.42	2.89	74.00	30.58	150	215	PK	Vertical	PASS
5	15934.31	39.31	48.38	9.07	74.00	25.62	150	360	PK	Vertical	PASS
6	17623.38	37.31	51.85	14.54	74.00	22.15	150	231	PK	Vertical	PASS
7	7499.06	38.41	35.49	-2.92	54.00	18.51	150	274	AV	Vertical	PASS
8	8650.50	34.29	33.00	-1.29	54.00	21.00	150	215	AV	Vertical	PASS
9	11049.69	33.32	34.37	1.05	54.00	19.63	150	69	AV	Vertical	PASS
10	13220.31	32.28	35.05	2.77	54.00	18.95	150	171	AV	Vertical	PASS
11	15974.56	30.52	39.54	9.02	54.00	14.46	150	24	AV	Vertical	PASS
12	17609.00	28.93	43.56	14.63	54.00	10.44	150	296	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level


Test Mode:	802.11be-EHT160	Test Date:	2026-06-03
Test Channel:	5570MHz	Test Engineer:	Jawb Cai

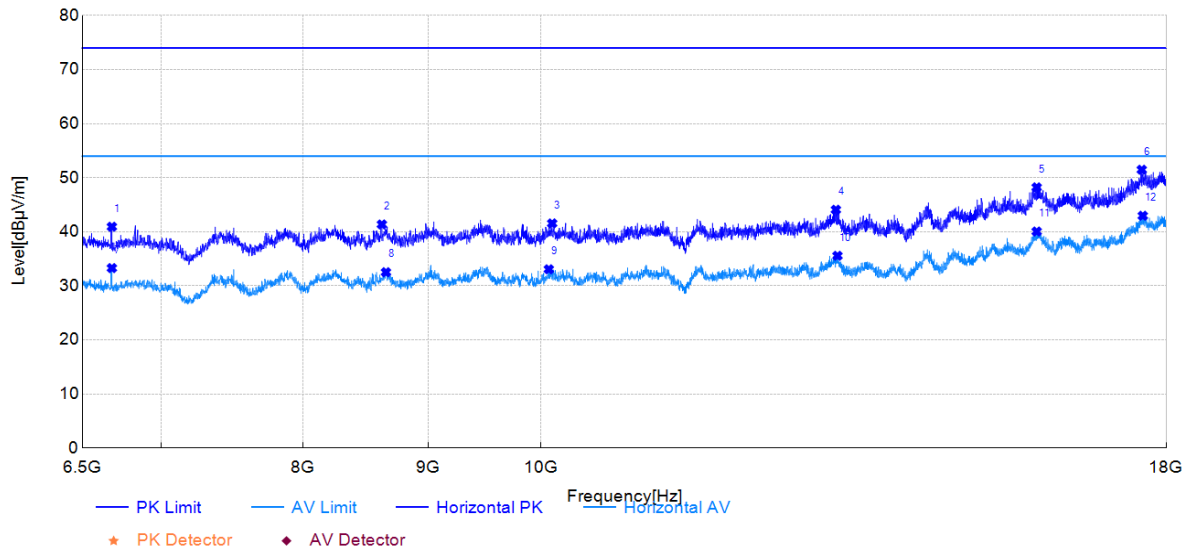

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	6684.00	46.71	40.94	-5.77	74.00	33.06	150	298	PK	Horizontal	PASS
2	8614.56	42.66	41.37	-1.29	74.00	32.63	150	92	PK	Horizontal	PASS
3	10109.56	41.52	41.56	0.04	74.00	32.44	150	99	PK	Horizontal	PASS
4	13198.75	40.61	44.09	3.48	74.00	29.91	150	305	PK	Horizontal	PASS
5	15940.06	38.61	48.23	9.62	74.00	25.77	150	123	PK	Horizontal	PASS
6	17594.63	37.46	51.49	14.03	74.00	22.51	150	360	PK	Horizontal	PASS
7	6684.00	39.06	33.29	-5.77	54.00	20.71	150	298	AV	Horizontal	PASS
8	8647.63	33.74	32.53	-1.21	54.00	21.47	150	5	AV	Horizontal	PASS
9	10077.94	32.99	33.07	0.08	54.00	20.93	150	92	AV	Horizontal	PASS
10	13218.88	32.25	35.57	3.32	54.00	18.43	150	360	AV	Horizontal	PASS
11	15940.06	30.44	40.06	9.62	54.00	13.94	150	283	AV	Horizontal	PASS
12	17611.88	28.96	42.97	14.01	54.00	11.03	150	239	AV	Horizontal	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

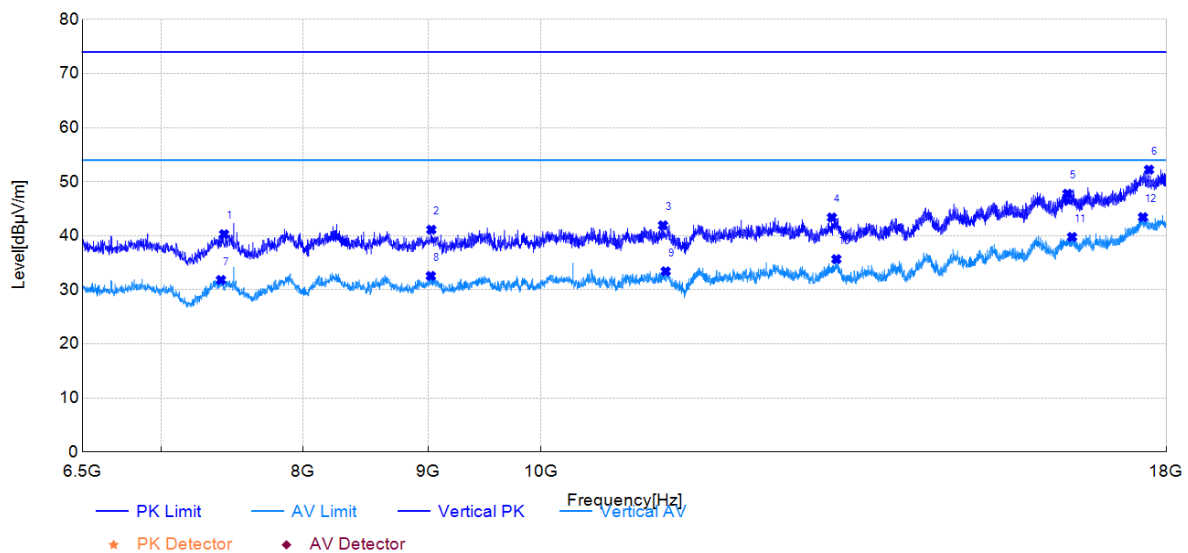

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	7427.19	43.00	40.30	-2.70	74.00	33.70	150	171	PK	Vertical	PASS
2	9024.25	42.21	41.13	-1.08	74.00	32.87	150	360	PK	Vertical	PASS
3	11219.31	40.89	41.94	1.05	74.00	32.06	150	157	PK	Vertical	PASS
4	13149.88	40.69	43.40	2.71	74.00	30.60	150	11	PK	Vertical	PASS
5	16408.69	37.99	47.78	9.79	74.00	26.22	150	360	PK	Vertical	PASS
6	17715.38	38.09	52.24	14.15	74.00	21.76	150	83	PK	Vertical	PASS
7	7405.63	34.48	31.83	-2.65	54.00	22.17	150	106	AV	Vertical	PASS
8	9019.94	33.66	32.58	-1.08	54.00	21.42	150	281	AV	Vertical	PASS
9	11248.06	32.32	33.43	1.11	54.00	20.57	150	340	AV	Vertical	PASS
10	13204.50	32.77	35.68	2.91	54.00	18.32	150	351	AV	Vertical	PASS
11	16479.13	30.20	39.79	9.59	54.00	14.21	150	157	AV	Vertical	PASS
12	17614.75	28.86	43.45	14.59	54.00	10.55	150	0	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

5955-7125MHz

Test Mode:	802.11be-EHT20	Test Date:	2026-06-03
Test Channel:	5955MHz	Test Engineer:	Jawb Cai

Horizontal:

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	60.92	37.75	-23.17	74.00	36.25	150	152	PK	Horizontal	PASS
2	2091.20	54.68	37.10	-17.58	74.00	36.90	150	14	PK	Horizontal	PASS
3	3750.00	51.56	40.89	-10.67	74.00	33.11	150	168	PK	Horizontal	PASS
4	7938.94	45.07	43.74	-1.33	74.00	30.26	150	261	PK	Horizontal	PASS
5	11600.25	40.38	42.04	1.66	74.00	31.96	150	56	PK	Horizontal	PASS
6	15951.56	38.04	47.65	9.61	74.00	26.35	150	350	PK	Horizontal	PASS
7	1249.70	57.84	34.67	-23.17	54.00	19.33	150	158	AV	Horizontal	PASS
8	2092.30	47.09	29.51	-17.58	54.00	24.49	150	14	AV	Horizontal	PASS
9	3750.00	46.81	36.14	-10.67	54.00	17.86	150	178	AV	Horizontal	PASS
10	7938.94	38.15	36.82	-1.33	54.00	17.18	150	261	AV	Horizontal	PASS
11	11611.75	31.89	33.43	1.54	54.00	20.57	150	129	AV	Horizontal	PASS
12	15967.38	30.02	39.61	9.59	54.00	14.39	150	77	AV	Horizontal	PASS

Vertical:

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	63.35	41.03	-22.32	74.00	32.97	150	162	PK	Vertical	PASS
2	3750.00	50.90	40.88	-10.02	74.00	33.12	150	239	PK	Vertical	PASS
3	4999.60	50.35	43.63	-6.72	74.00	30.37	150	193	PK	Vertical	PASS
4	7283.44	43.03	39.55	-3.48	74.00	34.45	150	216	PK	Vertical	PASS
5	10154.13	40.84	40.93	0.09	74.00	33.07	150	18	PK	Vertical	PASS
6	15915.63	38.19	47.29	9.10	74.00	26.71	150	360	PK	Vertical	PASS
7	1249.70	58.69	36.37	-22.32	54.00	17.63	150	162	AV	Vertical	PASS
8	3750.00	45.47	35.45	-10.02	54.00	18.55	150	55	AV	Vertical	PASS
9	4999.60	43.06	36.34	-6.72	54.00	17.66	150	213	AV	Vertical	PASS
10	7236.00	35.06	31.24	-3.82	54.00	22.76	150	340	AV	Vertical	PASS
11	10145.50	32.73	32.82	0.09	54.00	21.18	150	11	AV	Vertical	PASS
12	15964.50	30.50	39.53	9.03	54.00	14.47	150	142	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

Test Mode:	802.11be-EHT20	Test Date:	2026-06-03
Test Channel:	6415MHz	Test Engineer:	Jawb Cai

Horizontal:

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	61.51	38.34	-23.17	74.00	35.66	150	157	PK	Horizontal	PASS
2	2532.30	62.34	46.35	-15.99	74.00	27.65	150	60	PK	Horizontal	PASS
3	3750.00	51.97	41.30	-10.67	74.00	32.70	150	178	PK	Horizontal	PASS
4	7903.00	42.02	40.92	-1.10	74.00	33.08	150	89	PK	Horizontal	PASS
5	12127.81	40.12	41.66	1.54	74.00	32.34	150	352	PK	Horizontal	PASS
6	15873.94	38.43	47.59	9.16	74.00	26.41	150	223	PK	Horizontal	PASS
7	1249.70	57.30	34.13	-23.17	54.00	19.87	150	157	AV	Horizontal	PASS
8	2532.30	59.26	43.27	-15.99	54.00	10.73	150	60	AV	Horizontal	PASS
9	3750.00	47.28	36.61	-10.67	54.00	17.39	150	178	AV	Horizontal	PASS
10	7911.63	33.77	32.62	-1.15	54.00	21.38	150	360	AV	Horizontal	PASS
11	12048.75	32.23	33.73	1.50	54.00	20.27	150	319	AV	Horizontal	PASS
12	15892.63	29.74	39.25	9.51	54.00	14.75	150	304	AV	Horizontal	PASS

Vertical:

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	62.56	40.24	-22.32	74.00	33.76	150	156	PK	Vertical	PASS
2	2519.10	73.21	57.28	-15.93	74.00	16.72	150	223	PK	Vertical	PASS
3	4999.60	49.77	43.05	-6.72	74.00	30.95	150	197	PK	Vertical	PASS
4	7926.00	42.66	41.40	-1.26	74.00	32.60	150	0	PK	Vertical	PASS
5	11765.56	40.21	41.64	1.43	74.00	32.36	150	320	PK	Vertical	PASS
6	15967.38	37.77	46.79	9.02	74.00	27.21	150	327	PK	Vertical	PASS
7	1249.70	58.52	36.20	-22.32	54.00	17.80	150	166	AV	Vertical	PASS
8	2519.10	66.95	51.02	-15.93	54.00	2.98	150	223	AV	Vertical	PASS
9	4999.60	42.88	36.16	-6.72	54.00	17.84	150	197	AV	Vertical	PASS
10	7973.44	34.16	32.62	-1.54	54.00	21.38	150	166	AV	Vertical	PASS
11	11583.00	31.83	33.51	1.68	54.00	20.49	150	218	AV	Vertical	PASS
12	15888.31	29.24	38.16	8.92	54.00	15.84	150	349	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

Test Mode:	802.11be-EHT20	Test Date:	2026-06-03
Test Channel:	6535MHz	Test Engineer:	Jawb Cai

Horizontal:

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	63.37	40.20	-23.17	74.00	33.80	150	153	PK	Horizontal	PASS
2	2499.30	62.68	46.58	-16.10	74.00	27.42	150	111	PK	Horizontal	PASS
3	5000.70	49.42	43.30	-6.12	74.00	30.70	150	270	PK	Horizontal	PASS
4	8405.00	41.96	40.82	-1.14	74.00	33.18	150	268	PK	Horizontal	PASS
5	12951.25	39.66	42.05	2.39	74.00	31.95	150	10	PK	Horizontal	PASS
6	15931.25	37.55	47.17	9.62	74.00	26.83	150	224	PK	Horizontal	PASS
7	1249.70	59.15	35.98	-23.17	54.00	18.02	150	153	AV	Horizontal	PASS
8	2499.30	56.85	40.75	-16.10	54.00	13.25	150	111	AV	Horizontal	PASS
9	4999.60	40.93	34.81	-6.12	54.00	19.19	150	255	AV	Horizontal	PASS
10	8393.75	34.05	32.92	-1.13	54.00	21.08	150	108	AV	Horizontal	PASS
11	13046.25	31.31	34.28	2.97	54.00	19.72	150	142	AV	Horizontal	PASS
12	15930.00	30.20	39.82	9.62	54.00	14.18	150	108	AV	Horizontal	PASS

Vertical:

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	62.66	40.34	-22.32	74.00	33.66	150	156	PK	Vertical	PASS
2	3750.00	50.70	40.68	-10.02	74.00	33.32	150	233	PK	Vertical	PASS
3	5000.70	50.51	43.79	-6.72	74.00	30.21	150	187	PK	Vertical	PASS
4	8370.00	42.15	41.06	-1.09	74.00	32.94	150	218	PK	Vertical	PASS
5	12757.50	39.71	41.58	1.87	74.00	32.42	150	174	PK	Vertical	PASS
6	16000.00	37.90	46.88	8.98	74.00	27.12	150	106	PK	Vertical	PASS
7	1249.70	58.95	36.63	-22.32	54.00	17.37	150	156	AV	Vertical	PASS
8	3750.00	46.11	36.09	-10.02	54.00	17.91	150	233	AV	Vertical	PASS
9	4999.60	42.29	35.57	-6.72	54.00	18.43	150	207	AV	Vertical	PASS
10	8418.75	34.11	32.97	-1.14	54.00	21.03	150	353	AV	Vertical	PASS
11	12706.25	31.23	32.86	1.63	54.00	21.14	150	0	AV	Vertical	PASS
12	15863.75	30.40	38.88	8.48	54.00	15.12	150	256	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

Test Mode:	802.11be-EHT20	Test Date:	2026-06-03
Test Channel:	6875MHz	Test Engineer:	Jawb Cai

Horizontal:

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	63.17	40.00	-23.17	74.00	34.00	150	153	PK	Horizontal	PASS
2	3750.00	52.83	42.16	-10.67	74.00	31.84	150	173	PK	Horizontal	PASS
3	6313.00	47.33	43.15	-4.18	74.00	30.85	150	270	PK	Horizontal	PASS
4	9070.00	41.64	41.08	-0.56	74.00	32.92	150	312	PK	Horizontal	PASS
5	12210.00	40.04	41.74	1.70	74.00	32.26	150	273	PK	Horizontal	PASS
6	15963.75	38.29	47.89	9.60	74.00	26.11	150	180	PK	Horizontal	PASS
7	1249.70	59.19	36.02	-23.17	54.00	17.98	150	153	AV	Horizontal	PASS
8	3750.00	47.39	36.72	-10.67	54.00	17.28	150	183	AV	Horizontal	PASS
9	6313.00	40.64	36.46	-4.18	54.00	17.54	150	270	AV	Horizontal	PASS
10	9085.00	33.69	33.13	-0.56	54.00	20.87	150	345	AV	Horizontal	PASS
11	12312.50	31.86	33.47	1.61	54.00	20.53	150	283	AV	Horizontal	PASS
12	15883.75	29.63	38.97	9.34	54.00	15.03	150	46	AV	Horizontal	PASS

Vertical:

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	62.81	40.49	-22.32	74.00	33.51	150	155	PK	Vertical	PASS
2	2526.80	64.57	48.67	-15.90	74.00	25.33	150	211	PK	Vertical	PASS
3	4999.60	50.19	43.47	-6.72	74.00	30.53	150	197	PK	Vertical	PASS
4	9083.75	42.02	40.95	-1.07	74.00	33.05	150	358	PK	Vertical	PASS
5	12453.75	40.03	42.79	2.76	74.00	31.21	150	296	PK	Vertical	PASS
6	15923.75	37.76	46.85	9.09	74.00	27.15	150	296	PK	Vertical	PASS
7	1249.70	59.17	36.85	-22.32	54.00	17.15	150	151	AV	Vertical	PASS
8	2499.30	56.17	40.17	-16.00	54.00	13.83	150	124	AV	Vertical	PASS
9	4999.60	42.36	35.64	-6.72	54.00	18.36	150	197	AV	Vertical	PASS
10	9047.50	33.59	32.52	-1.07	54.00	21.48	150	154	AV	Vertical	PASS
11	12418.75	32.23	34.92	2.69	54.00	19.08	150	4	AV	Vertical	PASS
12	15923.75	29.65	38.74	9.09	54.00	15.26	150	296	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

Test Mode:	802.11be-EHT20	Test Date:	2026-06-03
Test Channel:	7115MHz	Test Engineer:	Jawb Cai

Horizontal:

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	62.91	39.74	-23.17	74.00	34.26	150	157	PK	Horizontal	PASS
2	2499.30	62.75	46.65	-16.10	74.00	27.35	150	112	PK	Horizontal	PASS
3	4999.60	49.51	43.39	-6.12	74.00	30.61	150	0	PK	Horizontal	PASS
4	9031.25	41.64	41.07	-0.57	74.00	32.93	150	102	PK	Horizontal	PASS
5	11242.50	40.52	41.58	1.06	74.00	32.42	150	351	PK	Horizontal	PASS
6	14330.00	38.73	43.50	4.77	74.00	30.50	150	92	PK	Horizontal	PASS
7	1249.70	59.32	36.15	-23.17	54.00	17.85	150	157	AV	Horizontal	PASS
8	2499.30	56.93	40.83	-16.10	54.00	13.17	150	112	AV	Horizontal	PASS
9	4999.60	40.60	34.48	-6.12	54.00	19.52	150	342	AV	Horizontal	PASS
10	9045.00	33.50	32.94	-0.56	54.00	21.06	150	287	AV	Horizontal	PASS
11	11287.50	31.92	33.02	1.10	54.00	20.98	150	302	AV	Horizontal	PASS
12	14406.25	30.44	35.46	5.02	54.00	18.54	150	19	AV	Horizontal	PASS

Vertical:

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	63.07	40.75	-	74.00	33.25	150	152	PK	Vertical	PASS
2	3750.00	51.59	41.57	-	74.00	32.43	150	250	PK	Vertical	PASS
3	5000.70	50.62	43.90	-6.72	74.00	30.10	150	193	PK	Vertical	PASS
4	9080.00	42.36	41.29	-1.07	74.00	32.71	150	251	PK	Vertical	PASS
5	11716.25	41.78	42.86	1.08	74.00	31.14	150	29	PK	Vertical	PASS
6	15926.25	37.97	47.05	9.08	74.00	26.95	150	178	PK	Vertical	PASS
7	1249.70	59.14	36.82	-	54.00	17.18	150	158	AV	Vertical	PASS
8	3750.00	45.80	35.78	-	54.00	18.22	150	234	AV	Vertical	PASS
9	4999.60	43.57	36.85	-6.72	54.00	17.15	150	197	AV	Vertical	PASS
10	9030.00	33.43	32.36	-1.07	54.00	21.64	150	121	AV	Vertical	PASS
11	11602.50	31.67	33.66	1.99	54.00	20.34	150	212	AV	Vertical	PASS
12	15873.75	30.00	38.66	8.66	54.00	15.34	150	339	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level

Test Mode:	802.11be-EHT160	Test Date:	2026-06-03
Test Channel:	6985MHz	Test Engineer:	Jawb Cai

Horizontal:

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1249.70	63.51	40.34	-23.17	74.00	33.66	150	158	PK	Horizontal	PASS
2	3750.00	52.16	41.49	-10.67	74.00	32.51	150	178	PK	Horizontal	PASS
3	6029.20	46.87	41.96	-4.91	74.00	32.04	150	280	PK	Horizontal	PASS
4	8510.00	42.94	41.27	-1.67	74.00	32.73	150	45	PK	Horizontal	PASS
5	12138.75	40.04	41.60	1.56	74.00	32.40	150	0	PK	Horizontal	PASS
6	17085.00	37.43	47.70	10.27	74.00	26.30	150	200	PK	Horizontal	PASS
7	1249.70	59.24	36.07	-23.17	54.00	17.93	150	158	AV	Horizontal	PASS
8	3750.00	47.24	36.57	-10.67	54.00	17.43	150	183	AV	Horizontal	PASS
9	6000.60	40.48	35.37	-5.11	54.00	18.63	150	331	AV	Horizontal	PASS
10	8575.00	34.02	32.60	-1.42	54.00	21.40	150	100	AV	Horizontal	PASS
11	12133.75	31.42	32.97	1.55	54.00	21.03	150	200	AV	Horizontal	PASS
12	17063.75	29.15	39.22	10.07	54.00	14.78	150	16	AV	Horizontal	PASS

Vertical:

Suspected Data List											
NO.	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Det	Pol	Verdict
1	1375.10	64.97	43.48	-21.49	74.00	30.52	150	152	PK	Vertical	PASS
2	2437.70	63.79	47.52	-16.27	74.00	26.48	150	64	PK	Vertical	PASS
3	4999.60	50.25	43.53	-6.72	74.00	30.47	150	274	PK	Vertical	PASS
4	8337.50	42.53	41.36	-1.17	74.00	32.64	150	82	PK	Vertical	PASS
5	12530.00	39.69	42.44	2.75	74.00	31.56	150	306	PK	Vertical	PASS
6	17612.50	36.11	50.72	14.61	74.00	23.28	150	111	PK	Vertical	PASS
7	1375.10	56.77	35.28	-21.49	54.00	18.72	150	152	AV	Vertical	PASS
8	2437.70	57.77	41.50	-16.27	54.00	12.50	150	105	AV	Vertical	PASS
9	4999.60	42.98	36.26	-6.72	54.00	17.74	150	198	AV	Vertical	PASS
10	8396.25	33.88	32.84	-1.04	54.00	21.16	150	77	AV	Vertical	PASS
11	12408.75	31.88	34.54	2.66	54.00	19.46	150	150	AV	Vertical	PASS
12	17632.50	28.55	43.03	14.48	54.00	10.97	150	48	AV	Vertical	PASS

Note:(1) Level=Reading+Factor

(2) Margin=Limit-Level