


FCC Test Report

FCC ID : MXF-WRTQ411BE
Equipment : Wi-Fi 7 Tri-Band Router
Model No. : WRTQ-411BE
Brand Name : Gemtek
Applicant : Gemtek Technology Co., Ltd.
Address : No. 15-1 Zhonghua Road, Hsinchu Industrial
Park, Hukou, Hsinchu, Taiwan, 30352.
Standard : 47 CFR FCC Part 15.407
Received Date : Jan. 30, 2026
Tested Date : Feb. 27 ~ Apr. 15, 2026

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:


Along Chen / Manager

Approved by:



Gary Chang / Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	10
1.3	Test Setup Chart	10
1.4	The Equipment List	11
1.5	Test Standards	12
1.6	Reference Guidance	12
1.7	Deviation from Test Standard and Measurement Procedure.....	12
1.8	Measurement Uncertainty	13
2	TEST CONFIGURATION.....	14
2.1	Testing Facility	14
2.2	The Worst Test Modes and Channel Details	15
3	TRANSMITTER TEST RESULTS	17
3.1	Emission Bandwidth	17
3.2	Conducted Output Power	18
3.3	Power Spectral Density	20
3.4	Unwanted Emissions.....	22
3.5	Frequency Stability.....	25
3.6	AC Power Line Conducted Emissions	26
4	TEST LABORATORY INFORMATION	27
Appendix A. Emission Bandwidth		
Appendix B. Conducted Output Power		
Appendix C. Power Spectral Density		
Appendix D. Unwanted Emissions		
Appendix E. Frequency Stability		
Appendix F. AC Power Line Conducted Emissions		

Release Record

Report No.	Version	Description	Issued Date
FR613001AN	Rev. 01	Initial issue	May 11, 2026

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.150MHz 53.85 (Margin -12.15dB) - QP	Pass
15.407(b) 15.209	Unwanted Emissions	[dBuV/m at 3m]: 11490.00MHz 53.89 (Margin -0.11dB) - AV	Pass
15.407(a)	Emission Bandwidth	Meet the requirement of limit	Pass
15.407(e)	6dB bandwidth	Meet the requirement of limit	Pass
15.407(a)	Conducted Output Power	Max Power [dBm]: Non-beamforming mode 5150~5250MHz: 25.75 5250~5350MHz: 23.89 5470~5725MHz: 23.88 5725~5850MHz: 29.40 Beamforming mode 5150~5250MHz: 22.73 5250~5350MHz: 20.82 5470~5725MHz: 21.12 5725~5850MHz: 26.99	Pass
15.407(a)	Power Spectral Density	Meet the requirement of limit	Pass
15.407(g)	Frequency Stability	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
5150-5250 5250-5350 5470-5725 5725-5850	a	5180-5240 5260-5320 5500-5700 5745-5825	36-48 [4] 52-64 [4] 100-140 [11] 149-165 [5]	4	6-54 Mbps
5150-5250 5250-5350 5470-5725 5725-5850	n (HT20) ac (VHT20) ax (HE20) be (EHT20)	5180-5240 5260-5320 5500-5700 5745-5825	36-48 [4] 52-64 [4] 100-140 [11] 149-165 [5]	4	MCS 0-31 MCS 0-9 MCS 0-11 MCS 0-13
5150-5250 5250-5350 5470-5725 5725-5850	n (HT40) ac (VHT40) ax (HE40) be (EHT40)	5190-5230 5270-5310 5510-5670 5755-5795	38-46 [2] 54-62 [2] 102-134 [5] 151-159 [2]	4	MCS 0-31 MCS 0-9 MCS 0-11 MCS 0-13
5150-5250 5250-5350 5470-5725 5725-5850	ac (VHT80) ax (HE80) be (EHT80)	5210 5290 5530-5610 5775	42 [1] 58 [1] 106-122 [2] 155 [1]	4	MCS 0-9 MCS 0-11 MCS 0-13
5150-5250 5250-5350 5470-5725	ac (VHT160) ax (HE160) be (EHT160)	5250 5570	50 [1] 114 [1]	4	MCS 0-11 MCS 0-11 MCS 0-13
Note 1: OFDM/OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM and 4096QAM modulation.					

1.1.2 Antenna Details

Ant. No.	Model	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)			
				5150~5250	5250~5350	5470~5725	5725~5850
1	5G_ANT1	Dipole	UFL	2.16	2.77	2.16	2.58
2	5G_ANT2	Dipole	UFL	2.22	2.84	2.97	2.05
3	5G_ANT3	Dipole	UFL	2.76	2.63	2.69	2.92
4	5G_ANT4	Dipole	UFL	2.19	2.53	2.71	2.22

1.1.3 Configuration of Equipment under Test (EUT)

Power Supply Type	12Vdc from adapter	
TPC	☒ Support	☐ Not support
Beamforming	☒ Support	☐ Not support
RU Configuration	☒ Full RU	☐ Partial RU
Channel Puncturing	☐ Support	☒ Not support

1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	AC adapter	Brand: MOSO Model: MS-V4000R120-050A0-US I/P: 100-240Vac, 50/60Hz, 1.3A max. O/P: 12V=4A, 48W Power Line: 1.5m non-shielded without core
2	AC adapter	Brand: LUCENT TRANS Model: 1A133-LHHH-F I/P: 100-240Vac, 50/60Hz, 1.4A max. O/P: 12V=4A, 48W Power Line: 1.5m non-shielded without core
3	RJ45 (RAPID CONN)	1.5m non-shielded without core
4	RJ45 (TUNGLI)	1.5m non-shielded without core

1.1.5 Channel List

802.11a / n HT20 / ac VHT20 / ax HE20 / be EHT20		802.11n HT40 / ac VHT40 / ax HE40 / be EHT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
36	5180	38	5190
40	5200	46	5230
44	5220	54	5270
48	5240	62	5310
52	5260	102	5510
56	5280	110	5550
60	5300	118	5590
64	5320	126	5630
100	5500	134	5670
104	5520	151	5755
108	5540	159	5795
112	5560	802.11ac VHT80 / ax HE80 / be EHT80	
116	5580	42	5210
120	5600	58	5290
124	5620	106	5530
128	5640	122	5610
132	5660	155	5775
136	5680	802.11ac VHT160 / ax HE160 / be EHT160	
140	5700	50	5250
149	5745	114	5570
153	5765	---	---
157	5785	---	---
161	5805	---	---
165	5825	---	---

1.1.6 Test Tool and Duty Cycle

Test Tool	QSPR x86, Version: 6.00.00234.1		
Duty Cycle and Duty Factor	Mode	Duty Cycle (%)	Duty Factor (dB)
	11a	99.16%	0.04
	be EHT20-OFDMA	81.56%	0.89
	be EHT40-OFDMA	71.12%	1.48
	be EHT80-OFDMA	54.86%	2.61
	be EHT160-OFDMA	50.36%	2.98

1.1.7 Power Index of Test Tool


Modulation Mode	Test Frequency (MHz)	Power Index
11a	5180	17.5
11a	5200	17.5
11a	5240	17.5
11a	5260	17.5
11a	5300	17.5
11a	5320	17.5
11a	5500	17.5
11a	5580	17.5
11a	5700	17.5
11a	5745	24
11a	5785	24
11a	5825	24.5
be EHT20-OFDMA	5180	16
be EHT20-OFDMA	5200	17.5
be EHT20-OFDMA	5240	17.5
be EHT20-OFDMA	5260	17
be EHT20-OFDMA	5300	17
be EHT20-OFDMA	5320	16.5
be EHT20-OFDMA	5500	16
be EHT20-OFDMA	5520	17
be EHT20-OFDMA	5580	17
be EHT20-OFDMA	5680	17
be EHT20-OFDMA	5700	14
be EHT20-OFDMA	5745	22.5
be EHT20-OFDMA	5785	22.5
be EHT20-OFDMA	5825	23.5

Modulation Mode	Test Frequency (MHz)	Power Index
be EHT40-OFDMA	5190	17
be EHT40-OFDMA	5230	19.5
be EHT40-OFDMA	5270	17.5
be EHT40-OFDMA	5310	16.5
be EHT40-OFDMA	5510	17
be EHT40-OFDMA	5590	17.5
be EHT40-OFDMA	5670	17
be EHT40-OFDMA	5755	23
be EHT40-OFDMA	5795	22.5
be EHT80-OFDMA	5210	16
be EHT80-OFDMA	5290	15.5
be EHT80-OFDMA	5530	16
be EHT80-OFDMA	5610	17.5
be EHT80-OFDMA	5775	22
be EHT160-OFDMA	5250	13.5
be EHT160-OFDMA	5570	14.5

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Laptop	DELL	Latitude 3440	DoC	---
2	Laptop	DELL	Latitude 3440	DoC	---
3	RJ45 Connector	ICC	RJ45 Connector	---	---

1.3 Test Setup Chart

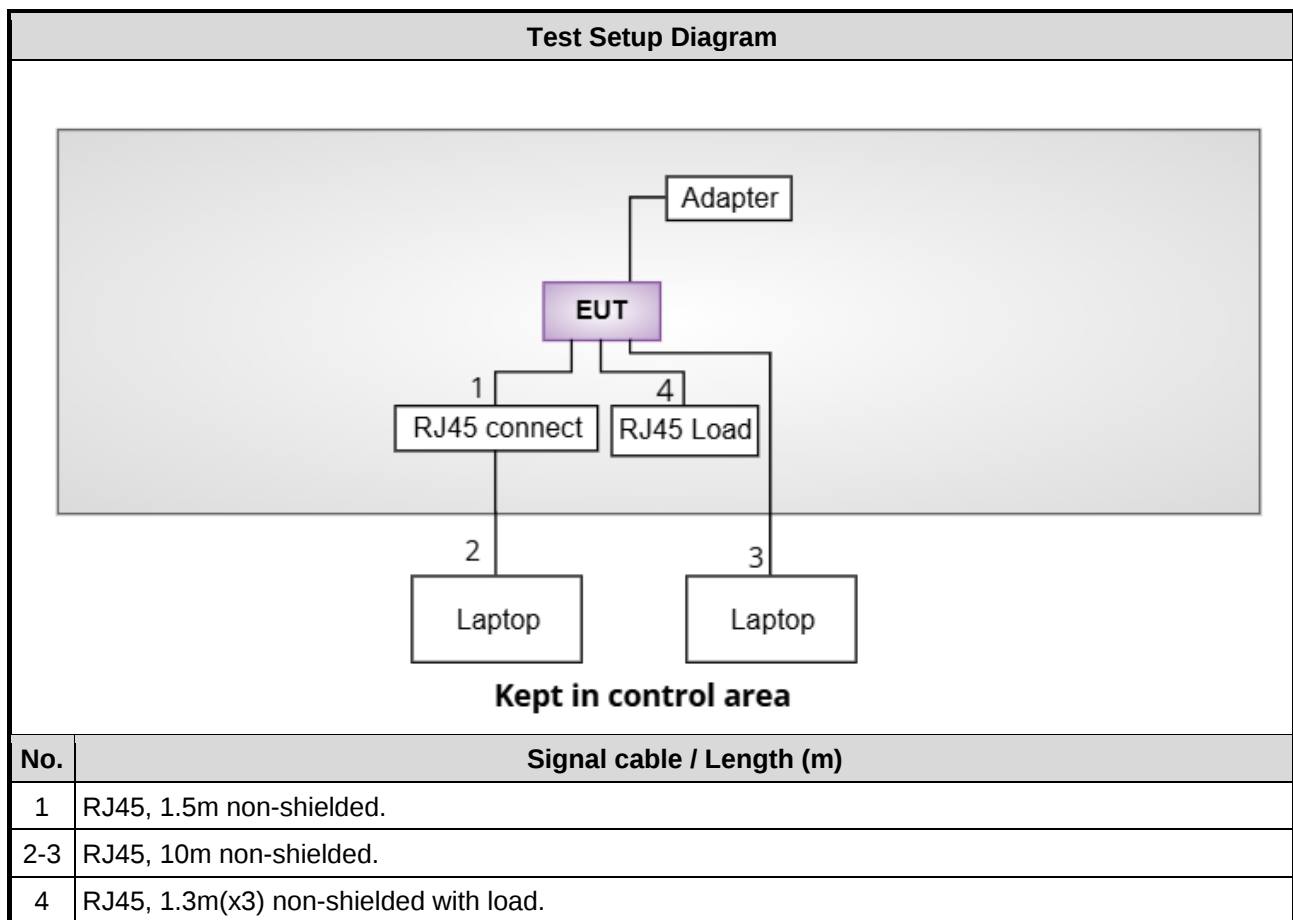

1.4 The Equipment List

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Feb. 27 ~ Apr. 15, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101659	Apr. 17, 2025	Apr. 16, 2026
Spectrum Analyzer	R&S	FSV40	101498	Nov. 06, 2025	Nov. 05, 2026
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 17, 2025	Nov. 16, 2026
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Jul. 04, 2025	Jul. 03, 2026
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 19, 2025	Dec. 18, 2026
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 28, 2025	Nov. 27, 2026
Preamplifier	EMC	EMC02325	980225	Jun. 13, 2025	Jun. 12, 2026
Preamplifier	EMC	EMC118A45SE	980898	Jun. 24, 2025	Jun. 23, 2026
Preamplifier	EMC	EMC184045SE	980903	Aug. 08, 2025	Aug. 07, 2026
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 01, 2025	Sep. 30, 2026
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 01, 2025	Sep. 30, 2026
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 01, 2025	Sep. 30, 2026
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 01, 2025	Sep. 30, 2026
RF Cable	EMC	EMC104-35M-35M- 8000	210920	Oct. 01, 2025	Sep. 30, 2026
RF Cable	EMC	EMC104-35M-35M- 3000	210922	Oct. 01, 2025	Sep. 30, 2026
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 01, 2025	Sep. 30, 2026
Attenuator	Pasternack	PE7005-10	10-1	Oct. 01, 2025	Sep. 30, 2026
HIGHPASS FILTER 7.5-18G	STI	STI15-9722	STI-HP7.5G-A	Oct. 01, 2025	Sep. 30, 2026
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Apr. 15, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101910	Apr. 18, 2025	Apr. 17, 2026
Power Meter	Anritsu	ML2495A	1241002	Nov. 21, 2025	Nov. 20, 2026
Power Sensor	Anritsu	MA2411B	1207366	Nov. 21, 2025	Nov. 20, 2026
Attenuator	Pasternack	PE7005-10	10-2	Oct. 03, 2025	Oct. 02, 2026
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Jun. 26, 2025	Jun. 25, 2026
AC POWER SOURCE	APC	AFC-500W	F312060012	Jan. 08, 2026	Jan. 07, 2027
Measurement Software	Sporton	SENSE-15407_NII	V5.11	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Apr. 10, 2026				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101659	Apr. 17, 2025	Apr. 16, 2026
LISN	R&S	ENV216	101579	May 07, 2025	May 06, 2026
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Jan. 13, 2026	Jan. 12, 2027
RF Cable-CON	EMC	EMCCFD300-BM-B M-6000	50821	Oct. 07, 2025	Oct. 06, 2026
50 ohm terminal	NA	50	01	Jun. 17, 2025	Jun. 16, 2026
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

47 CFR FCC Part 15.407
ANSI C63.10-2020 + Cor.1-2023
ANSI C63.4-2014 + C63.4a-2017

1.6 Reference Guidance

FCC KDB 412172 D01 Determining ERP and EIRP v01r01
FCC KDB 662911 D01 Multiple Transmitter Output v02r01
FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.130 Hz
Conducted power	± 0.808 dB
Frequency error	$\pm 1 \times 10^{-9}$
Power density	± 0.583 dB
Conducted emission	± 2.715 dB
AC conducted emission	± 2.92 dB
Unwanted Emission ≤ 1 GHz	± 3.41 dB
Unwanted Emission > 1 GHz	± 4.59 dB
Time	$\pm 0.1\%$
Temperature	± 0.4 °C

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, 03CH01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Non-beamforming mode

Frequency band 5150~5850 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions	11a	5745	6 Mbps	---
Unwanted Emissions ≤1GHz	11a	5745	6 Mbps	---
Frequency band 5150~5350 MHz / 5470~5725 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Unwanted Emissions >1GHz Conducted Output Power Emission Bandwidth Power Spectral Density	11a	5180 / 5200 / 5240 / 5260 / 5300 5320 / 5500 / 5580 / 5700	6 Mbps	---
	be EHT20-OFDMA	5180 / 5200 / 5240 / 5260 / 5300 5320 / 5500 / 5580 / 5700	MCS 0	
	be EHT40-OFDMA	5190 / 5230 / 5270 / 5310 / 5510 5590 / 5670	MCS 0	
	be EHT80-OFDMA	5210 / 5290 / 5530 / 5610	MCS 0	
	be EHT160-OFDMA	5250 / 5570	MCS 0	
Frequency Stability	Un-modulation	5300	---	---
Frequency band 5725-5850 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Unwanted Emissions >1GHz Conducted Output Power Emission Bandwidth 6dB bandwidth Power Spectral Density	11a	5745 / 5785 / 5825	6 Mbps	---
	be EHT20-OFDMA	5745 / 5785 / 5825	MCS 0	
	be EHT40-OFDMA	5755 / 5795	MCS 0	
	be EHT80-OFDMA	5775	MCS 0	
Frequency Stability	Un-modulation	5785	---	---

NOTE:

- Two RJ45 Cables (RAPID CONN and TUNGLI) had been covered during the pretest, and found that **TUNGLI RJ45 Cable** was the worst case and was selected for final test.
- Two adapters (MOSO and LUCENT TRANS) had been covered during the pretest, and found that **MOSO** adapter was the worst case of AC Power line conducted emission test item and **LUCENT TRANS** adapter was the worst case of Radiated Spurious emission test item.
- Beamforming mode is calculated not measured. The calculation method is conducted power of non-beamforming – (Directional gain - max gain of single antenna).

Beamforming mode

Frequency band 5150~5350 MHz / 5470~5725 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Conducted Output Power	be EHT20-OFDMA	5180 / 5200 / 5240 / 5260 / 5300 5320 / 5500 / 5580 / 5700	MCS 0	---
	be EHT40-OFDMA	5190 / 5230 / 5270 / 5310 / 5510 5590 / 5670	MCS 0	
	be EHT80-OFDMA	5210 / 5290 / 5530 / 5610	MCS 0	
	be EHT160-OFDMA	5250 / 5570	MCS 0	
Frequency band 5725-5850 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Conducted Output Power	be EHT20-OFDMA	5745 / 5785 / 5825	MCS 0	---
	be EHT40-OFDMA	5755 / 5795	MCS 0	
	be EHT80-OFDMA	5775	MCS 0	
NOTE:				
1. Beamforming mode is calculated not measured. The calculation method is conducted power of non-beamforming – (Directional gain - max gain of single antenna).				

3 Transmitter Test Results

3.1 Emission Bandwidth

3.1.1 Limit of Emission Bandwidth

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.1.2 Test Procedures

26dB Bandwidth

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW, Detector = Peak.
3. Trace mode = max hold.
4. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.


Occupied Bandwidth

1. Set RBW = 1 % to 5 % of the OBW.
2. Set VBW $\geq$ 3 RBW.
3. Sample detection and single sweep mode shall be used.
4. Use the 99 % power bandwidth function of the instrument.

6dB Bandwidth

1. Set RBW = 100kHz, VBW = 300kHz.
2. Detector = Peak, Trace mode = max hold.
3. Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.1.3 Test Setup



3.1.4 Test Results

Ambient Condition	25°C / 69%	Tested By	Roger Lu
-------------------	------------	-----------	----------

Refer to Appendix A.

3.2 Conducted Output Power

3.2.1 Limit of Conducted Output Power

Frequency band 5150-5250 MHz		
Operating Mode		Limit
☐	Outdoor access point	Conducted Power: 1 W The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm)
☒	Indoor access point	Conducted Power: 1 W
☐	Fixed point-to-point access points	Conducted Power: 1 W
☐	Client devices	Conducted Power: 250 mW

Frequency Band (MHz)		Limit
☒	5250 ~ 5350	Conducted Power: 250mW or 11dBm+10 log B
☒	5470 ~ 5725	Conducted Power: 250mW or 11dBm+10 log B
☒	5725 ~ 5850	Conducted Power: 1 W
Note: "B" is the 26dB emission bandwidth in MHz.		

3.2.2 Test Procedures


Method PM-G (Measurement using a gated RF average power meter)

Measurements is performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Spectrum analyzer

1. Set RBW = 1MHz, VBW = 3MHz, Sweep time = Auto, Detector = RMS.
2. Trace average at least 100 traces in power averaging mode.
3. Compute power by integrating the spectrum across the 26 dB EBW.
4. Add 10 log(1/X, X:duty cycle) if duty cycle is <98%.

3.2.3 Test Setup

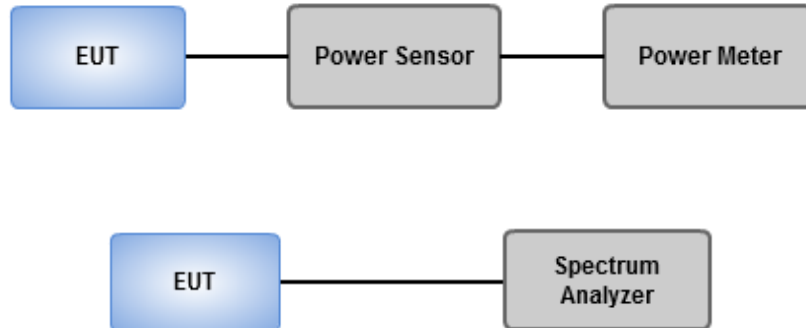

3.2.4 Test Results

Ambient Condition	25°C / 69%	Tested By	Roger Lu
-------------------	------------	-----------	----------

Refer to Appendix B.

3.3 Power Spectral Density

3.3.1 Limit of Power Spectral Density

Frequency band 5150-5250 MHz		
Operating Mode		Limit
☐	Outdoor access point	17 dBm / MHz
☒	Indoor access point	17 dBm / MHz
☐	Fixed point-to-point access points	17 dBm / MHz
☐	Client devices	11 dBm / MHz

Frequency Band (MHz)		Limit
☒	5250 ~ 5350	11 dBm / MHz
☒	5470 ~ 5725	11 dBm / MHz
☒	5725 ~ 5850	30 dBm / 500 kHz

3.3.2 Test Procedures

For 5150 ~ 5250 MHz / 5250 ~ 5350 MHz / 5470 ~ 5725 MHz

Duty cycle $\geq 98\%$

1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
2. Trace average 100 traces.
3. Use the peak marker function to determine the maximum amplitude level.

Duty cycle $< 98\%$

1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
2. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. Sweep time = auto
3. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter
4. Use the peak marker function to determine the maximum amplitude level.
5. Add $10 \log(1/x)$, where x is the duty cycle.

For 5725 ~ 5850 MHz


Duty cycle $\geq 98\%$

1. Set RBW = 500 kHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
2. Trace average 100 traces.
3. Use the peak marker function to determine the maximum amplitude level.

Duty cycle $< 98\%$

1. Set RBW = 500 kHz, VBW = 3 MHz, Detector = RMS.
2. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. Sweep time = auto
3. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter
4. Use the peak marker function to determine the maximum amplitude level.
5. Add $10 \log(1/x)$, where x is the duty cycle.

3.3.3 Test Setup



3.3.4 Test Results

Ambient Condition	25°C / 69%	Tested By	Roger Lu
-------------------	------------	-----------	----------

Refer to Appendix C.

3.4 Unwanted Emissions

3.4.1 Limit of Unwanted Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.850 GHz	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

3.4.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.4.3 Test Setup

Unwanted Emissions below 1 GHz

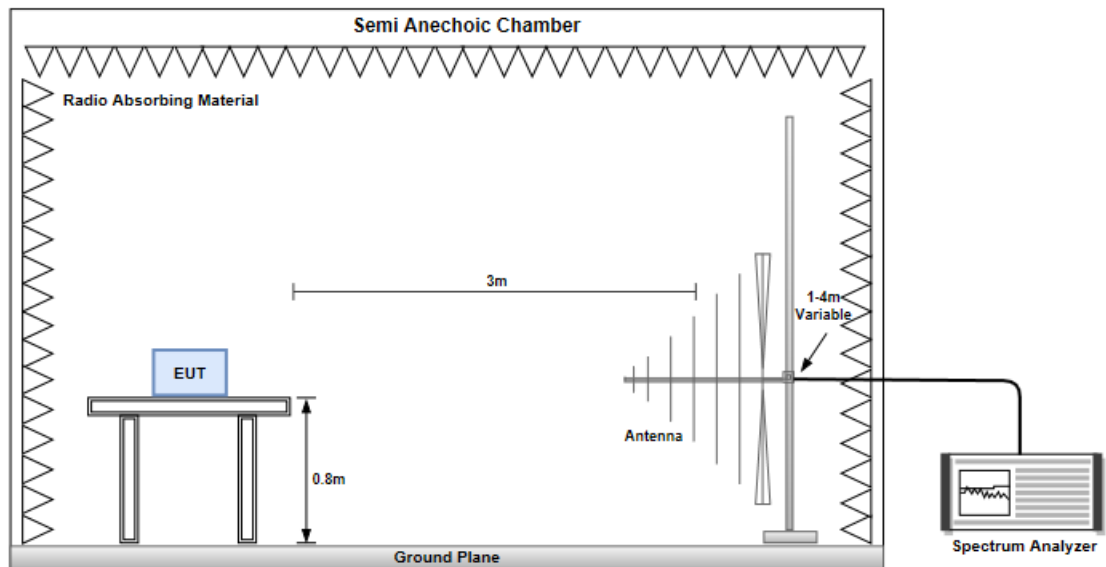

Unwanted Emissions above 1 GHz

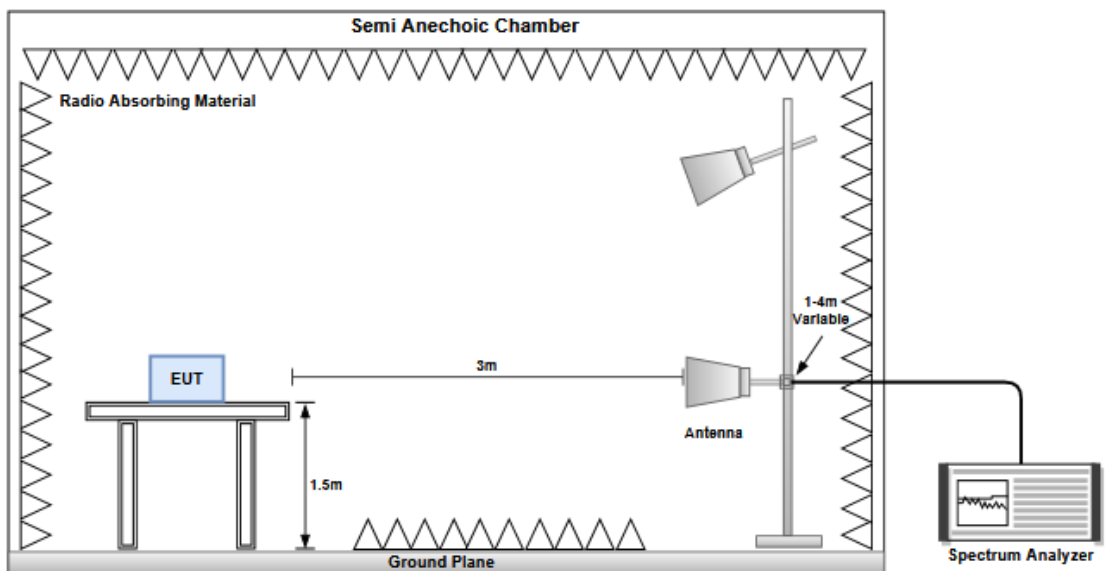

3.4.4 Test Results

Refer to Appendix D.

3.5 Frequency Stability


3.5.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.5.2 Test Procedures

1. The EUT is installed in an environment test chamber with external power source.
2. Set the chamber to operate at 20 centigrade and external power source to output at nominal voltage of EUT.
3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
4. When temperature is stabled, measure the frequency stability.
5. The test shall be performed under normal and extreme condition for temperature and voltage.

3.5.3 Test Setup

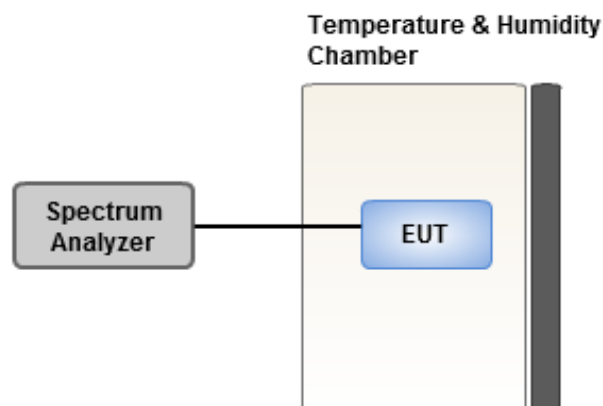

3.5.4 Test Results

Ambient Condition	25°C / 69%	Tested By	Roger Lu
-------------------	------------	-----------	----------

Refer to Appendix E.

3.6 AC Power Line Conducted Emissions

3.6.1 Limit of AC Power Line Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.6.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

3.6.3 Test Setup

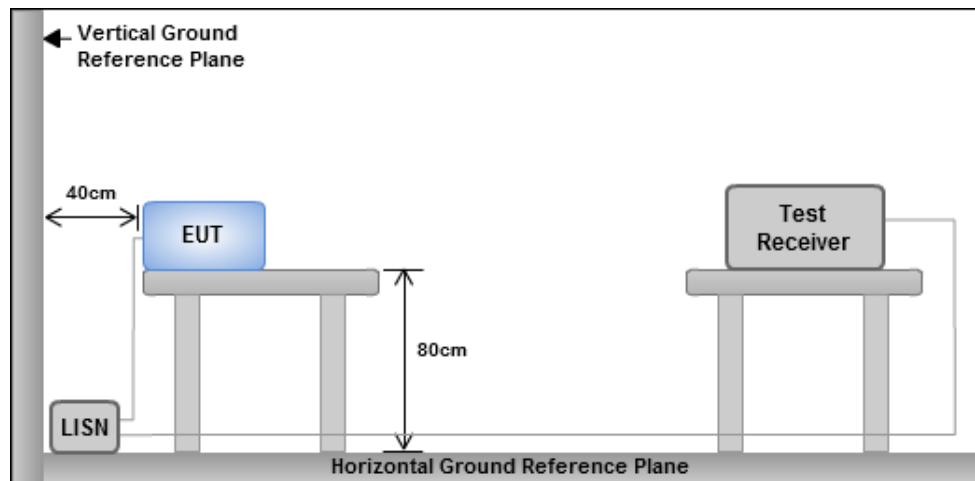

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.6.4 Test Results

Refer to Appendix F.

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <https://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Zhonghe

Tel: 886-2-2222-0288

1F, No. 6, Jiankang Road, Zhonghe
District, New Taipei City 235045,
Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC_Service@icertifi.com.tw

==END==

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	23.21M	17.031M	17M0D1D	22.275M	16.763M
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	24.75M	19.249M	19M2D1D	23.1M	19.084M
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	44.99M	38.102M	38M1D1D	43.45M	37.925M
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	90.42M	78.021M	78M0D1D	87.78M	77.897M
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	86.64M	78.082M	78M1D1D	85.12M	77.778M
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	22.825M	16.82M	16M8D1D	22.22M	16.761M
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	24.64M	19.183M	19M2D1D	23.485M	19.097M
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	44.77M	38.098M	38M1D1D	43.78M	38.001M
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	91.08M	78.043M	78M0D1D	89.54M	77.768M
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	87.76M	78.026M	78M0D1D	84.96M	77.809M
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	22.66M	16.88M	16M9D1D	22.275M	16.783M
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	24.365M	19.178M	19M2D1D	23.1M	19.085M
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	45.1M	38.07M	38M1D1D	43.34M	37.944M
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	90.42M	78.082M	78M1D1D	87.78M	77.792M
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	174.68M	157.612M	158MD1D	168.08M	157.149M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	16.335M	23.135M	23M1D1D	16.06M	16.792M
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	19.03M	20.37M	20M4D1D	18.755M	19.099M
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	38.17M	38.14M	38M1D1D	37.95M	37.989M
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	78.1M	78.126M	78M1D1D	76.56M	77.867M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	Inf	22.44M	16.839M	22.99M	16.902M	22.44M	16.85M	22.275M	16.763M
5200MHz	Pass	Inf	22.44M	16.832M	23.21M	17.031M	22.33M	16.875M	22.495M	16.77M
5240MHz	Pass	Inf	22.385M	16.79M	22.55M	16.87M	22.275M	16.77M	22.495M	16.8M
5260MHz	Pass	Inf	22.44M	16.787M	22.825M	16.82M	22.22M	16.761M	22.495M	16.806M
5300MHz	Pass	Inf	22.44M	16.792M	22.715M	16.794M	22.275M	16.765M	22.44M	16.815M
5320MHz	Pass	Inf	22.44M	16.794M	22.495M	16.773M	22.33M	16.768M	22.55M	16.81M
5500MHz	Pass	Inf	22.385M	16.81M	22.33M	16.783M	22.605M	16.806M	22.495M	16.8M
5580MHz	Pass	Inf	22.385M	16.828M	22.495M	16.88M	22.275M	16.789M	22.495M	16.792M
5700MHz	Pass	Inf	22.44M	16.798M	22.44M	16.793M	22.275M	16.793M	22.66M	16.812M
5745MHz	Pass	500k	16.335M	16.818M	16.335M	16.828M	16.335M	16.792M	16.335M	16.832M
5785MHz	Pass	500k	16.335M	16.913M	16.335M	17.025M	16.335M	17.101M	16.335M	16.978M
5825MHz	Pass	500k	16.06M	23.135M	16.335M	21.824M	16.335M	22.715M	16.335M	21.209M
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	Inf	23.485M	19.1M	23.76M	19.163M	23.21M	19.157M	23.1M	19.084M
5200MHz	Pass	Inf	24.75M	19.212M	24.255M	19.249M	24.64M	19.214M	24.475M	19.133M
5240MHz	Pass	Inf	24.695M	19.2M	23.32M	19.207M	24.145M	19.19M	24.365M	19.122M
5260MHz	Pass	Inf	24.365M	19.183M	24.2M	19.171M	24.64M	19.163M	24.255M	19.144M
5300MHz	Pass	Inf	24.42M	19.164M	24.42M	19.152M	24.53M	19.16M	24.2M	19.138M
5320MHz	Pass	Inf	24.255M	19.174M	23.485M	19.109M	23.595M	19.105M	23.485M	19.097M
5500MHz	Pass	Inf	24.31M	19.157M	23.815M	19.102M	23.54M	19.101M	24.09M	19.132M
5580MHz	Pass	Inf	24.365M	19.148M	23.375M	19.178M	23.595M	19.118M	24.2M	19.119M
5700MHz	Pass	Inf	23.32M	19.085M	23.155M	19.115M	23.1M	19.103M	23.155M	19.113M
5745MHz	Pass	500k	19.03M	19.124M	18.975M	19.145M	18.92M	19.099M	18.975M	19.132M
5785MHz	Pass	500k	18.975M	19.178M	18.975M	19.21M	18.975M	19.191M	18.975M	19.183M
5825MHz	Pass	500k	18.755M	19.573M	19.03M	19.444M	18.865M	20.37M	18.975M	19.981M
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	Inf	44.33M	38.019M	43.45M	37.925M	43.78M	38.004M	44.11M	38.102M
5230MHz	Pass	Inf	44.99M	38.075M	43.45M	37.954M	44.11M	37.967M	43.78M	38.049M
5270MHz	Pass	Inf	44.44M	38.059M	43.78M	38.017M	43.89M	38.013M	43.78M	38.001M
5310MHz	Pass	Inf	44.55M	38.044M	44.77M	38.039M	44M	38.036M	44.55M	38.098M
5510MHz	Pass	Inf	44.22M	38.024M	43.56M	38.047M	44M	38.04M	44M	38.022M
5590MHz	Pass	Inf	44.11M	38.017M	43.67M	37.944M	43.67M	37.999M	44.44M	38.038M
5670MHz	Pass	Inf	45.1M	38.07M	44.22M	38.062M	43.34M	38.025M	43.89M	38.006M
5755MHz	Pass	500k	37.95M	38.046M	37.95M	37.989M	37.95M	38.033M	38.17M	38.006M
5795MHz	Pass	500k	38.06M	38.14M	38.06M	38.091M	38.06M	38.079M	38.06M	38.05M
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	Inf	89.32M	78.021M	88.22M	77.897M	90.42M	77.942M	87.78M	77.948M
5290MHz	Pass	Inf	90.86M	78.043M	89.54M	77.854M	91.08M	77.976M	89.76M	77.768M
5530MHz	Pass	Inf	90.2M	77.982M	88.44M	77.895M	89.32M	77.932M	87.78M	77.792M
5610MHz	Pass	Inf	90.42M	78.082M	89.54M	77.845M	89.98M	77.951M	89.54M	77.887M
5775MHz	Pass	500k	78.1M	78.126M	77.88M	77.924M	76.56M	77.908M	77.22M	77.867M
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	86.56M	78.082M	85.2M	77.987M	85.12M	78.032M	86.64M	77.778M



Emission Bandwidth

Appendix A

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	87.76M	78.026M	85.92M	77.947M	84.96M	77.809M	85.52M	77.975M
5570MHz	Pass	Inf	174.68M	157.476M	173.8M	157.612M	168.08M	157.276M	171.16M	157.149M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band



Port X-OBW = Port X 99% occupied bandwidth



5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

EBW



5180MHz

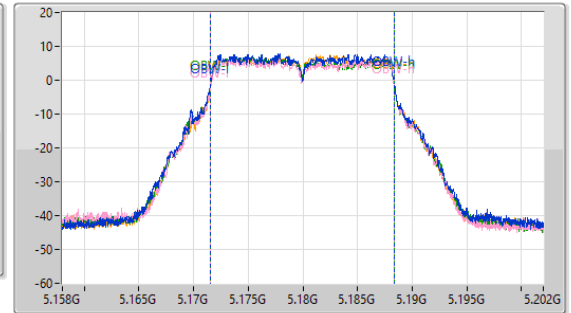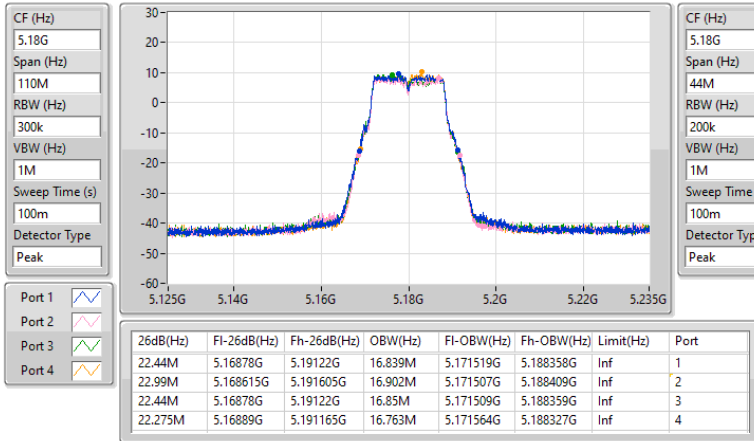

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5200MHz

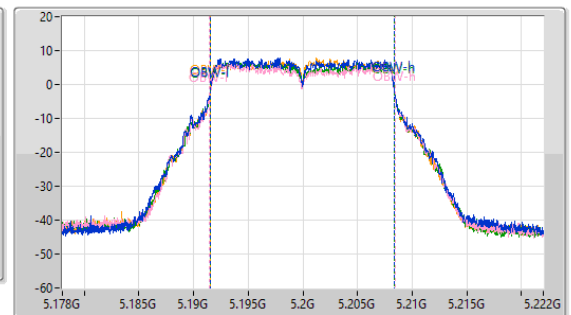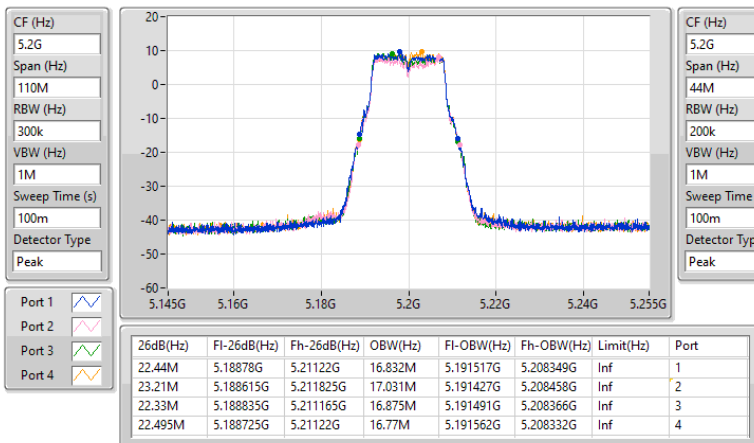




5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

EBW


5240MHz

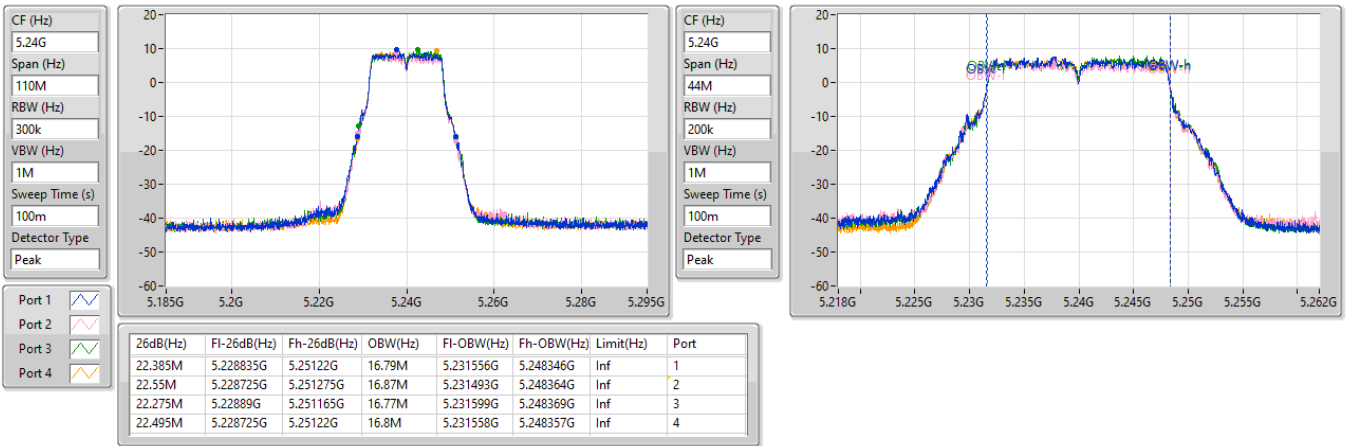

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5260MHz


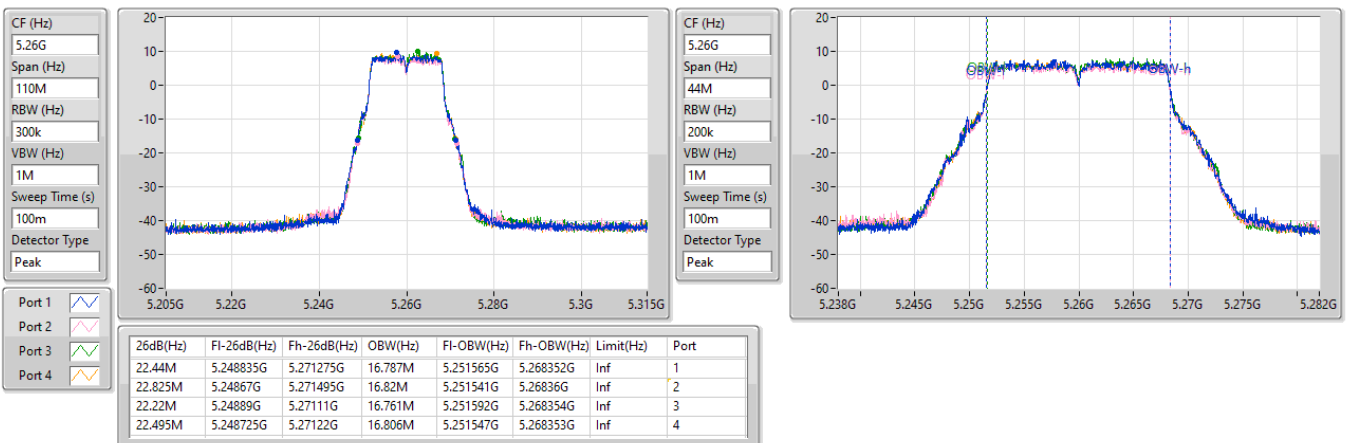




5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

EBW



5300MHz

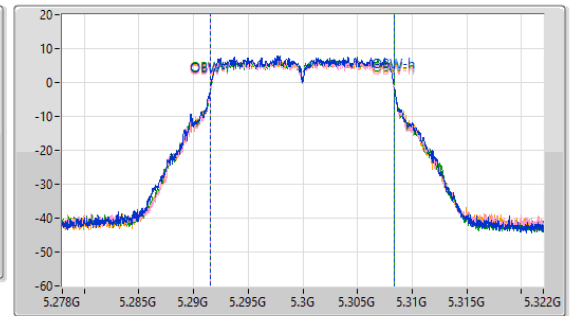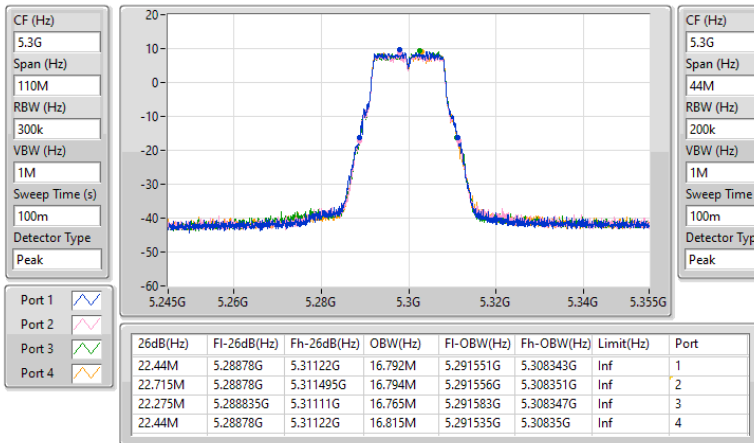

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5320MHz

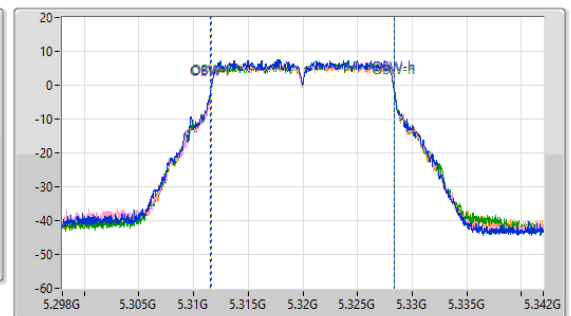
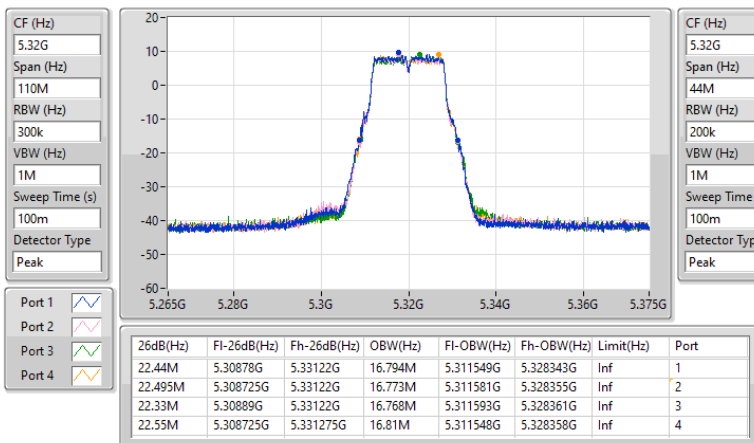




5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

EBW



5500MHz

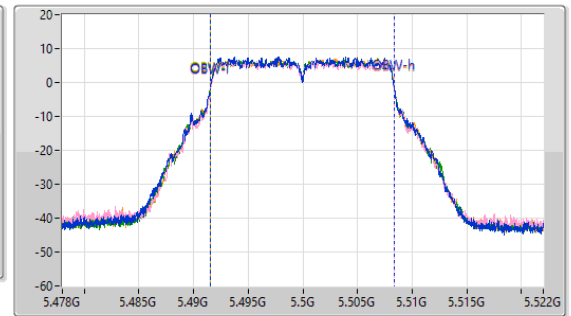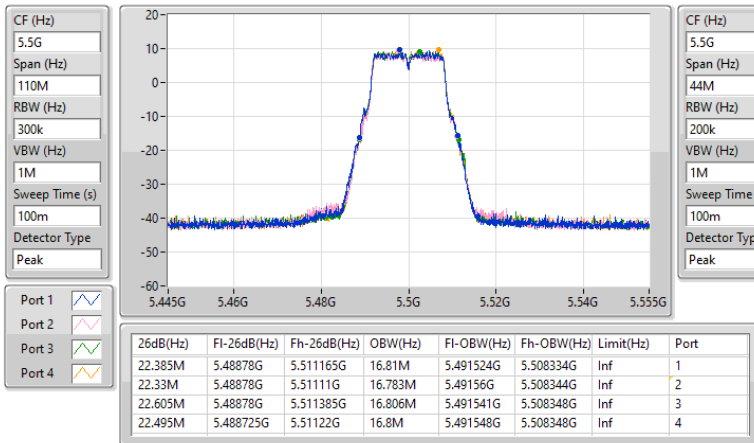

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5580MHz

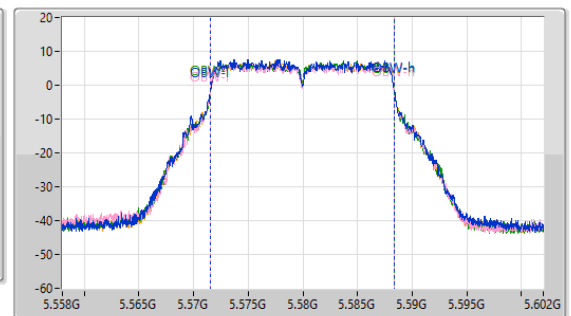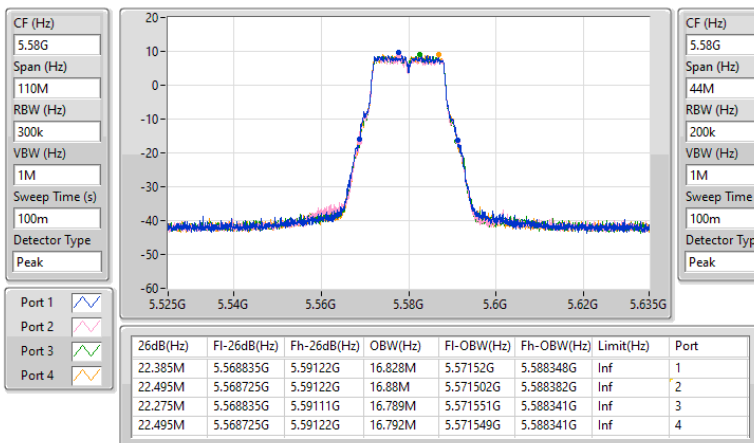




5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

EBW


5700MHz

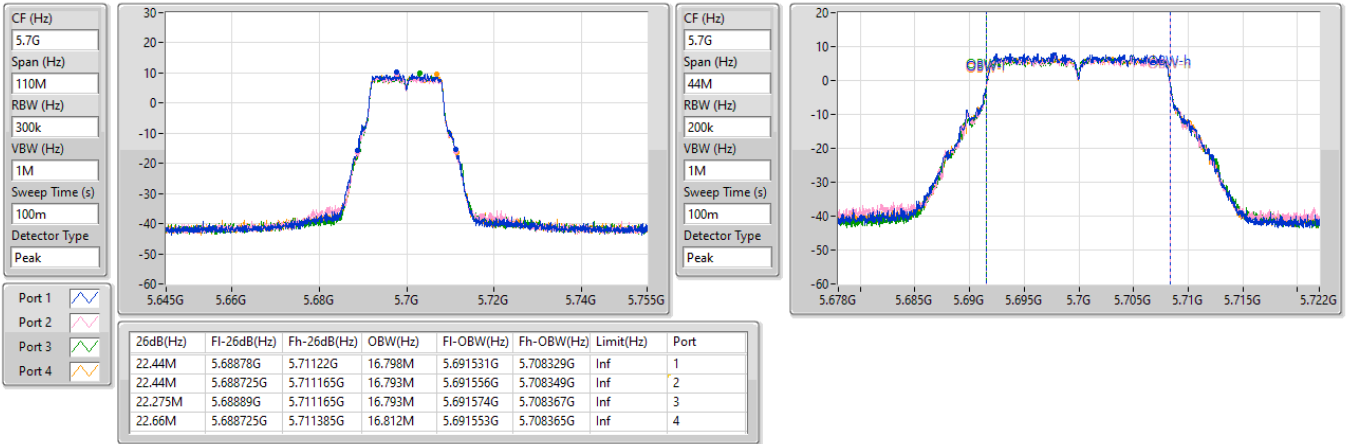

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5745MHz

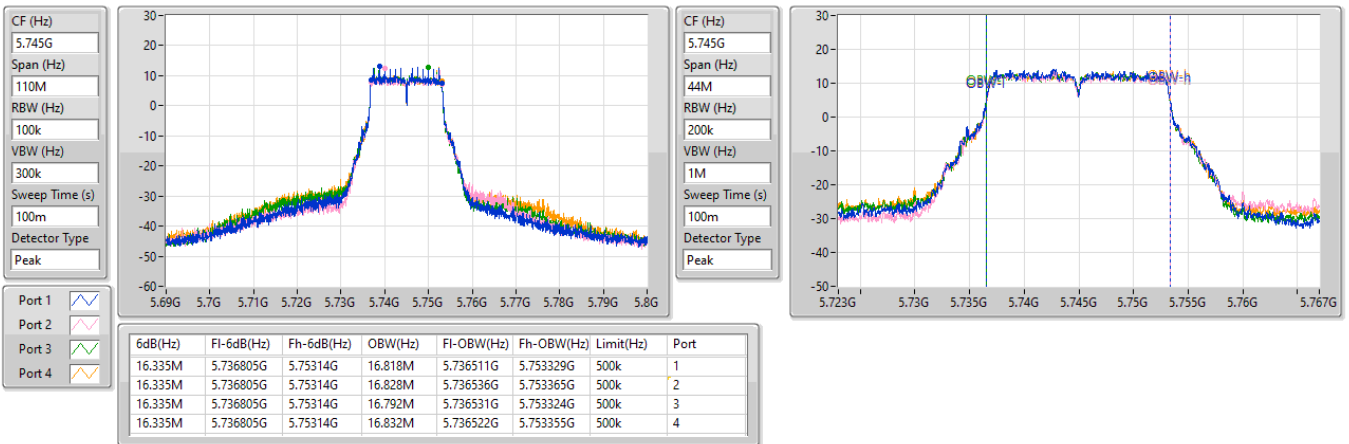




5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

EBW


5785MHz

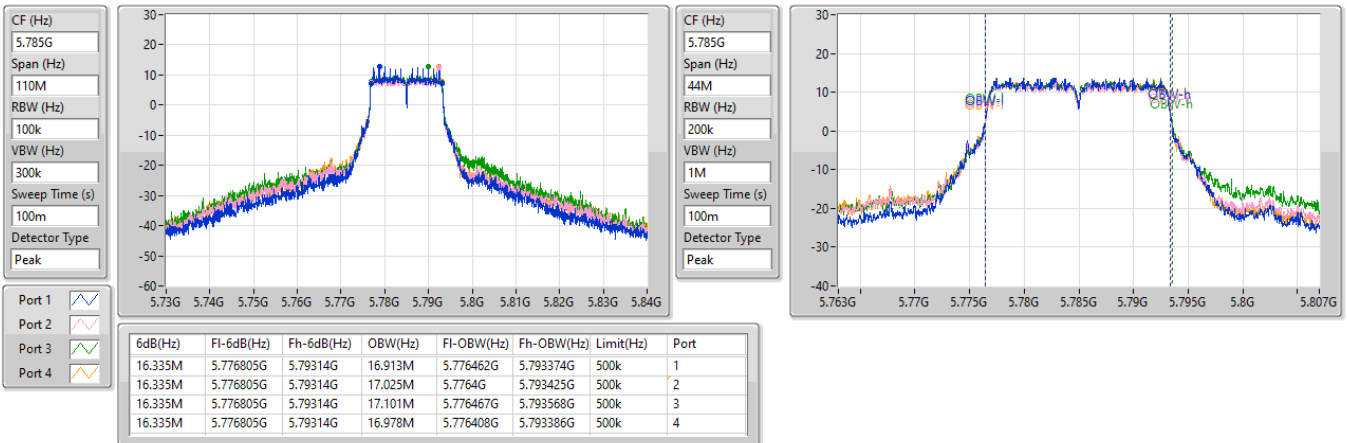

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5825MHz


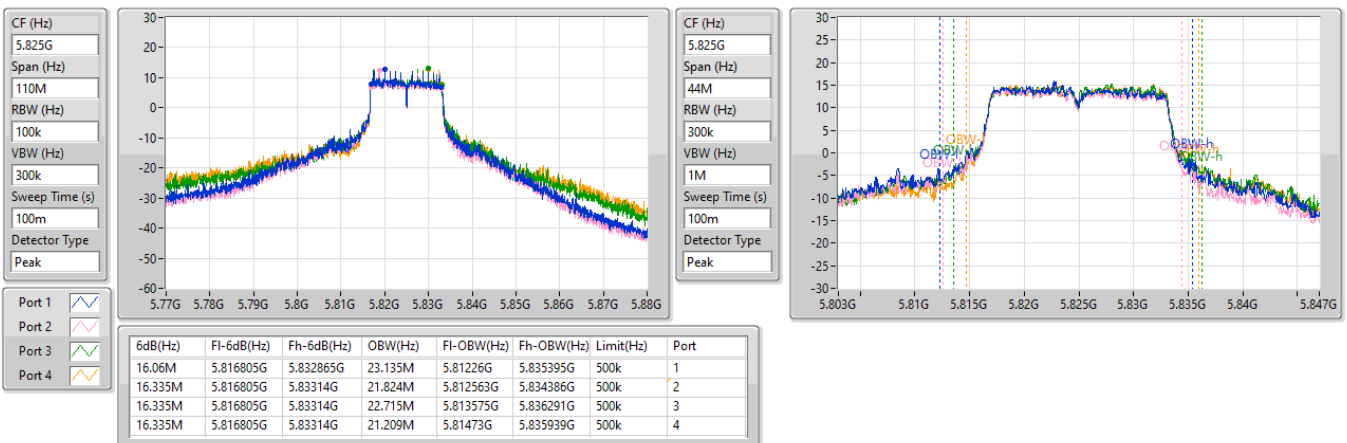




5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



5180MHz

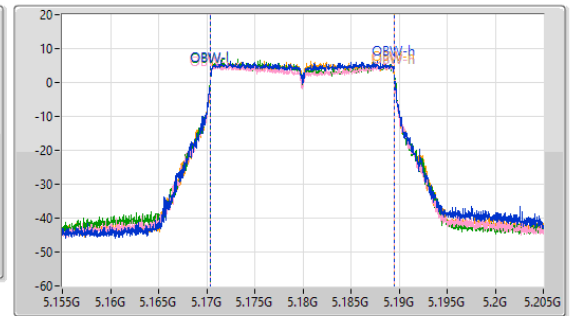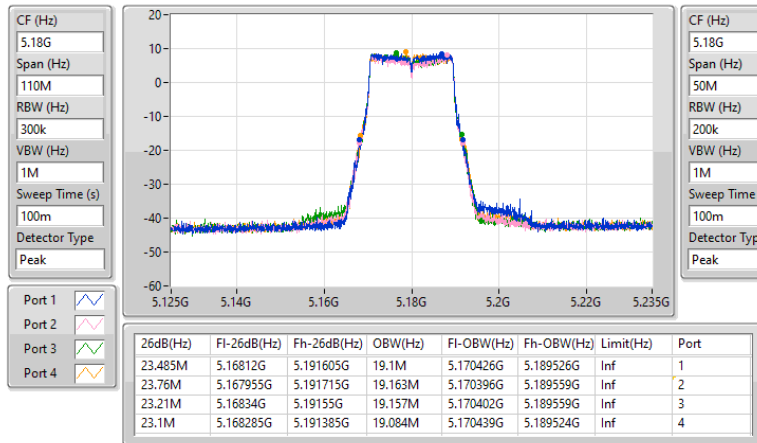

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5200MHz

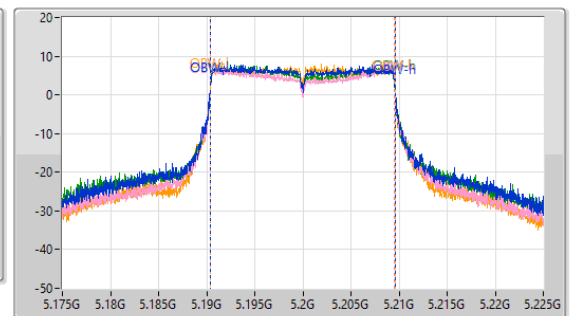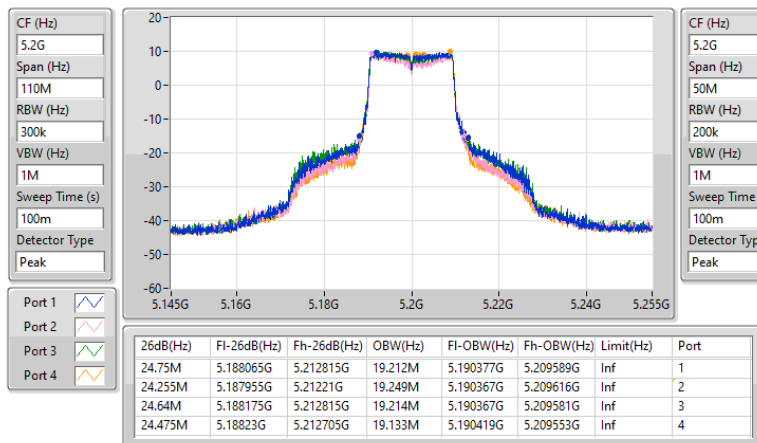




5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


5240MHz

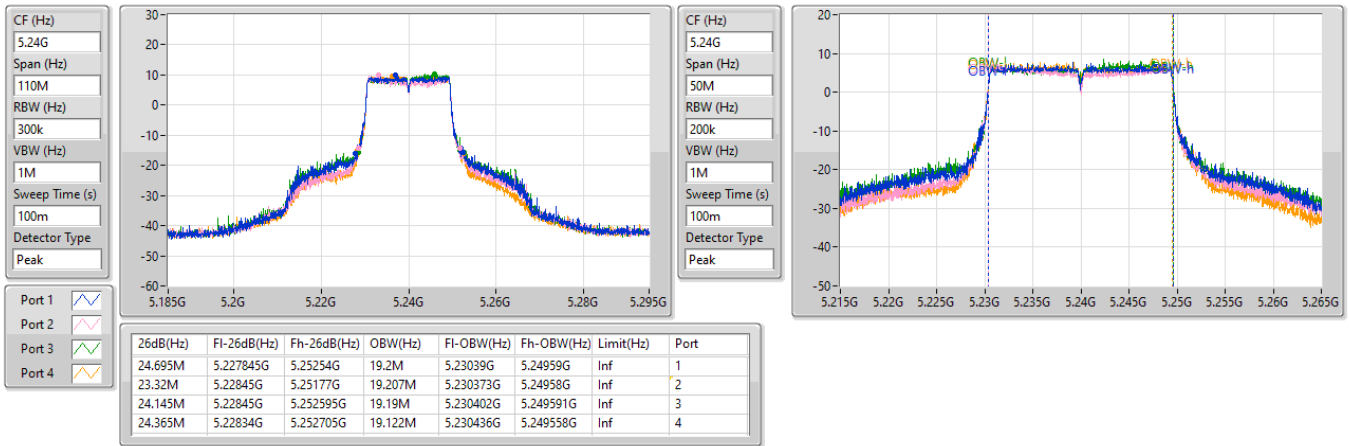

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5260MHz


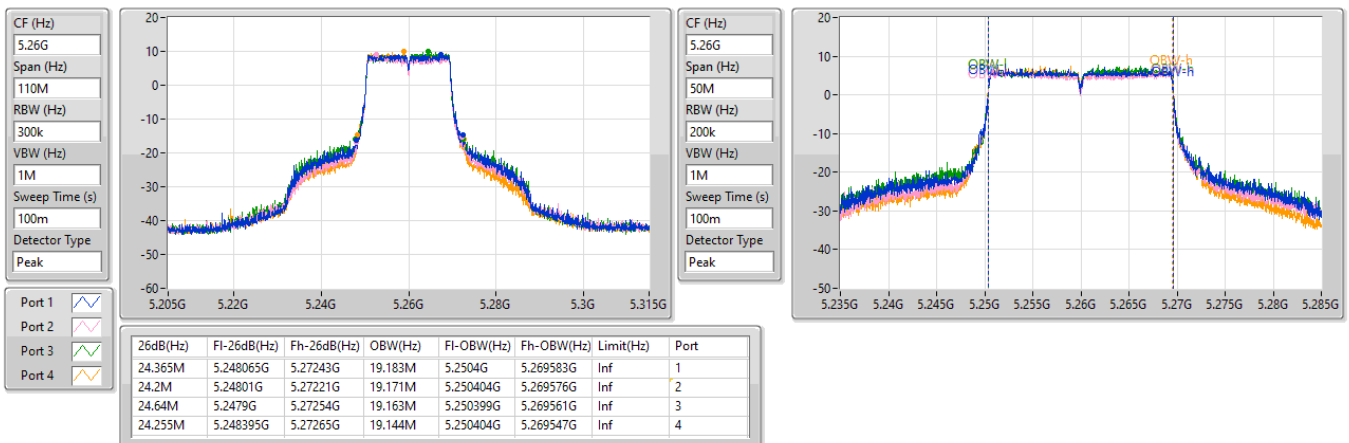




5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



5300MHz

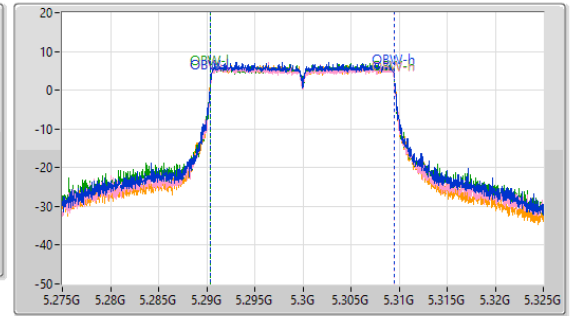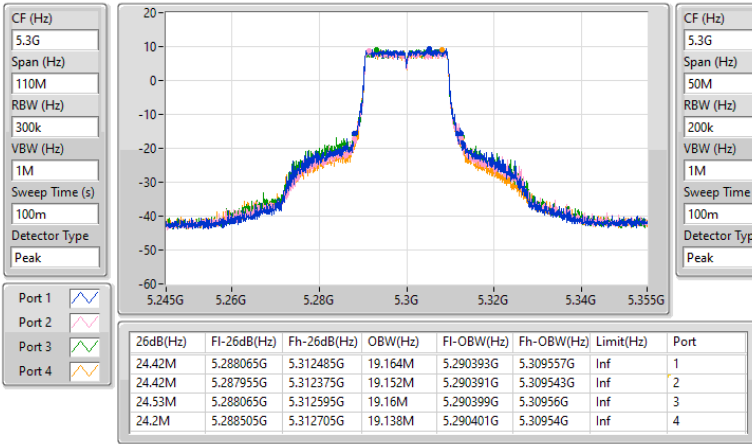

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5320MHz

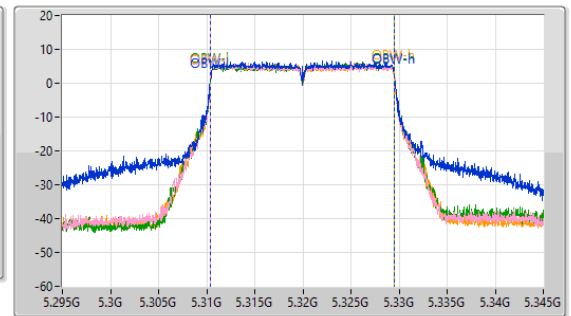
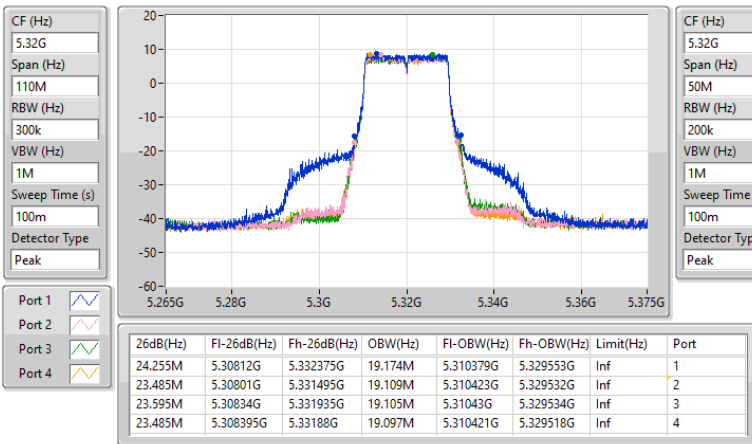




5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



5500MHz

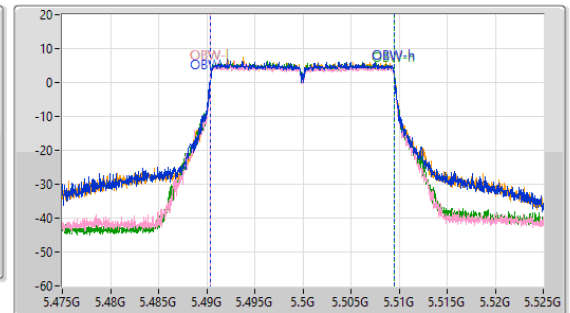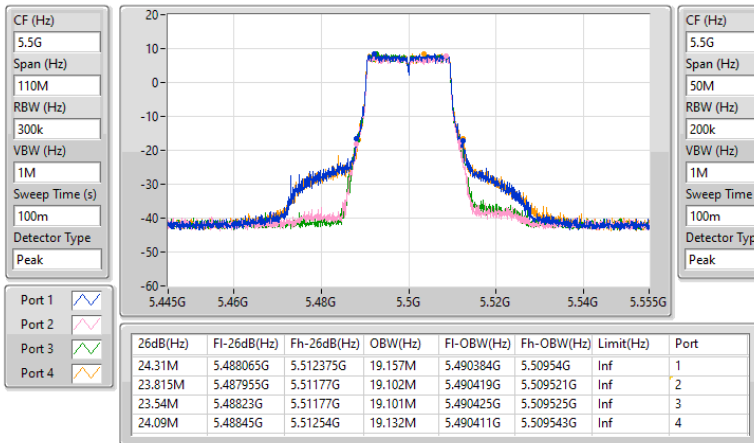

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5580MHz

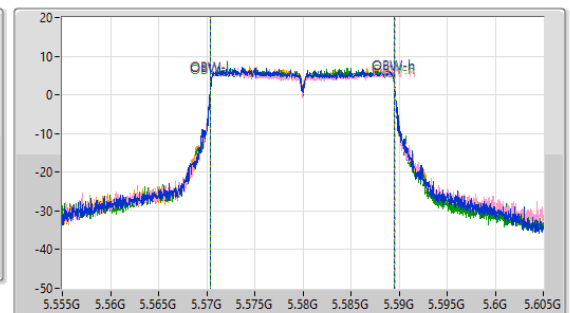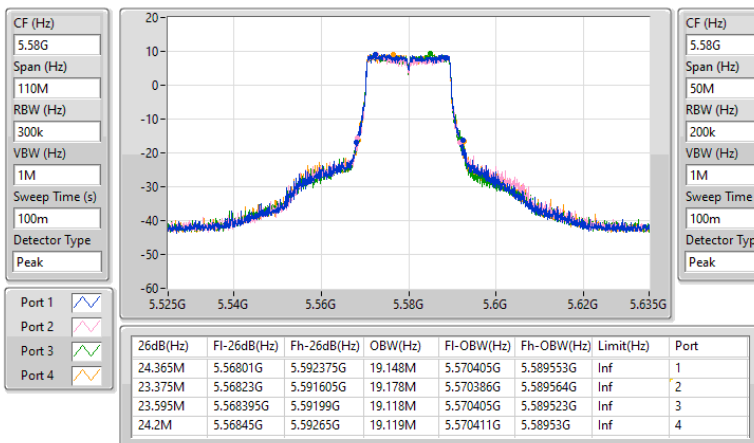




5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


5700MHz

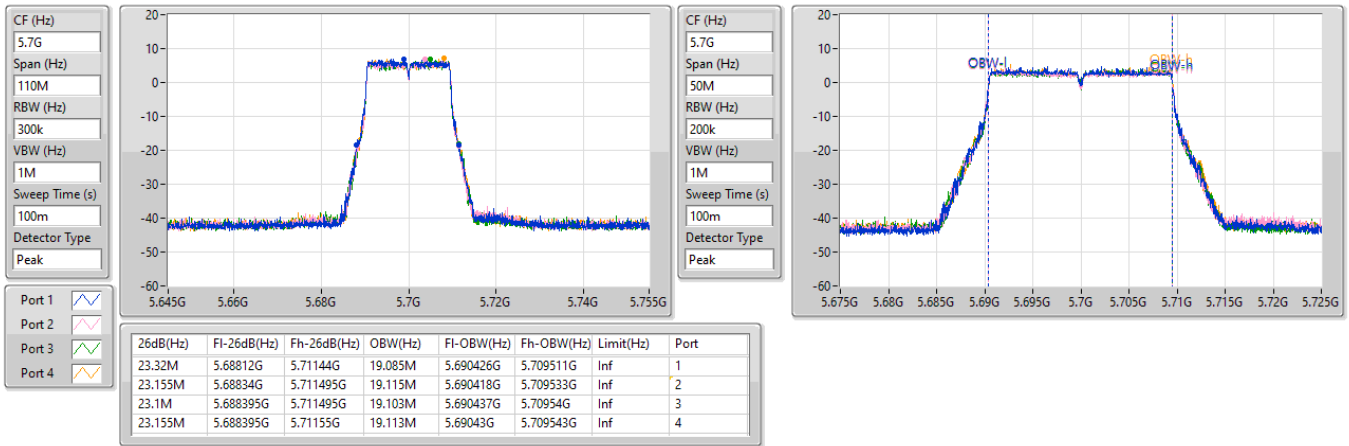

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5745MHz


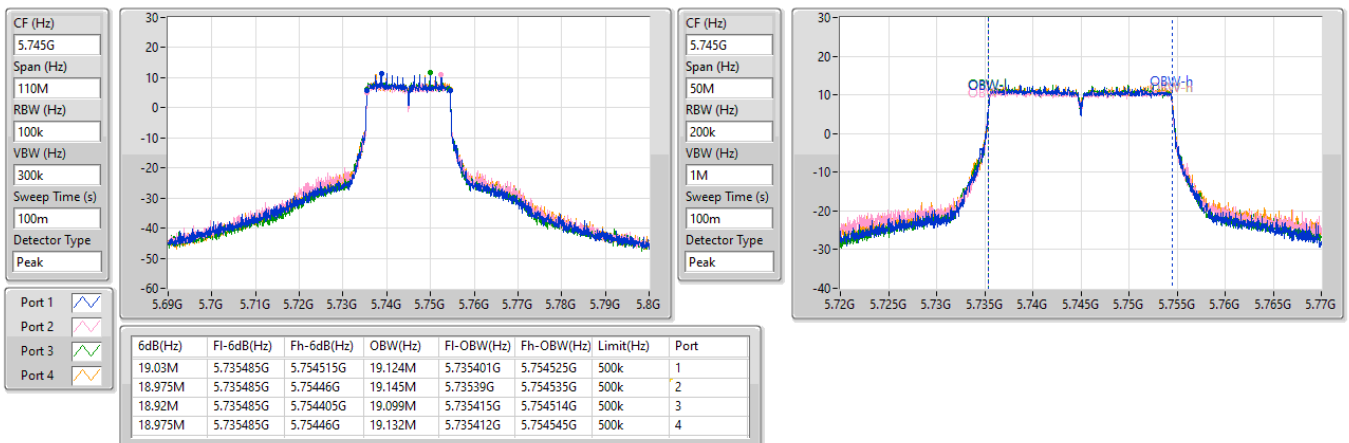




5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW



5785MHz

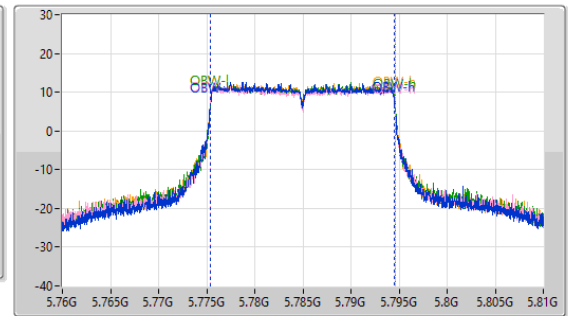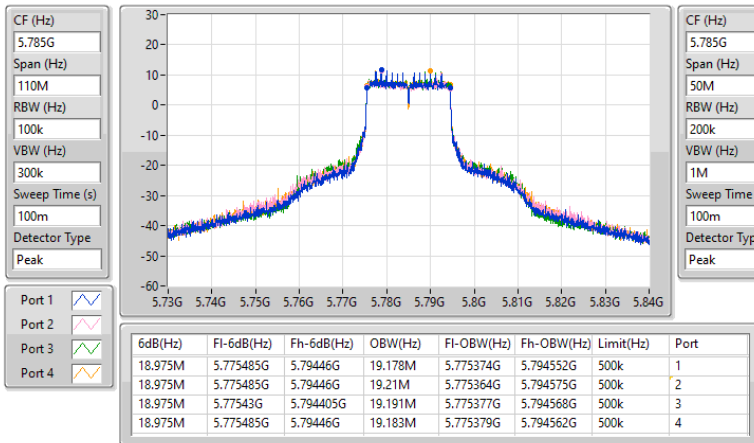

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5825MHz

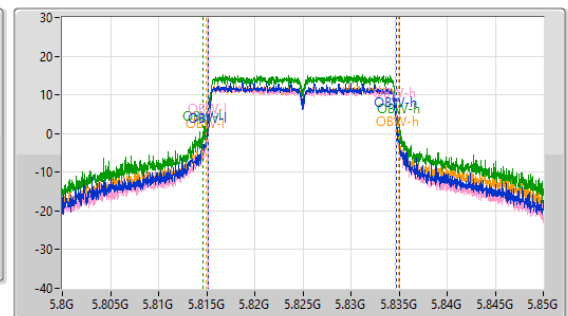
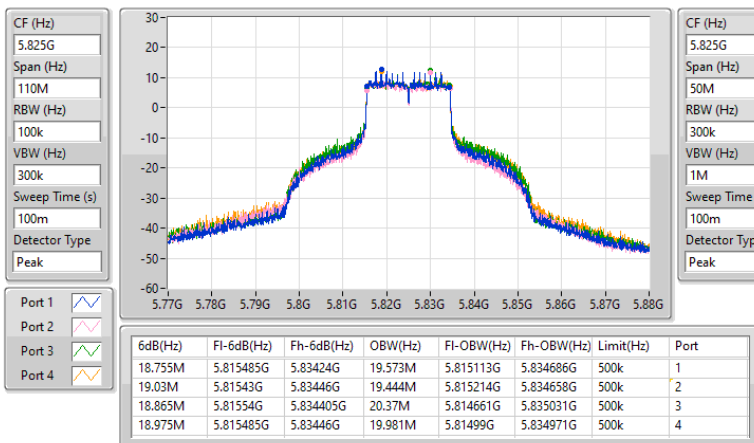




5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



5190MHz

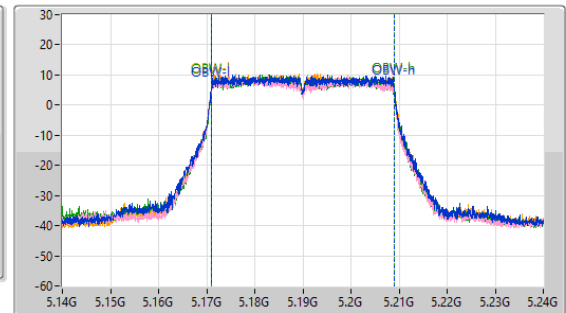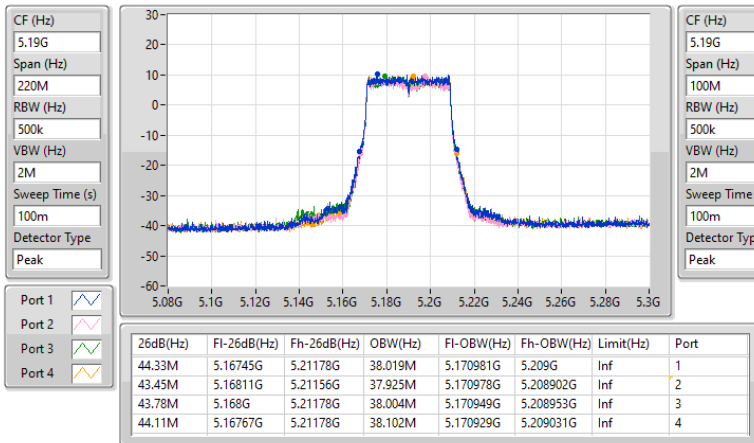

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5230MHz

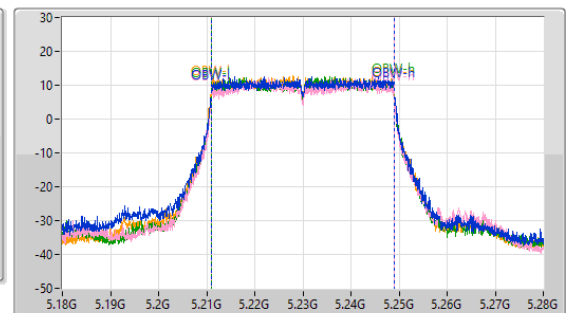
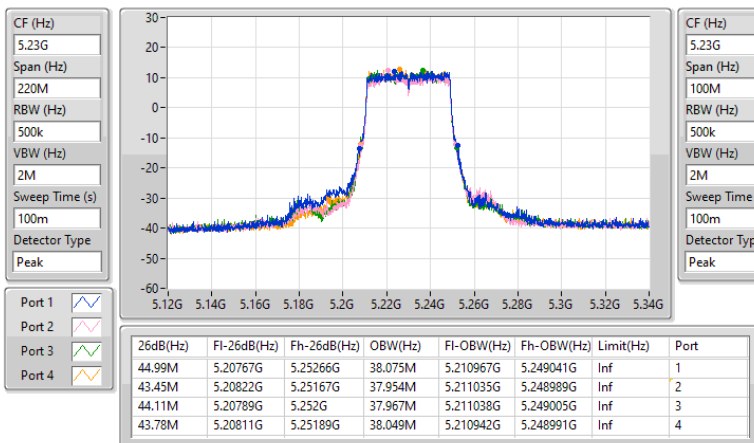




5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



5270MHz

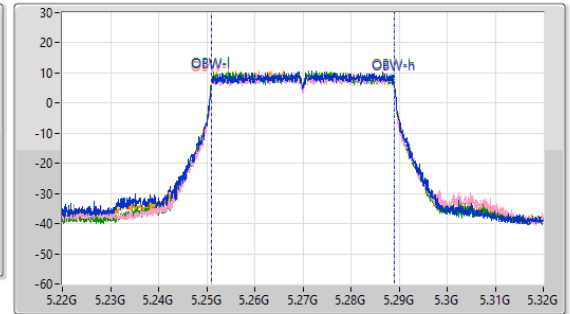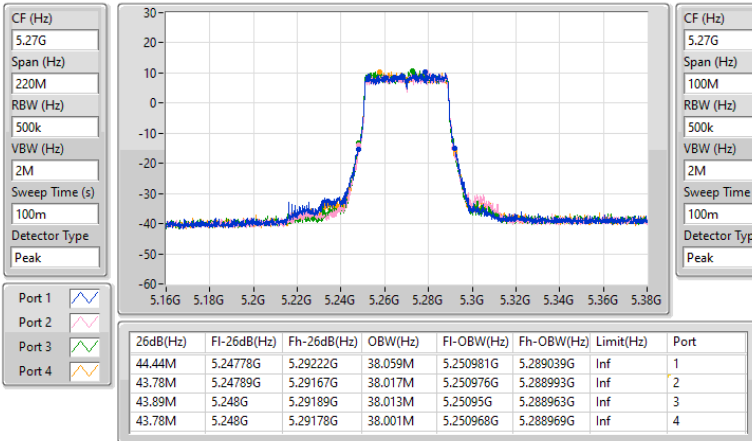

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5310MHz

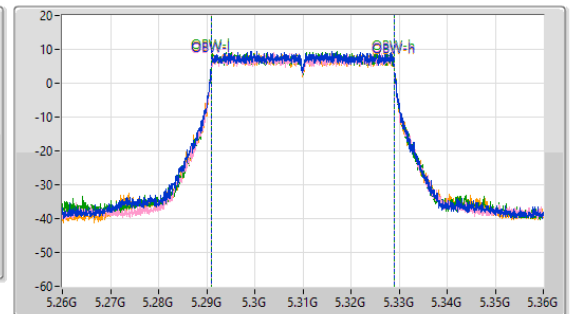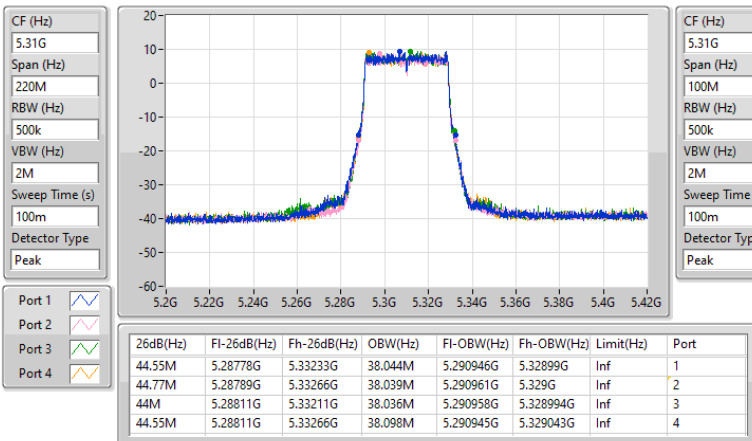




5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


5510MHz

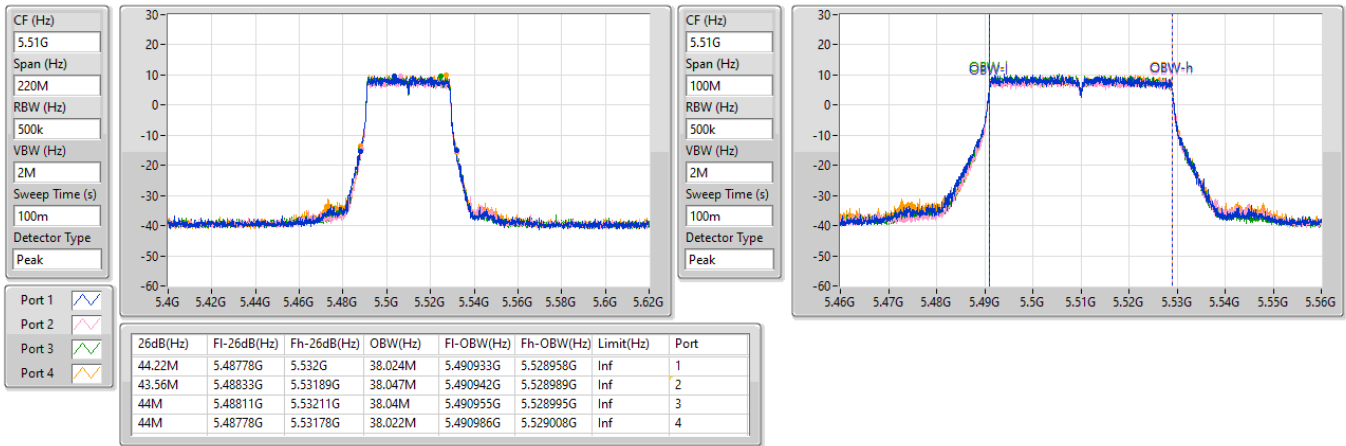

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5590MHz

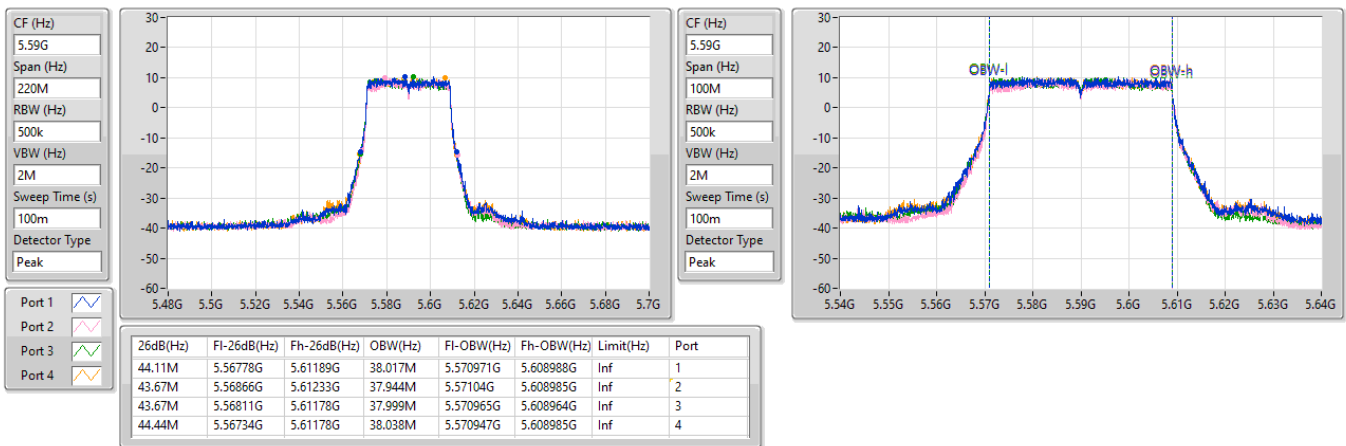




5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW


5670MHz

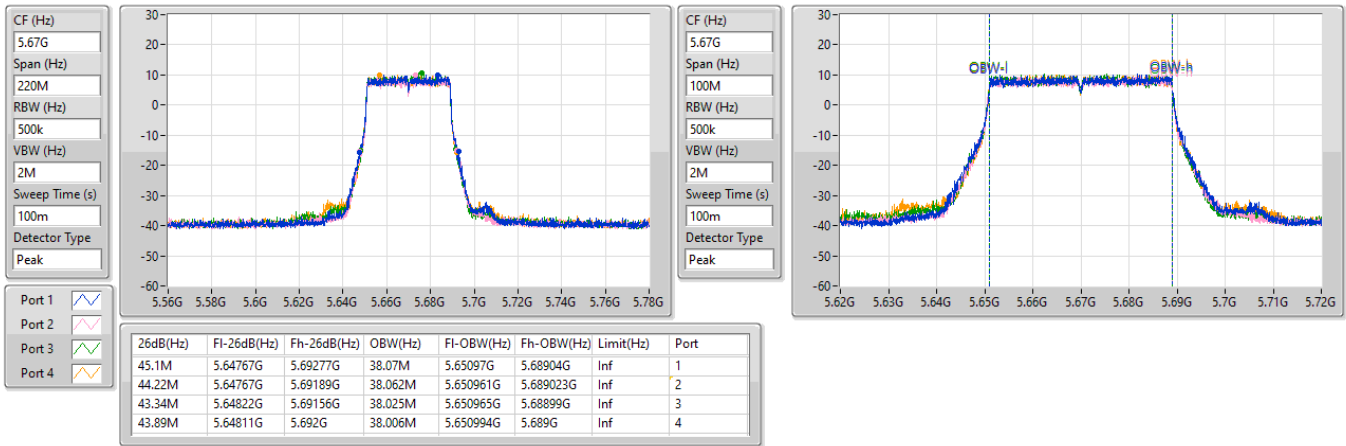

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5755MHz


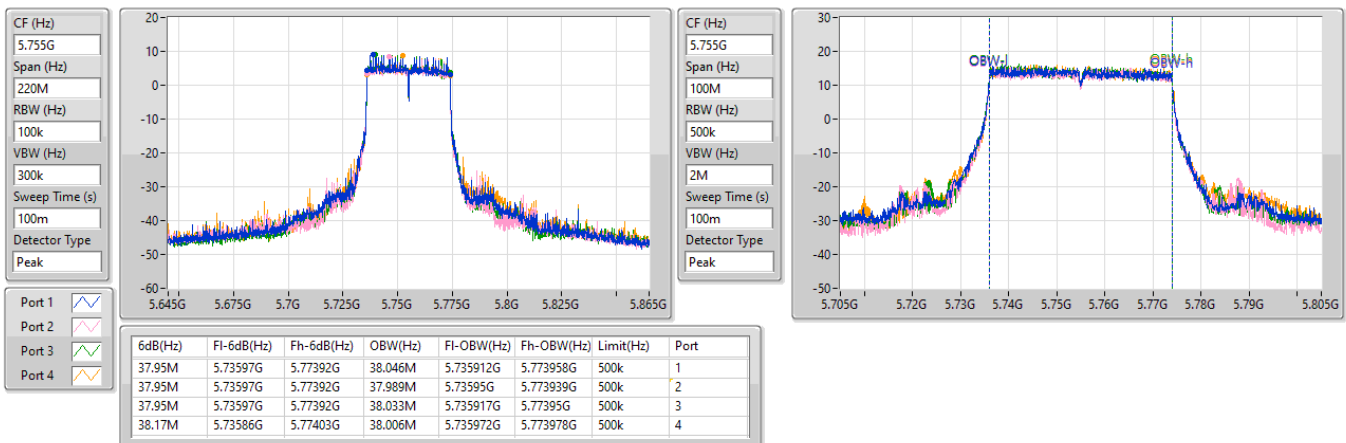




5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW



5795MHz

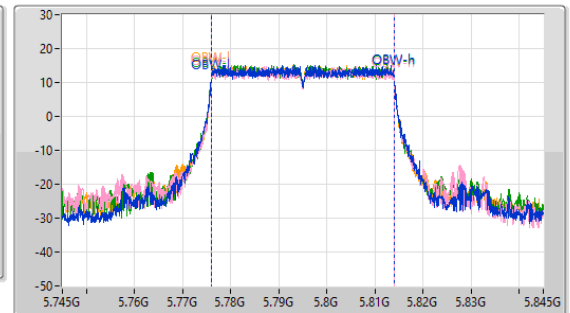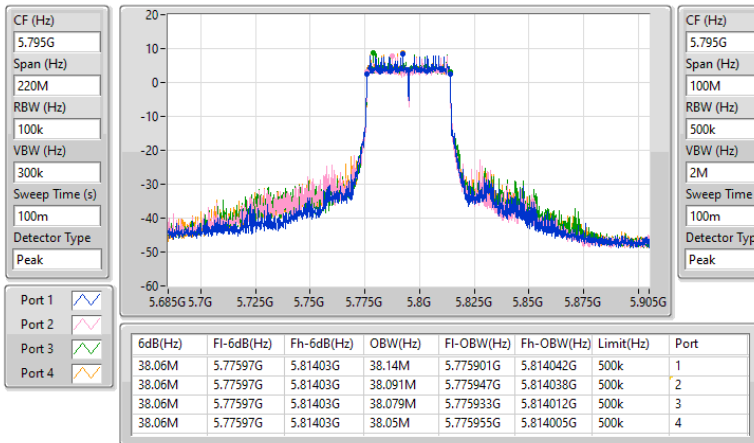

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5210MHz

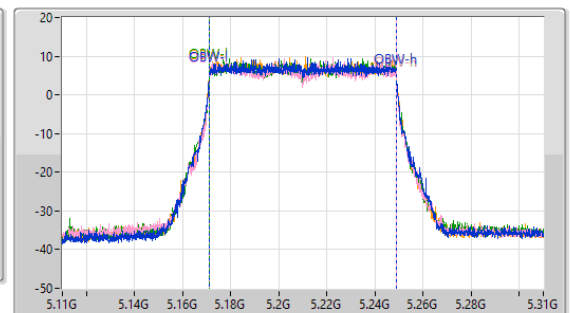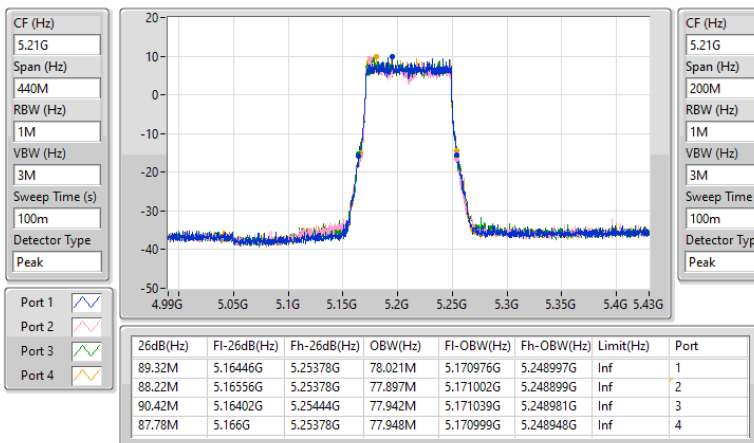




5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW


5290MHz

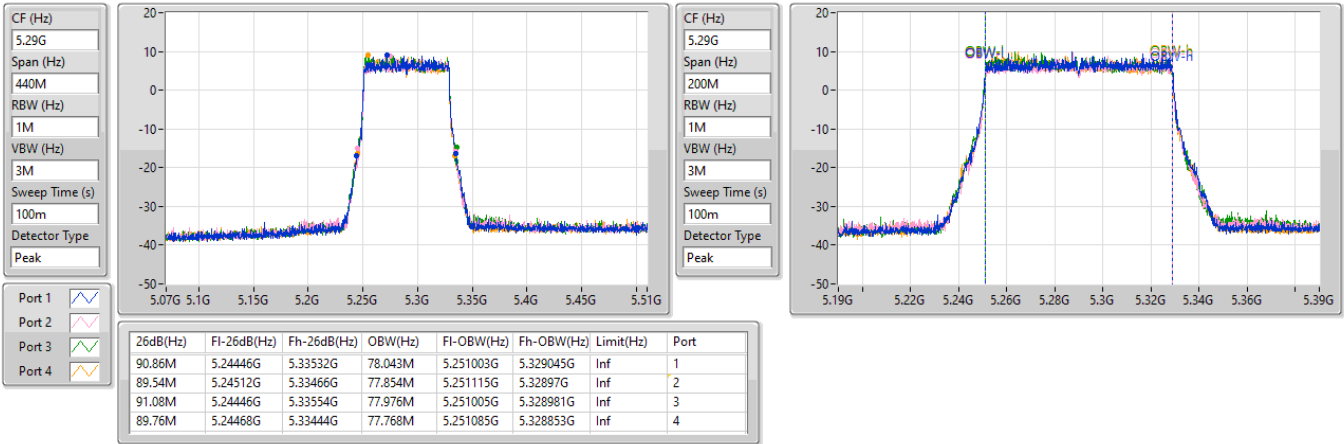

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5530MHz

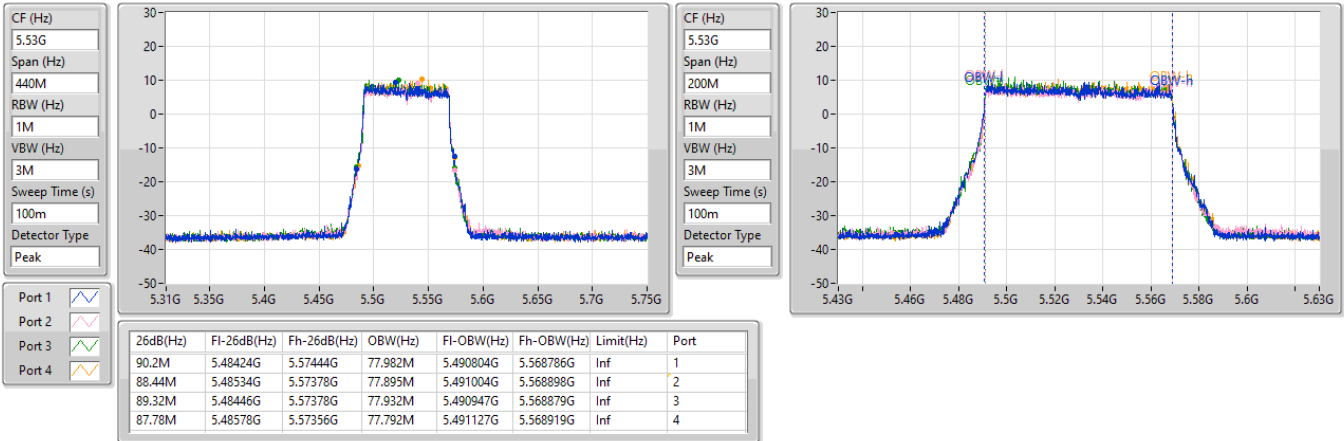




5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW


5610MHz

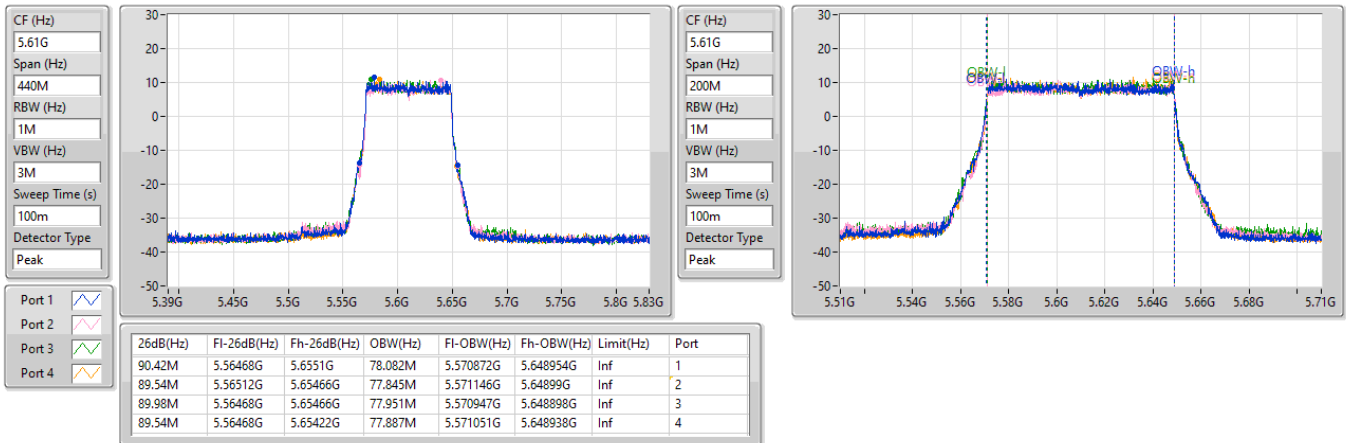

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5775MHz

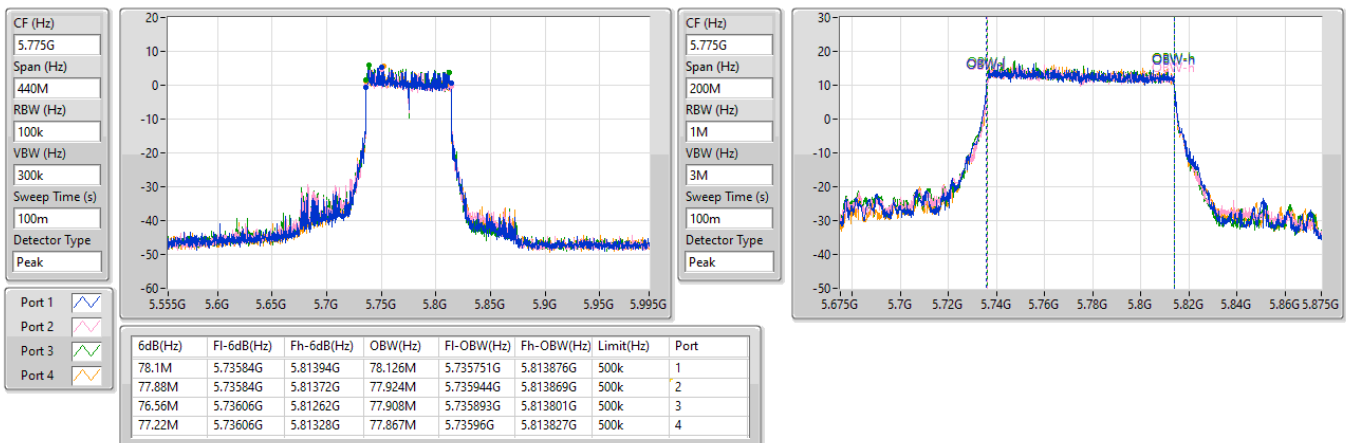




5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW


5250MHz Straddle 5.15-5.25GHz

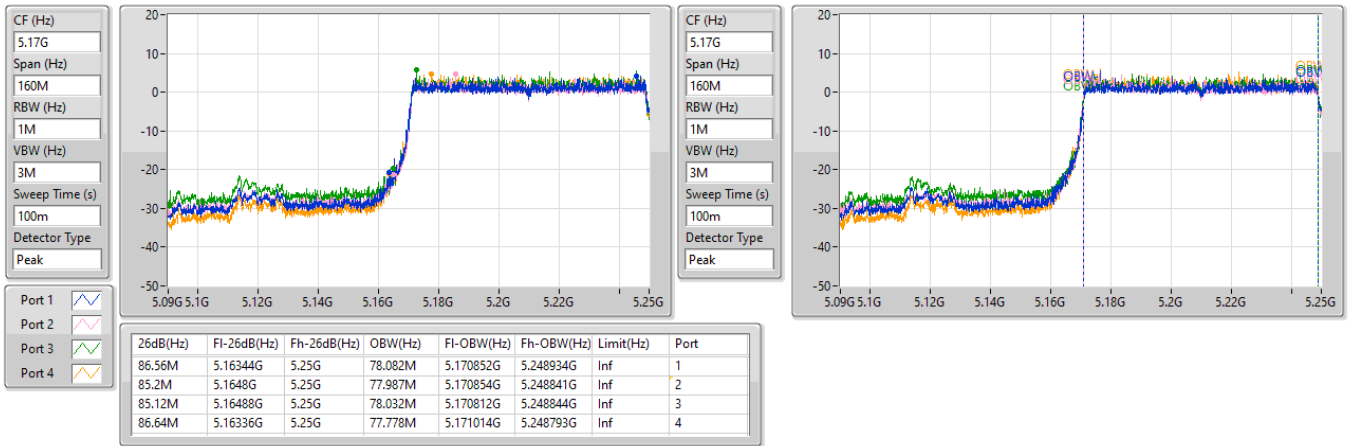

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

5250MHz Straddle 5.25-5.35GHz


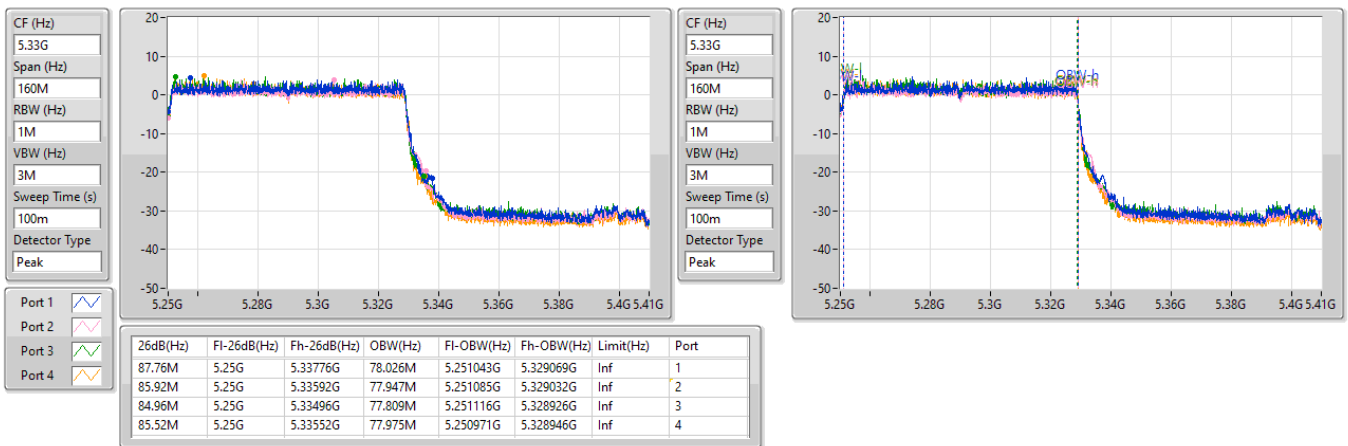




5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

5570MHz

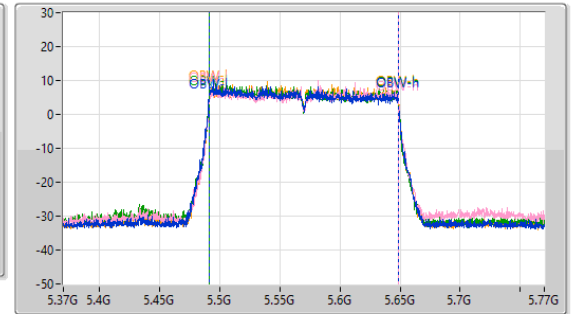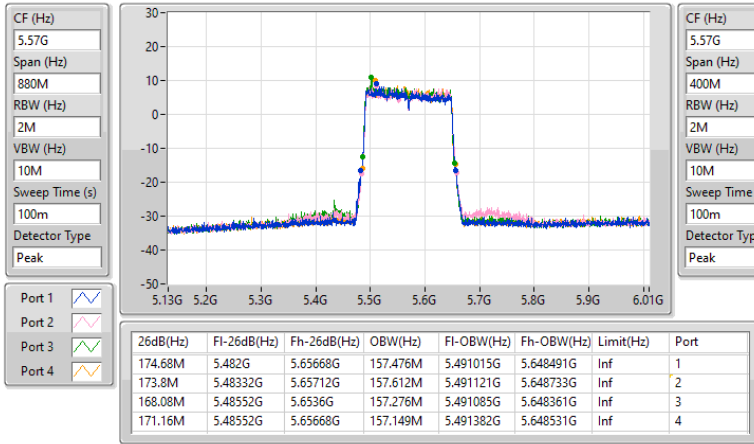

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	24.00	0.25119	26.76	0.47424
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	24.06	0.25468	26.82	0.48084
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	25.75	0.37584	28.51	0.70958
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	22.25	0.16788	25.01	0.31696
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	17.05	0.05070	19.81	0.09572
5.25-5.35GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	23.62	0.23014	26.46	0.44259
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	23.67	0.23281	26.51	0.44771
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	23.89	0.24491	26.73	0.47098
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	21.74	0.14928	24.58	0.28708
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	16.75	0.04732	19.59	0.09099
5.47-5.725GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	23.83	0.24155	26.80	0.47863
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	23.56	0.22699	26.53	0.44978
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	23.88	0.24434	26.85	0.48417
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	23.82	0.24099	26.79	0.47753
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	20.59	0.11455	23.56	0.22699
5.725-5.85GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	29.40	0.87096	32.32	1.70608
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	29.16	0.82414	32.08	1.61436
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	29.39	0.86896	32.31	1.70216
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	28.07	0.64121	30.99	1.25603

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	2.76	18.11	17.67	17.96	18.17	24.00	30.00	26.76	36.00
5200MHz	Pass	2.76	17.93	17.68	17.96	18.14	23.95	30.00	26.71	36.00
5240MHz	Pass	2.76	17.77	17.52	18.12	17.97	23.87	30.00	26.63	36.00
5260MHz	Pass	2.84	17.65	17.53	17.41	17.64	23.58	24.00	26.42	30.00
5300MHz	Pass	2.84	17.65	17.72	17.41	17.63	23.62	24.00	26.46	30.00
5320MHz	Pass	2.84	17.54	17.56	17.42	17.58	23.55	24.00	26.39	30.00
5500MHz	Pass	2.97	17.95	17.84	17.48	17.97	23.83	24.00	26.80	30.00
5580MHz	Pass	2.97	17.69	17.37	17.22	17.98	23.60	24.00	26.57	30.00
5700MHz	Pass	2.97	17.96	17.57	17.54	18.13	23.83	24.00	26.80	30.00
5745MHz	Pass	2.92	23.75	22.61	23.28	23.76	29.40	30.00	32.32	36.00
5785MHz	Pass	2.92	23.49	23.16	22.94	23.56	29.32	30.00	32.24	36.00
5825MHz	Pass	2.92	23.52	23.36	22.96	23.62	29.39	30.00	32.31	36.00
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	2.76	16.47	16.29	16.34	16.65	22.46	30.00	25.22	36.00
5200MHz	Pass	2.76	18.05	17.75	18.16	18.2	24.06	30.00	26.82	36.00
5240MHz	Pass	2.76	17.81	17.52	18.42	17.97	23.96	30.00	26.72	36.00
5260MHz	Pass	2.84	17.69	17.74	17.49	17.69	23.67	24.00	26.51	30.00
5300MHz	Pass	2.84	17.61	17.78	17.44	17.65	23.64	24.00	26.48	30.00
5320MHz	Pass	2.84	16.75	16.62	16.66	16.54	22.66	24.00	25.50	30.00
5500MHz	Pass	2.97	16.39	16.24	16.52	16.53	22.44	24.00	25.41	30.00
5520MHz	Pass	2.97	17.61	17.15	17.29	17.84	23.50	24.00	26.47	30.00
5580MHz	Pass	2.97	17.65	17.23	17.34	17.89	23.56	24.00	26.53	30.00
5680MHz	Pass	2.97	17.59	17.21	17.3	17.78	23.50	24.00	26.47	30.00
5700MHz	Pass	2.97	14.55	14.35	14.56	14.77	20.58	24.00	23.55	30.00
5745MHz	Pass	2.92	22.29	22.06	22.54	22.86	28.47	30.00	31.39	36.00
5785MHz	Pass	2.92	22.64	22.09	22.56	22.78	28.55	30.00	31.47	36.00
5825MHz	Pass	2.92	23.25	23.21	22.84	23.24	29.16	30.00	32.08	36.00
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	2.76	17.49	17.13	17.38	17.55	23.41	30.00	26.17	36.00
5230MHz	Pass	2.76	19.75	19.15	19.98	19.97	25.75	30.00	28.51	36.00
5270MHz	Pass	2.84	17.87	17.96	17.76	17.88	23.89	24.00	26.73	30.00
5310MHz	Pass	2.84	16.58	16.45	16.63	16.44	22.55	24.00	25.39	30.00
5510MHz	Pass	2.97	17.68	17.46	17.35	17.71	23.57	24.00	26.54	30.00
5590MHz	Pass	2.97	17.93	17.66	17.69	18.15	23.88	24.00	26.85	30.00
5670MHz	Pass	2.97	17.66	17.29	17.42	17.83	23.58	24.00	26.55	30.00
5755MHz	Pass	2.92	23.59	23.27	23.14	23.47	29.39	30.00	32.31	36.00
5795MHz	Pass	2.92	22.32	22.05	22.62	22.71	28.45	30.00	31.37	36.00
802.11be	-	-	-	-	-	-	-	-	-	-




Conducted Output Power(Average)

Appendix B

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
EHT80_Nss1,(MCS0)_4TX-OFDMA										
5210MHz	Pass	2.76	16.02	16.13	16.42	16.32	22.25	30.00	25.01	36.00
5290MHz	Pass	2.84	15.64	15.53	15.89	15.82	21.74	24.00	24.58	30.00
5530MHz	Pass	2.97	16.01	16.02	16.35	16.34	22.20	24.00	25.17	30.00
5610MHz	Pass	2.97	17.73	17.77	17.68	18.01	23.82	24.00	26.79	30.00
5775MHz	Pass	2.92	21.86	21.73	22.25	22.31	28.07	30.00	30.99	36.00
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	2.76	10.67	10.61	11.51	11.26	17.05	30.00	19.81	36.00
5250MHz Straddle 5.25-5.35GHz	Pass	2.84	10.99	10.33	10.92	10.65	16.75	24.00	19.59	30.00
5570MHz	Pass	2.97	14.49	14.63	14.89	14.26	20.59	24.00	23.56	30.00

DG = Directional Gain; Port X = Port X output power

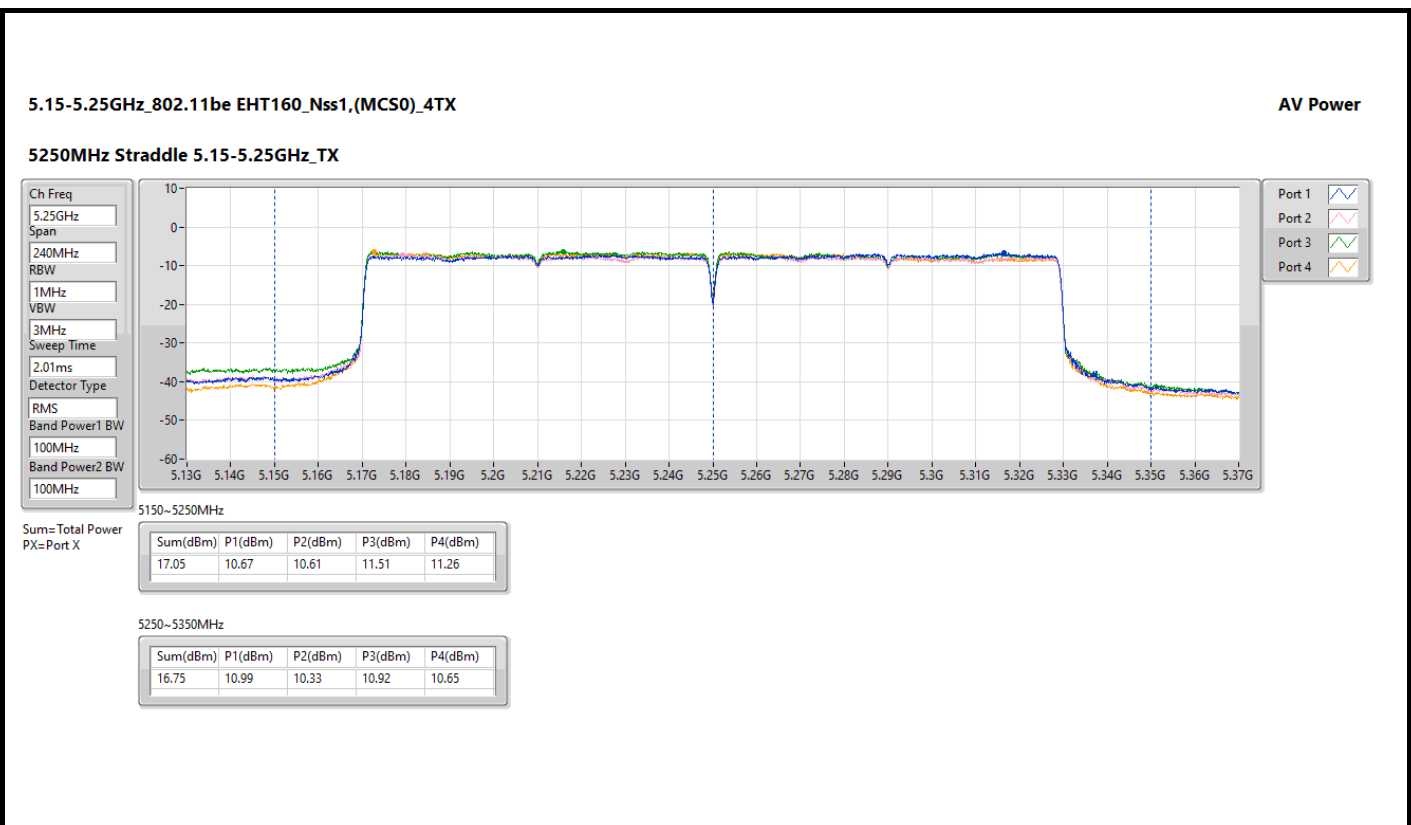

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX-OFDMA	21.04	0.12706	26.82	0.48084
802.11be EHT40-BF_Nss1,(MCS0)_4TX-OFDMA	22.73	0.18750	28.51	0.70958
802.11be EHT80-BF_Nss1,(MCS0)_4TX-OFDMA	19.23	0.08375	25.01	0.31696
802.11be EHT160-BF_Nss1,(MCS0)_4TX-OFDMA	13.98	0.02500	19.76	0.09462
5.25-5.35GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX-OFDMA	20.60	0.11482	26.51	0.44771
802.11be EHT40-BF_Nss1,(MCS0)_4TX-OFDMA	20.82	0.12078	26.73	0.47098
802.11be EHT80-BF_Nss1,(MCS0)_4TX-OFDMA	18.67	0.07362	24.58	0.28708
802.11be EHT160-BF_Nss1,(MCS0)_4TX-OFDMA	13.68	0.02333	19.59	0.09099
5.47-5.725GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX-OFDMA	20.80	0.12023	26.53	0.44978
802.11be EHT40-BF_Nss1,(MCS0)_4TX-OFDMA	21.12	0.12942	26.85	0.48417
802.11be EHT80-BF_Nss1,(MCS0)_4TX-OFDMA	21.06	0.12764	26.79	0.47753
802.11be EHT160-BF_Nss1,(MCS0)_4TX-OFDMA	17.83	0.06067	23.56	0.22699
5.725-5.85GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX-OFDMA	26.76	0.47424	32.08	1.61436
802.11be EHT40-BF_Nss1,(MCS0)_4TX-OFDMA	26.99	0.50003	32.31	1.70216
802.11be EHT80-BF_Nss1,(MCS0)_4TX-OFDMA	25.67	0.36898	30.99	1.25603

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	5.78	13.45	13.27	13.32	13.63	19.44	30.00	25.22	36.00
5200MHz	Pass	5.78	15.03	14.73	15.14	15.18	21.04	30.00	26.82	36.00
5240MHz	Pass	5.78	14.79	14.5	15.4	14.95	20.94	30.00	26.72	36.00
5260MHz	Pass	5.91	14.62	14.67	14.42	14.62	20.60	24.00	26.51	30.00
5300MHz	Pass	5.91	14.54	14.71	14.37	14.58	20.57	24.00	26.48	30.00
5320MHz	Pass	5.91	13.68	13.55	13.59	13.47	19.59	24.00	25.50	30.00
5500MHz	Pass	5.73	13.63	13.48	13.76	13.77	19.68	24.00	25.41	30.00
5520MHz	Pass	5.73	14.85	14.39	14.53	15.08	20.74	24.00	26.47	30.00
5580MHz	Pass	5.73	14.89	14.47	14.58	15.13	20.80	24.00	26.53	30.00
5680MHz	Pass	5.73	14.83	14.45	14.54	15.02	20.74	24.00	26.47	30.00
5700MHz	Pass	5.73	11.79	11.59	11.8	12.01	17.82	24.00	23.55	30.00
5745MHz	Pass	5.32	19.89	19.66	20.14	20.46	26.07	30.00	31.39	36.00
5785MHz	Pass	5.32	20.24	19.69	20.16	20.38	26.15	30.00	31.47	36.00
5825MHz	Pass	5.32	20.85	20.81	20.44	20.84	26.76	30.00	32.08	36.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	5.78	14.47	14.11	14.36	14.53	20.39	30.00	26.17	36.00
5230MHz	Pass	5.78	16.73	16.13	16.96	16.95	22.73	30.00	28.51	36.00
5270MHz	Pass	5.91	14.8	14.89	14.69	14.81	20.82	24.00	26.73	30.00
5310MHz	Pass	5.91	13.51	13.38	13.56	13.37	19.48	24.00	25.39	30.00
5510MHz	Pass	5.73	14.92	14.7	14.59	14.95	20.81	24.00	26.54	30.00
5590MHz	Pass	5.73	15.17	14.9	14.93	15.39	21.12	24.00	26.85	30.00
5670MHz	Pass	5.73	14.9	14.53	14.66	15.07	20.82	24.00	26.55	30.00
5755MHz	Pass	5.32	21.19	20.87	20.74	21.07	26.99	30.00	32.31	36.00
5795MHz	Pass	5.32	19.92	19.65	20.22	20.31	26.05	30.00	31.37	36.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	5.78	13	13.11	13.4	13.3	19.23	30.00	25.01	36.00
5290MHz	Pass	5.91	12.57	12.46	12.82	12.75	18.67	24.00	24.58	30.00
5530MHz	Pass	5.73	13.25	13.26	13.59	13.58	19.44	24.00	25.17	30.00
5610MHz	Pass	5.73	14.97	15.01	14.92	15.25	21.06	24.00	26.79	30.00
5775MHz	Pass	5.32	19.46	19.33	19.85	19.91	25.67	30.00	30.99	36.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX-OFDMA	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	5.78	7.6	7.54	8.44	8.19	13.98	30.00	19.76	36.00
5250MHz Straddle 5.25-5.35GHz	Pass	5.91	7.92	7.26	7.85	7.58	13.68	24.00	19.59	30.00
5570MHz	Pass	5.73	11.73	11.87	12.13	11.5	17.83	24.00	23.56	30.00

DG = Directional Gain; Port X = Port X output power
Refers to antenna test report for DG gain.

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	10.54	16.32
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	10.25	16.03
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	9.44	15.22
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	2.50	8.28
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-2.43	3.35
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	10.44	16.35
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	9.59	15.50
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	7.59	13.50
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	2.29	8.20
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-2.59	3.32
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	10.64	16.37
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	9.72	15.45
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	7.48	13.21
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	4.14	9.87
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA	-1.27	4.46
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	15.37	20.69
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA	13.91	19.23
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA	11.65	16.97
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA	8.14	13.46

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



Result


Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_4TX										
5180MHz	Pass	5.78	4.93	3.98	4.74	5.07	10.54	17.00	16.32	23.00
5200MHz	Pass	5.78	4.81	4.04	4.76	5.10	10.52	17.00	16.30	23.00
5240MHz	Pass	5.78	4.50	4.35	5.05	4.75	10.20	17.00	15.98	23.00
5260MHz	Pass	5.91	4.62	4.18	5.17	4.74	10.44	11.00	16.35	17.00
5300MHz	Pass	5.91	4.63	4.14	4.53	4.37	10.31	11.00	16.22	17.00
5320MHz	Pass	5.91	4.51	4.09	4.30	3.97	10.15	11.00	16.06	17.00
5500MHz	Pass	5.73	4.61	4.18	4.63	4.58	10.46	11.00	16.19	17.00
5580MHz	Pass	5.73	4.65	4.25	4.40	4.54	10.36	11.00	16.09	17.00
5700MHz	Pass	5.73	5.17	4.56	4.66	4.75	10.64	11.00	16.37	17.00
5745MHz	Pass	5.32	9.55	9.12	9.36	9.51	15.37	30.00	20.69	36.00
5785MHz	Pass	5.32	9.14	8.75	9.11	9.28	15.05	30.00	20.37	36.00
5825MHz	Pass	5.32	9.05	8.69	8.88	9.05	14.87	30.00	20.19	36.00
802.11be EHT20_Nss1,(MCS0)_4TX-OFDMA										
5180MHz	Pass	5.78	3.05	2.51	3.14	2.92	8.67	17.00	14.45	23.00
5200MHz	Pass	5.78	4.54	4.14	4.46	4.47	10.25	17.00	16.03	23.00
5240MHz	Pass	5.78	4.41	4.14	4.76	4.45	9.99	17.00	15.77	23.00
5260MHz	Pass	5.91	4.09	3.66	4.40	4.17	9.59	11.00	15.50	17.00
5300MHz	Pass	5.91	4.11	3.47	3.79	3.69	9.47	11.00	15.38	17.00
5320MHz	Pass	5.91	3.43	2.99	3.33	2.80	8.79	11.00	14.70	17.00
5500MHz	Pass	5.73	3.07	2.57	2.96	3.09	8.75	11.00	14.48	17.00
5580MHz	Pass	5.73	4.03	4.05	3.69	3.87	9.72	11.00	15.45	17.00
5700MHz	Pass	5.73	1.14	1.02	1.05	1.28	6.96	11.00	12.69	17.00
5745MHz	Pass	5.32	7.57	7.10	7.59	7.73	13.36	30.00	18.68	36.00
5785MHz	Pass	5.32	7.59	7.37	7.48	7.67	13.40	30.00	18.72	36.00
5825MHz	Pass	5.32	8.19	7.93	8.17	8.17	13.91	30.00	19.23	36.00
802.11be EHT40_Nss1,(MCS0)_4TX-OFDMA										
5190MHz	Pass	5.78	1.65	1.24	1.75	1.85	7.33	17.00	13.11	23.00
5230MHz	Pass	5.78	4.13	3.41	4.34	4.22	9.44	17.00	15.22	23.00
5270MHz	Pass	5.91	2.01	1.54	2.57	2.11	7.59	11.00	13.50	17.00
5310MHz	Pass	5.91	0.87	0.42	1.05	0.37	6.41	11.00	12.32	17.00
5510MHz	Pass	5.73	1.75	0.94	1.45	1.51	7.24	11.00	12.97	17.00
5590MHz	Pass	5.73	2.13	1.67	1.88	1.86	7.48	11.00	13.21	17.00
5670MHz	Pass	5.73	1.72	1.40	1.86	1.47	7.23	11.00	12.96	17.00
5755MHz	Pass	5.32	5.79	5.42	6.09	5.94	11.65	30.00	16.97	36.00
5795MHz	Pass	5.32	5.09	4.52	5.36	5.22	10.84	30.00	16.16	36.00
802.11be EHT80_Nss1,(MCS0)_4TX-OFDMA										
5210MHz	Pass	5.78	-2.93	-3.01	-2.33	-2.71	2.50	17.00	8.28	23.00
5290MHz	Pass	5.91	-3.22	-3.49	-3.00	-3.46	2.29	11.00	8.20	17.00
5530MHz	Pass	5.73	-2.34	-2.95	-2.63	-2.58	2.97	11.00	8.70	17.00
5610MHz	Pass	5.73	-1.36	-1.65	-1.10	-1.39	4.14	11.00	9.87	17.00
5775MHz	Pass	5.32	2.48	2.13	2.94	2.12	8.14	30.00	13.46	36.00
802.11be EHT160_Nss1,(MCS0)_4TX-OFDMA										
5250MHz Straddle 5.15-5.25GHz	Pass	5.78	-8.25	-8.19	-7.58	-7.71	-2.43	17.00	3.35	23.00
5250MHz Straddle 5.25-5.35GHz	Pass	5.91	-8.17	-8.59	-7.96	-8.04	-2.59	11.00	3.32	17.00
5570MHz	Pass	5.73	-6.67	-7.13	-6.51	-6.61	-1.27	11.00	4.46	17.00

DG = Directional Gain; Refers to antenna test report for DG gain. RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5180MHz

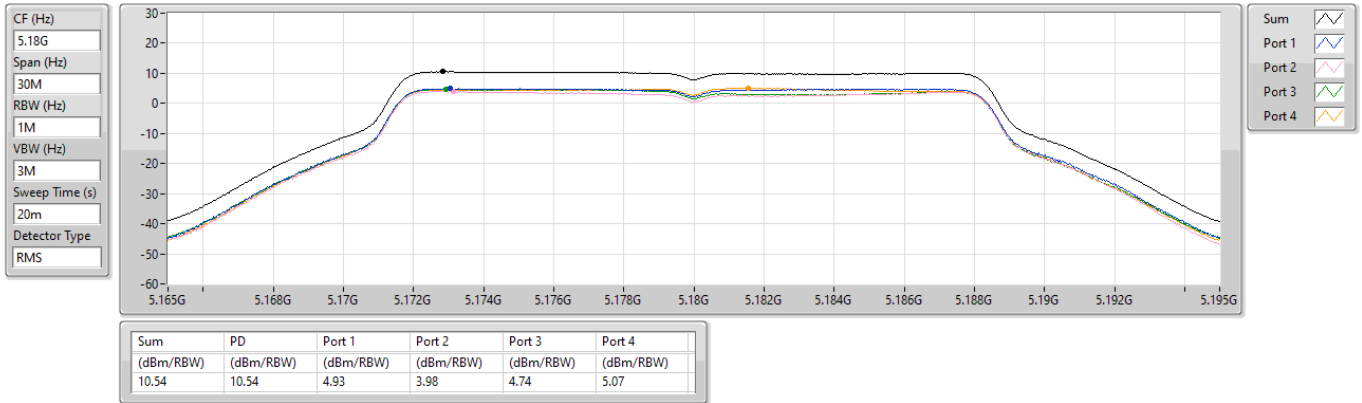

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5200MHz

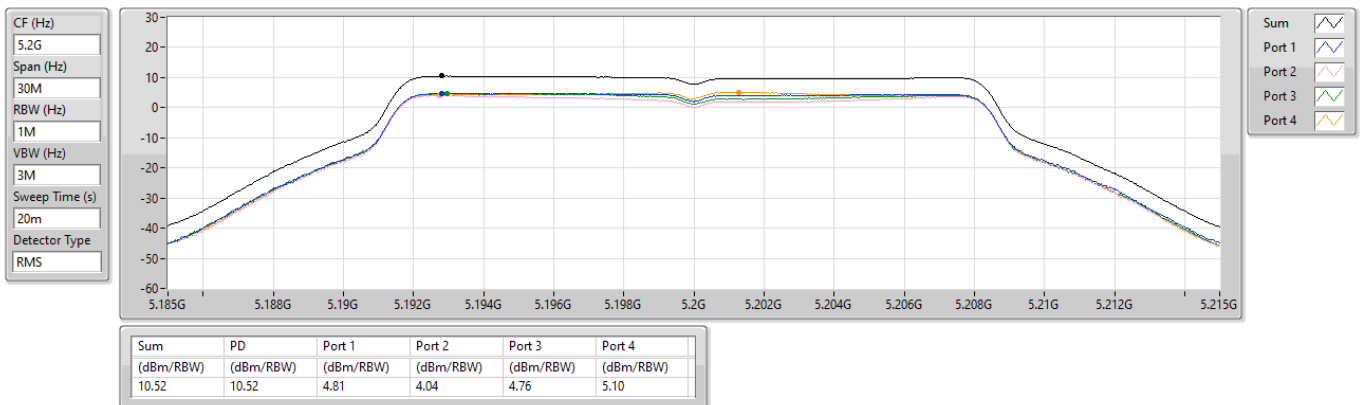




5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5240MHz

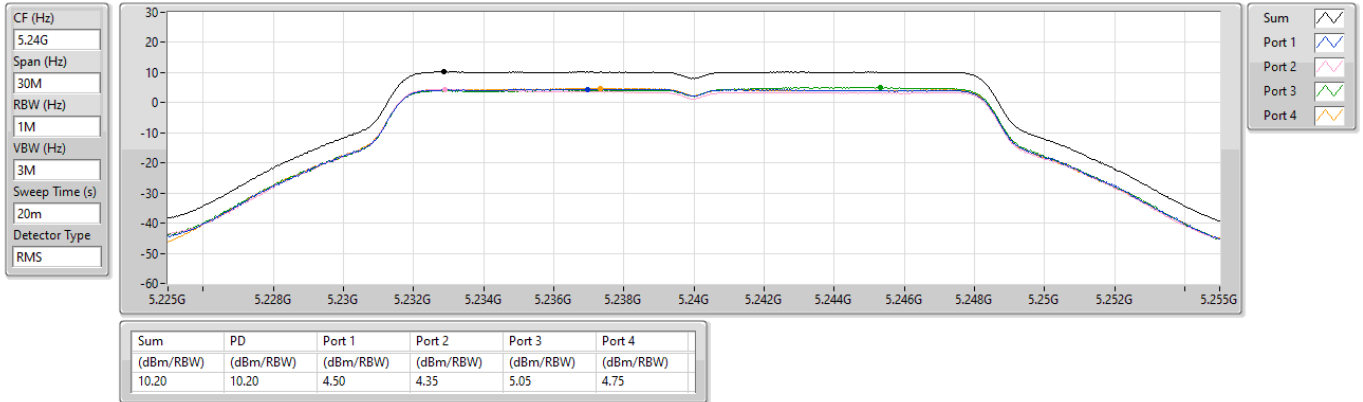

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5260MHz

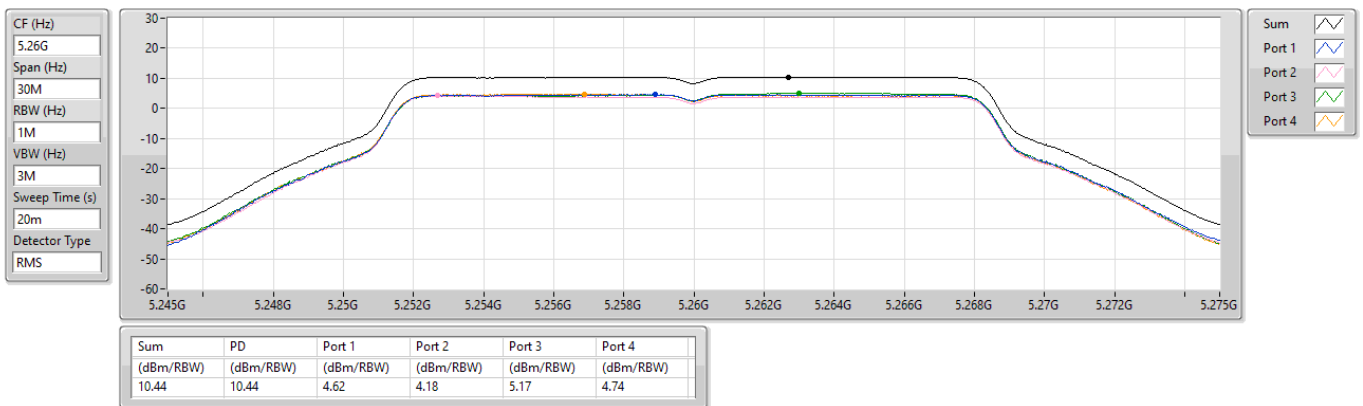




5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5300MHz

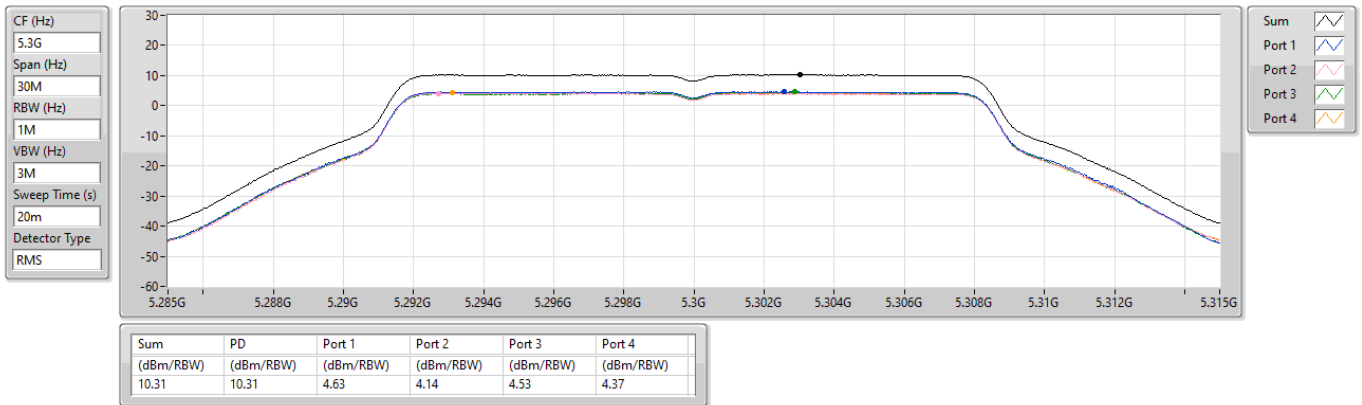

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5320MHz

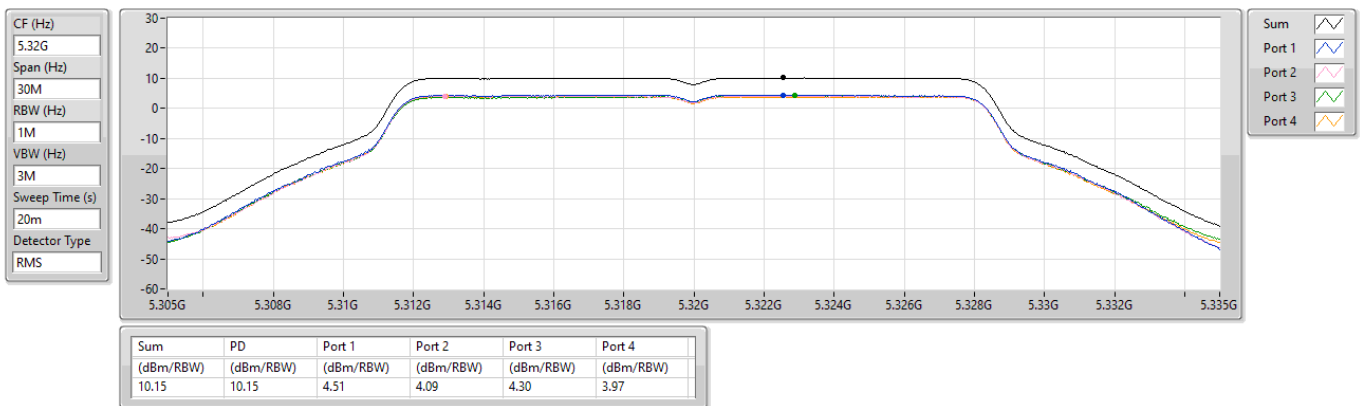

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5500MHz

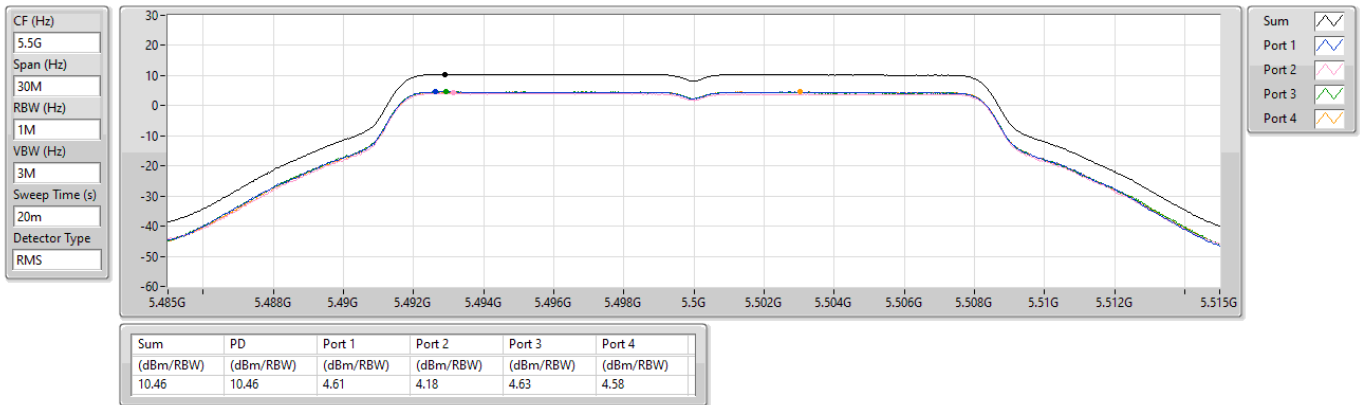

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5580MHz

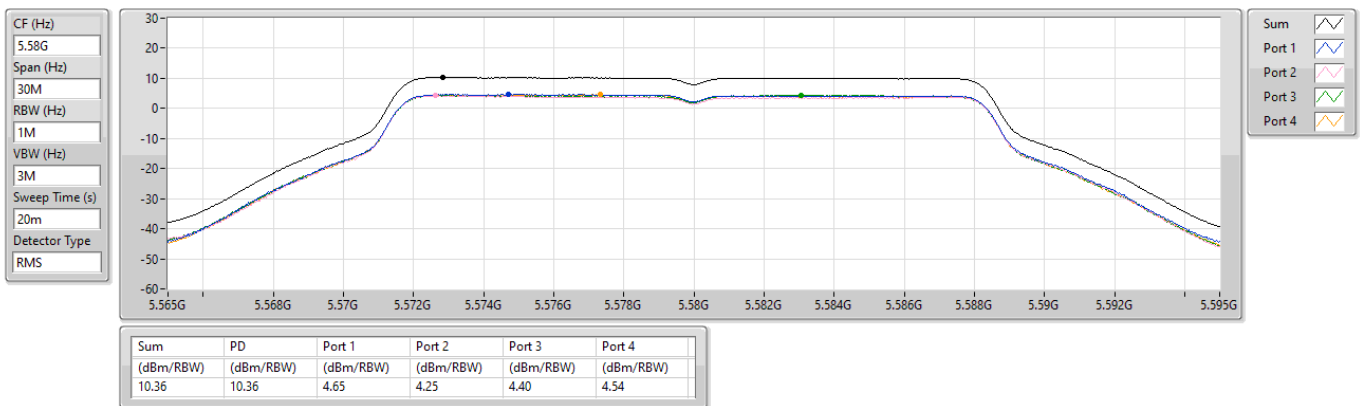




5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5700MHz

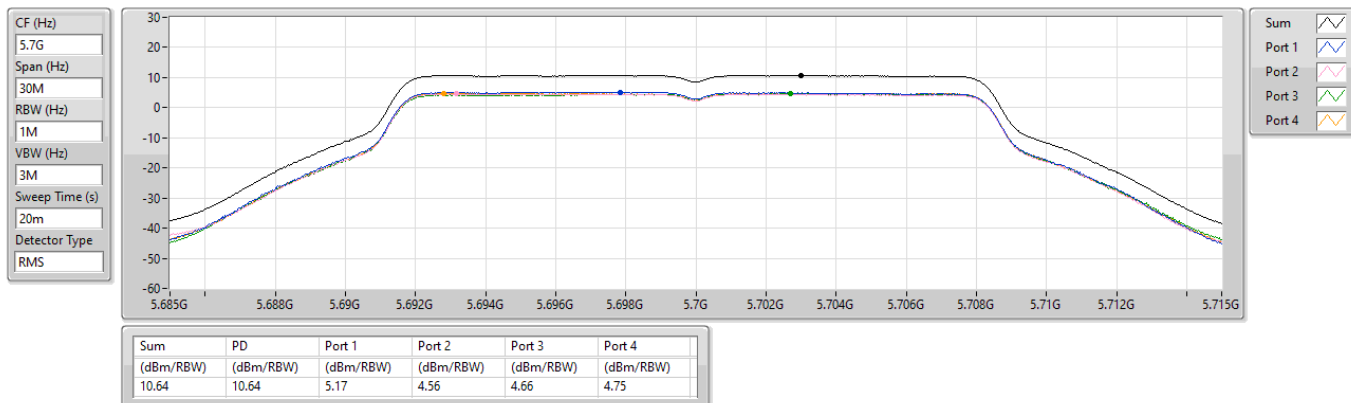

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5745MHz

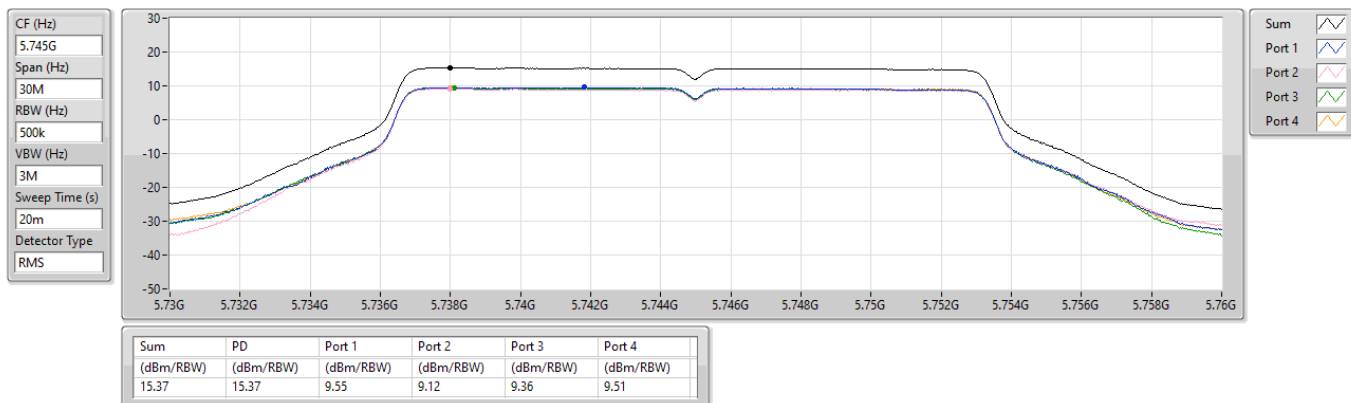

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5785MHz

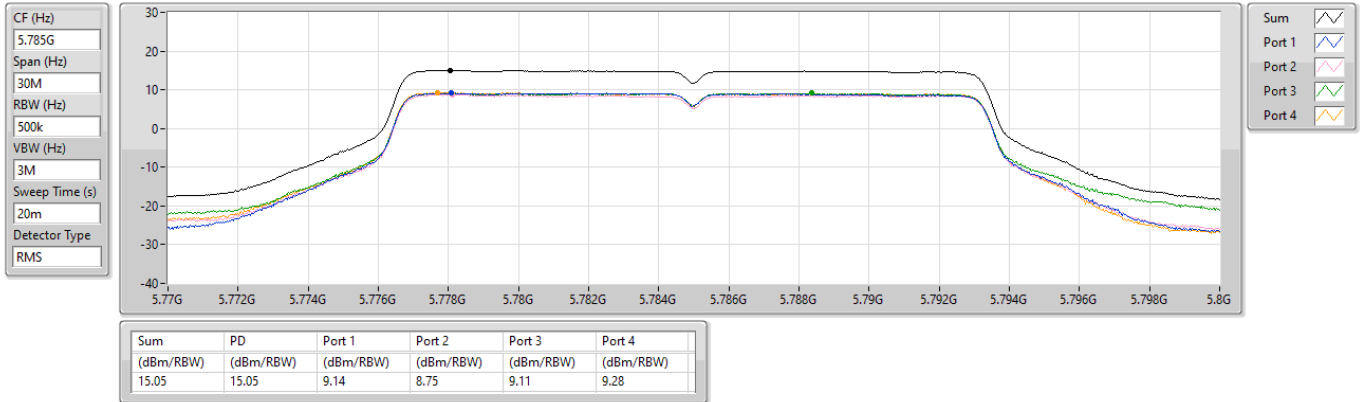

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5825MHz

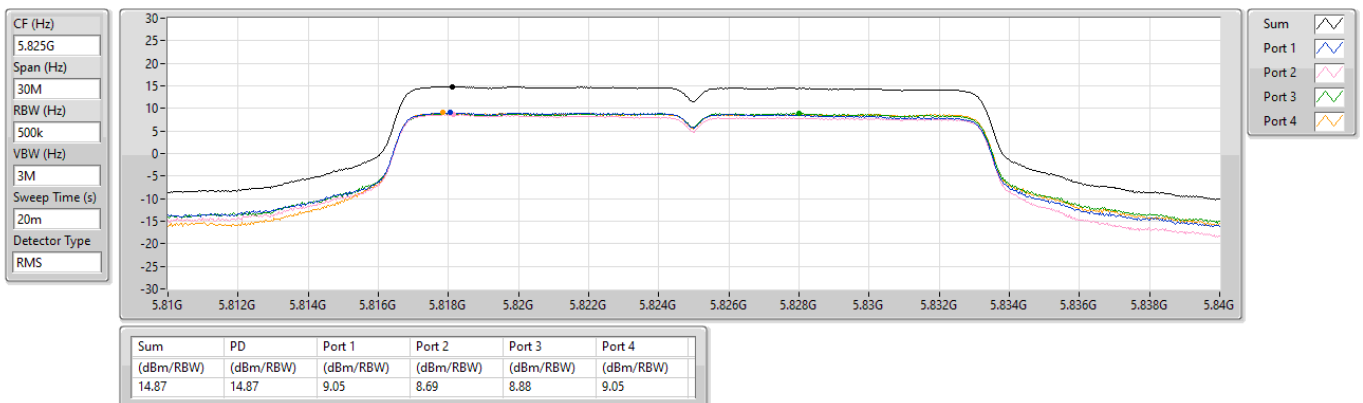

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5180MHz

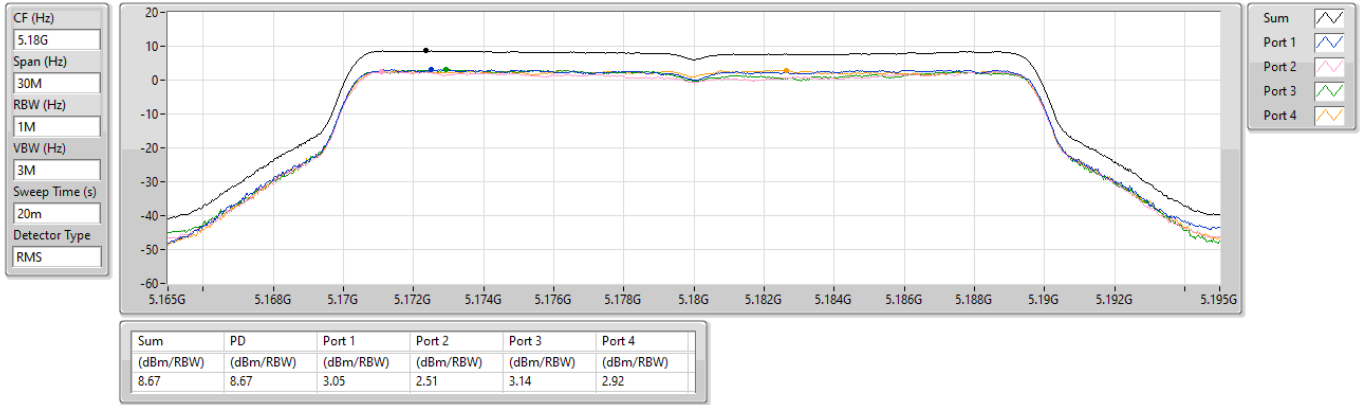

5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5200MHz

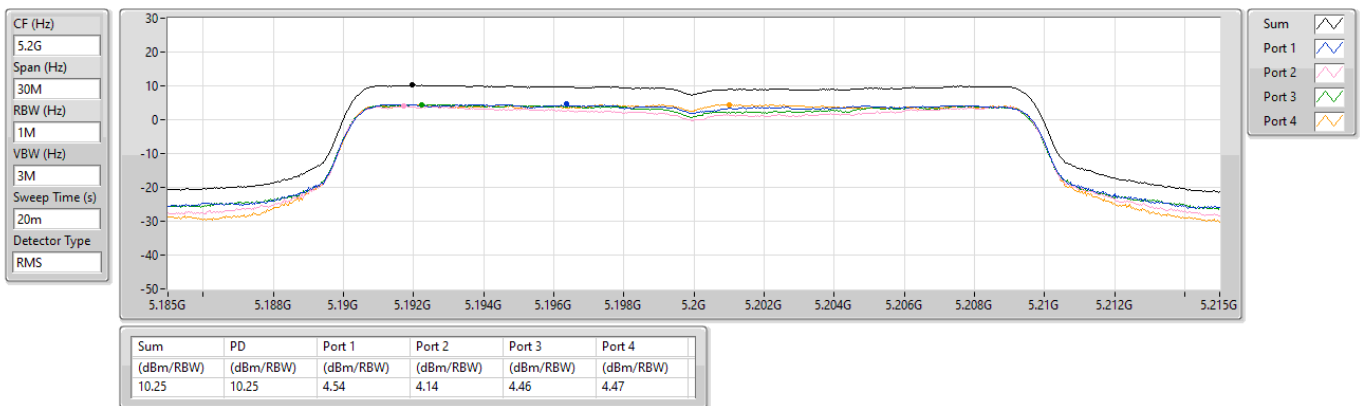




5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5240MHz

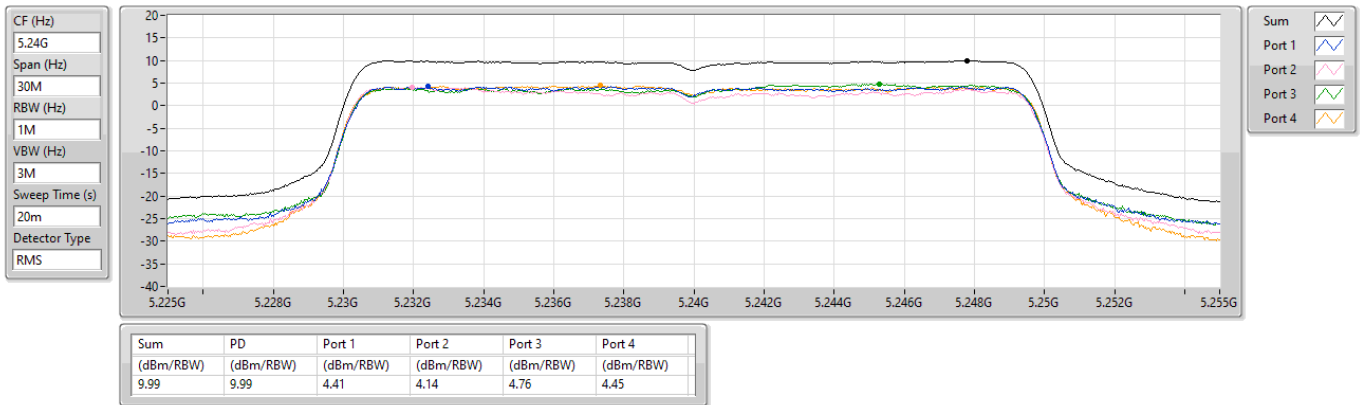

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5260MHz

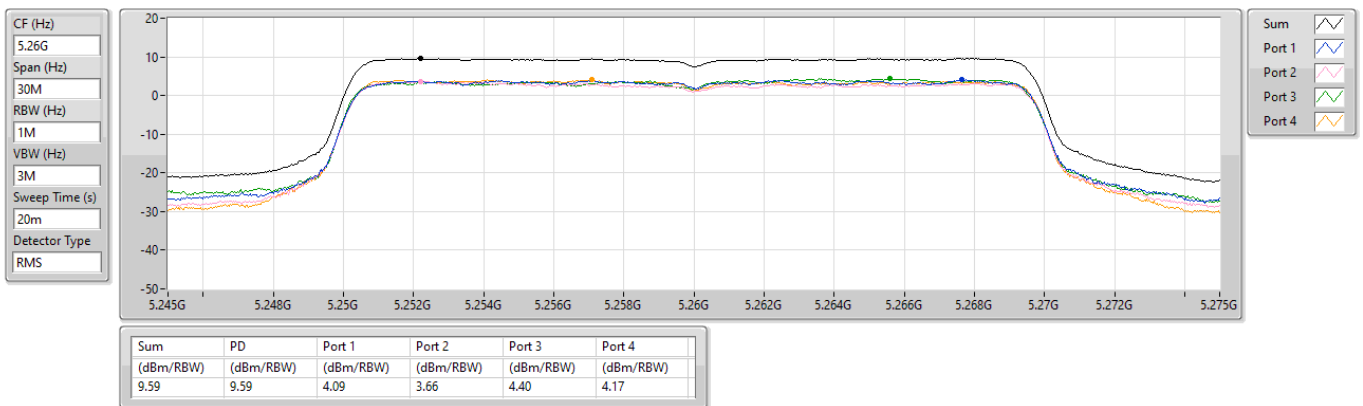




5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5300MHz

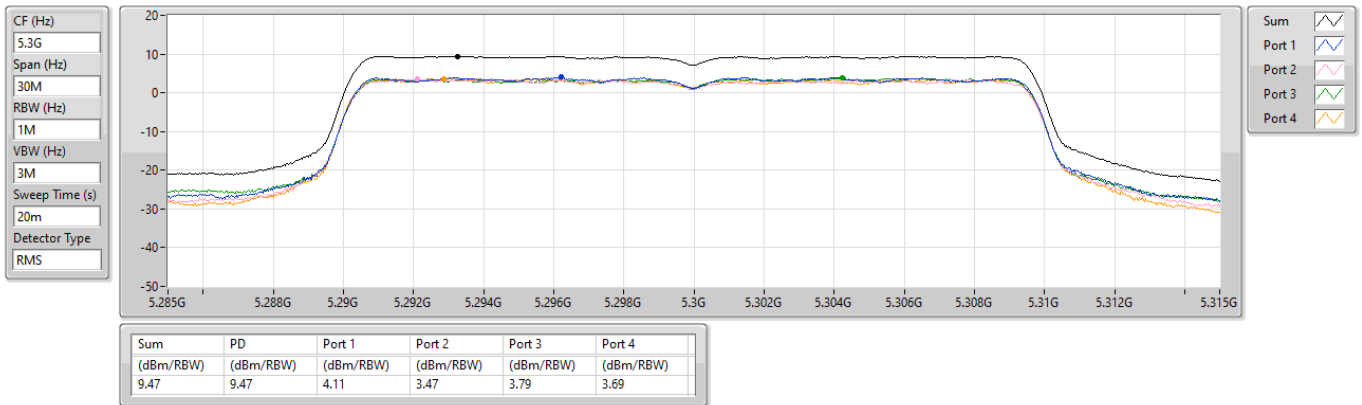

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5320MHz

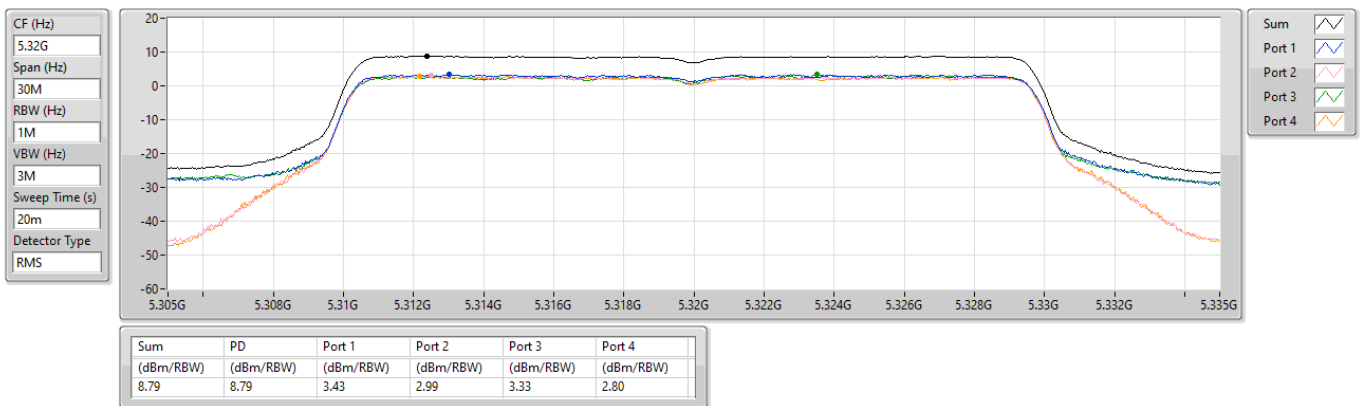




5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5500MHz

CF (Hz)
5.5G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

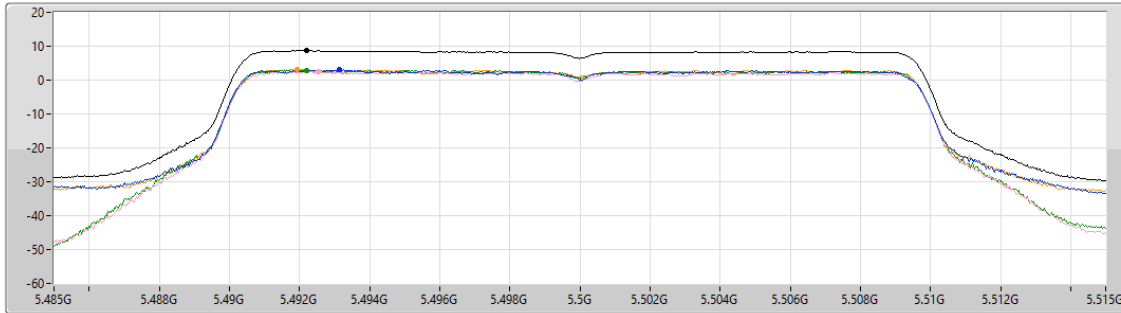


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.75	8.75	3.07	2.57	2.96	3.09

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5580MHz

CF (Hz)
5.58G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

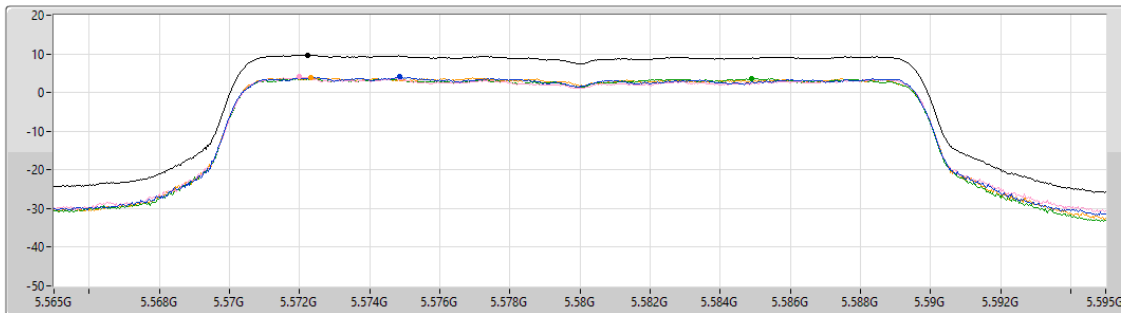


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.72	9.72	4.03	4.05	3.69	3.87



5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5700MHz

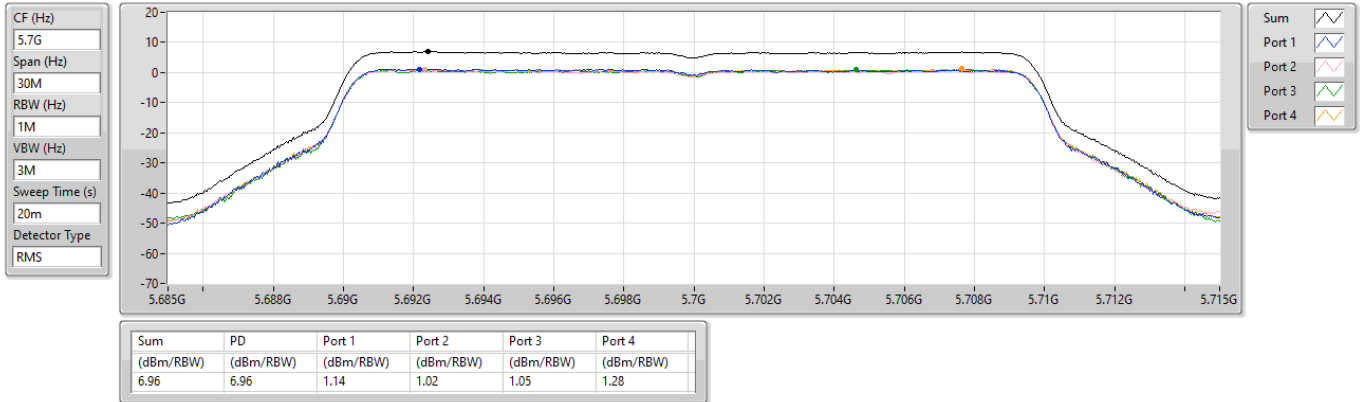

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5745MHz

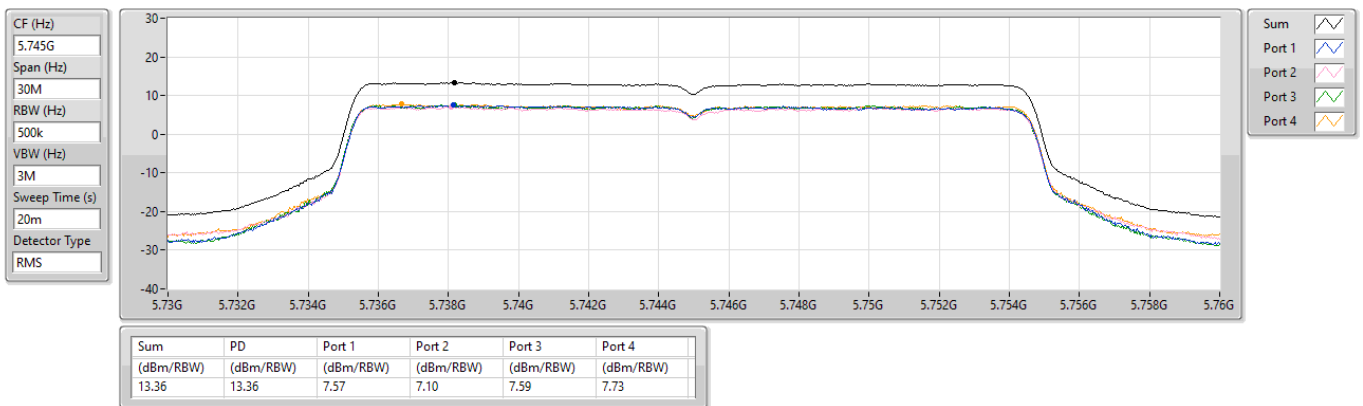




5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5785MHz

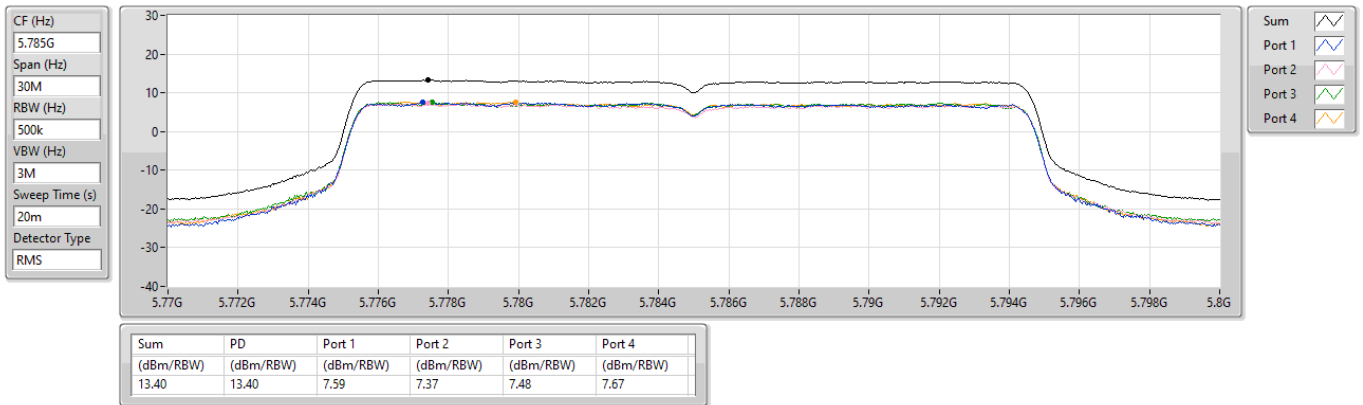

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5825MHz

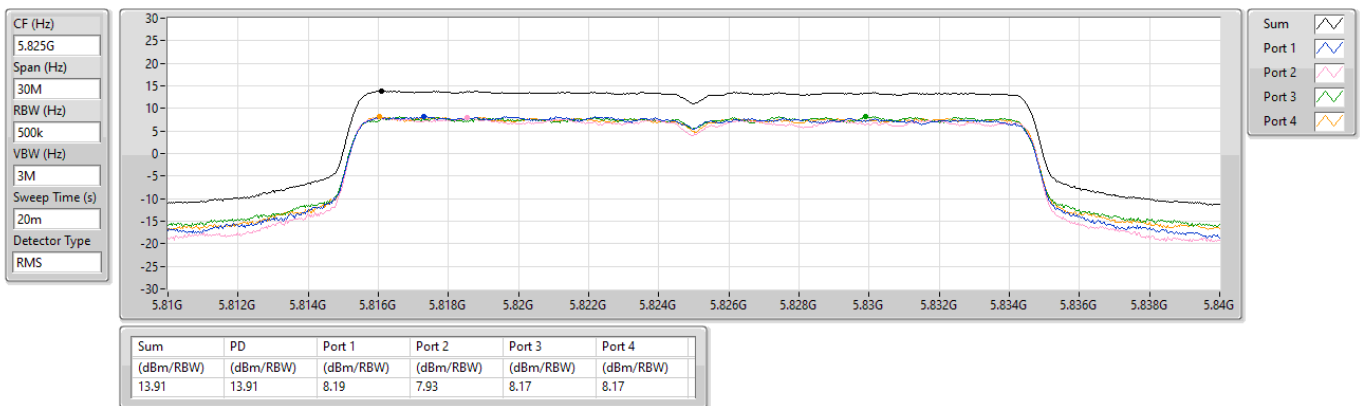

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


5190MHz

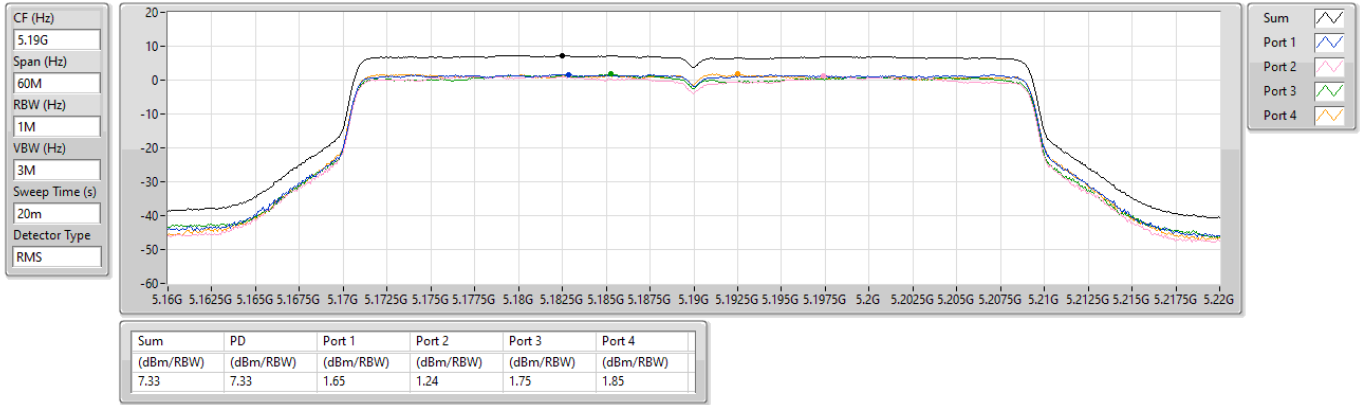

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5230MHz

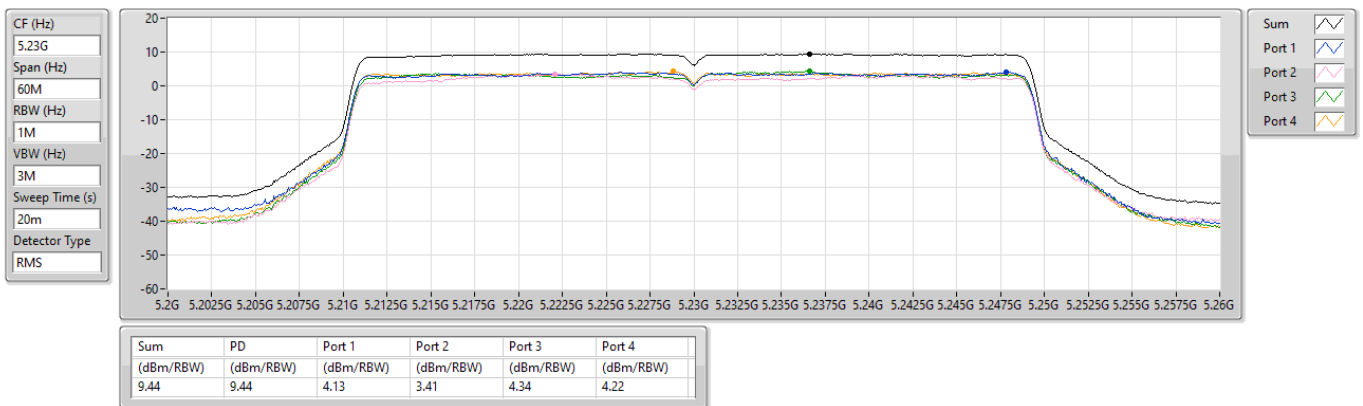




5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


5270MHz

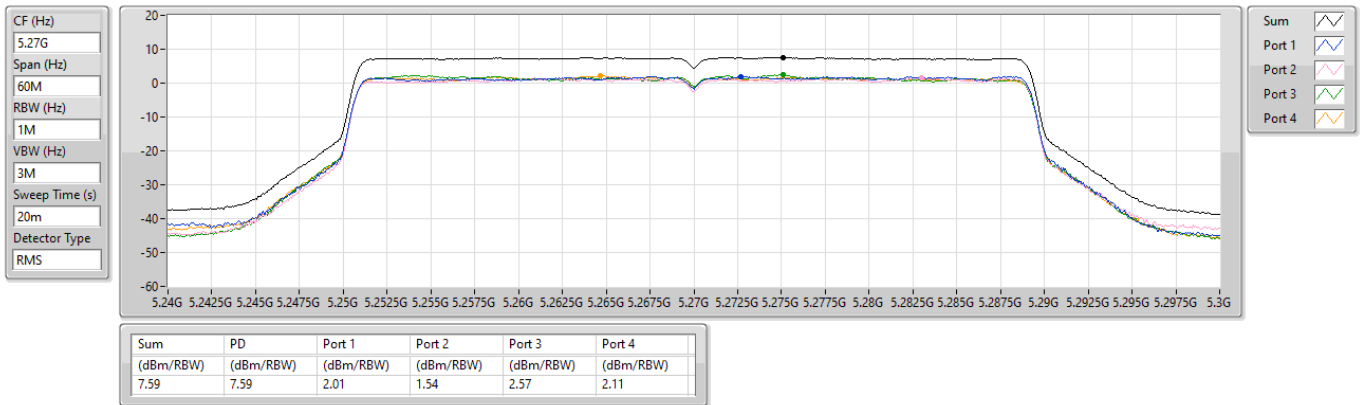

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


5310MHz

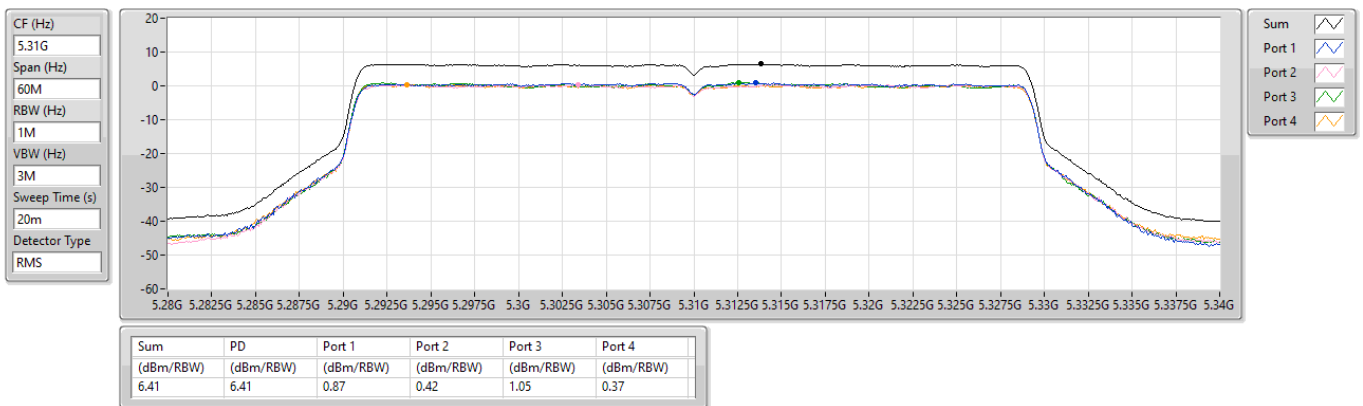

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


5510MHz

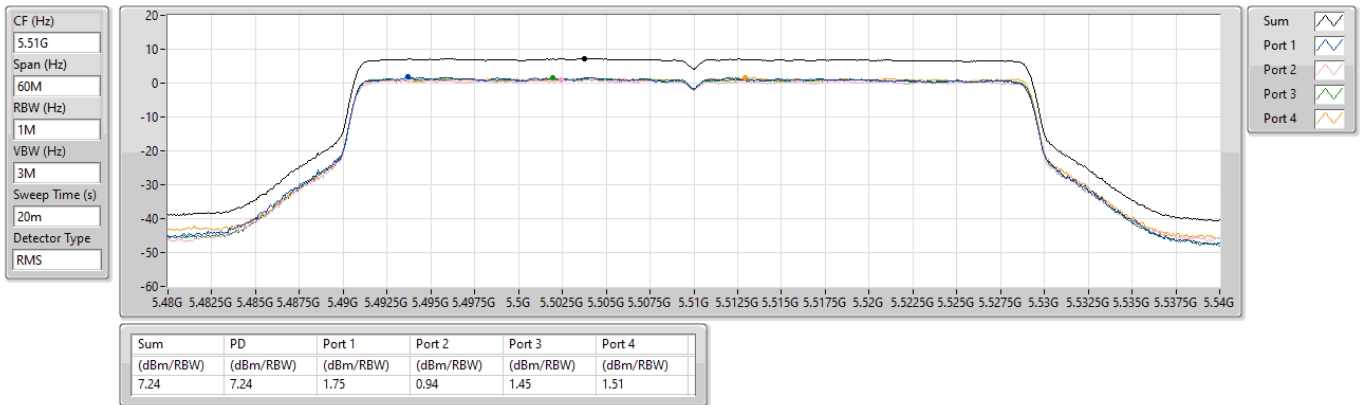

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


5590MHz

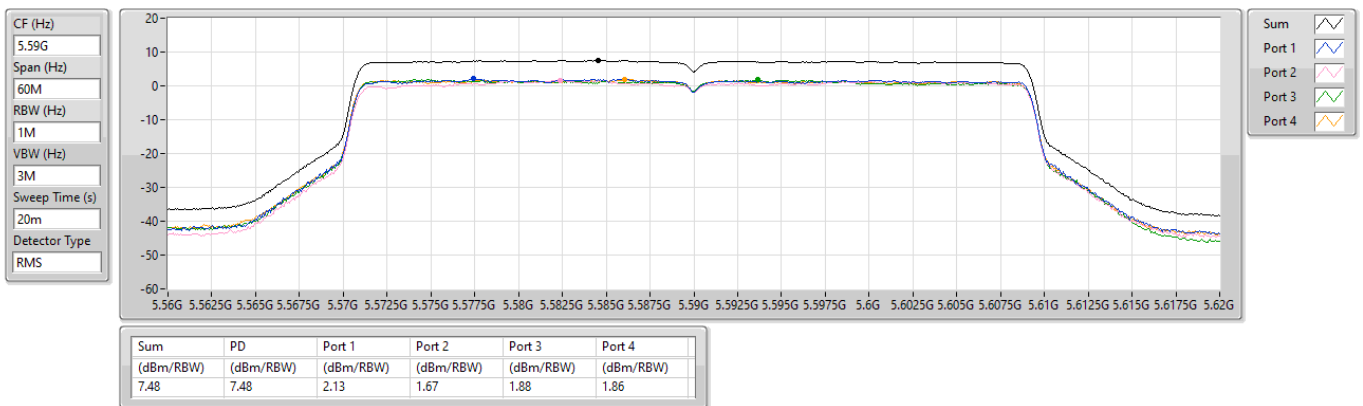

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


5670MHz

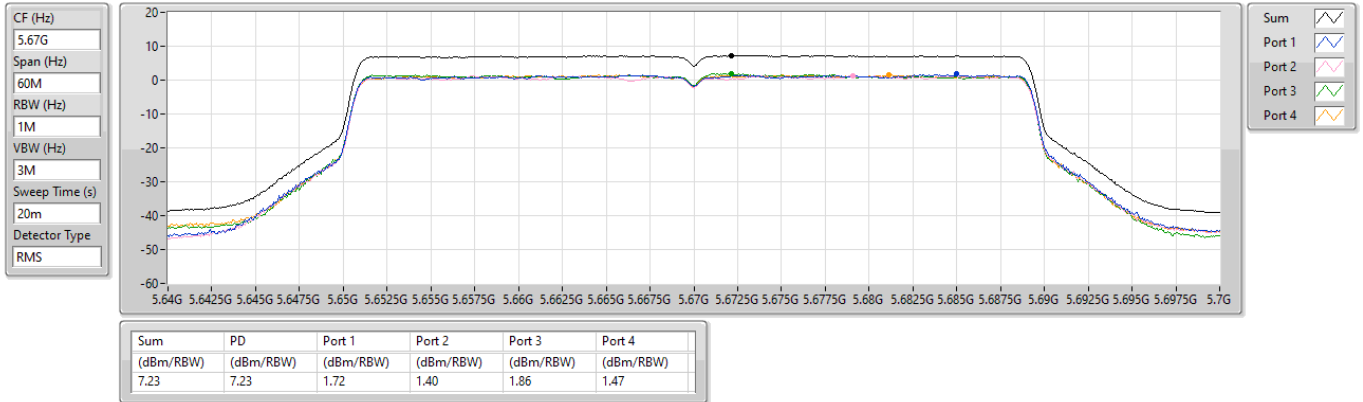

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5755MHz

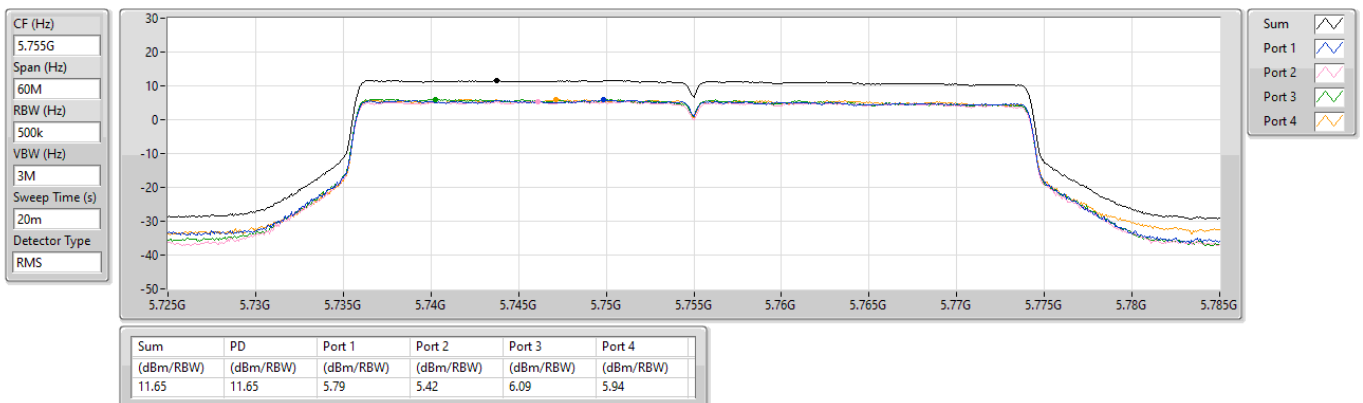




5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5795MHz

CF (Hz)
5.795G
Span (Hz)
60M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

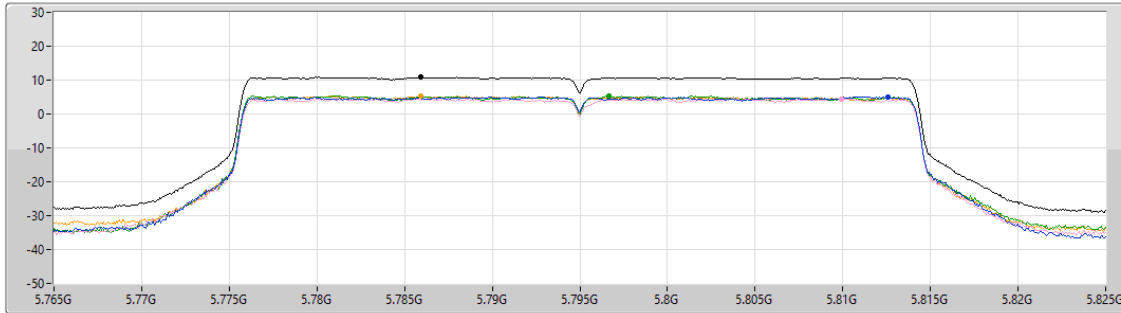

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.84	10.84	5.09	4.52	5.36	5.22

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5210MHz

CF (Hz)
5.21G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

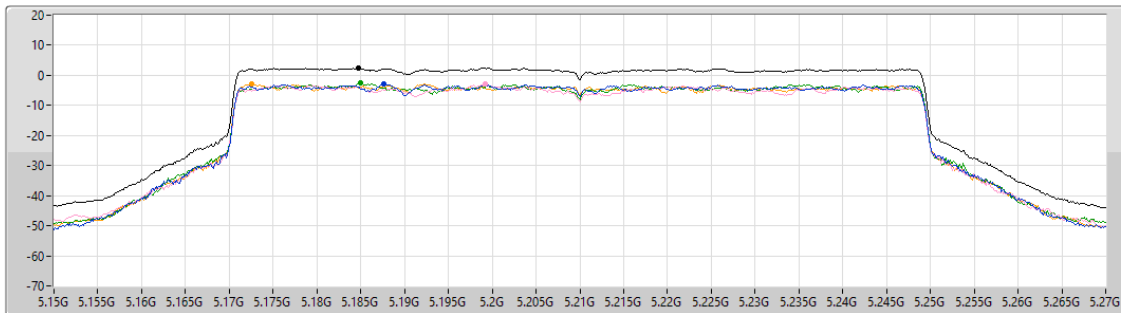

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.50	2.50	-2.93	-3.01	-2.33	-2.71



5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


5290MHz

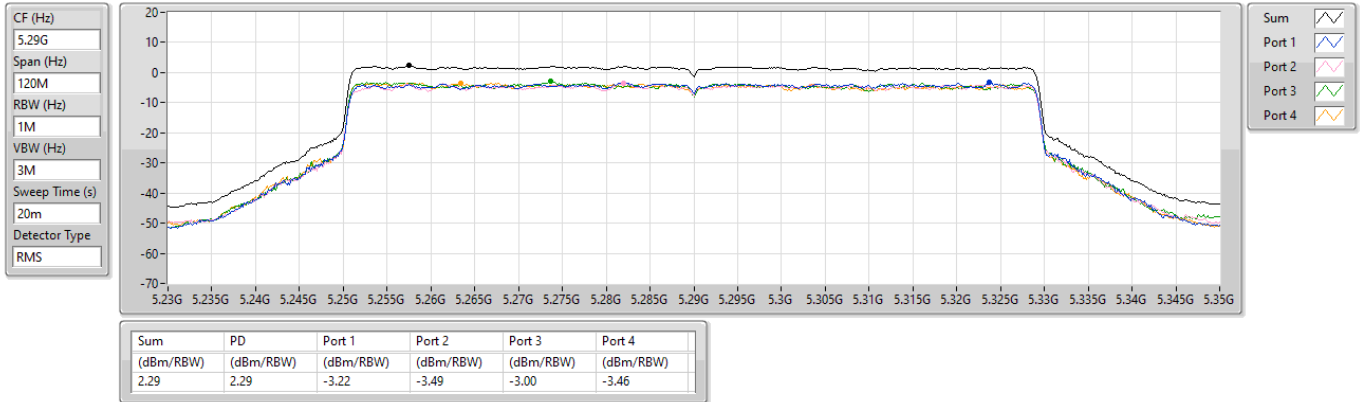

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5530MHz

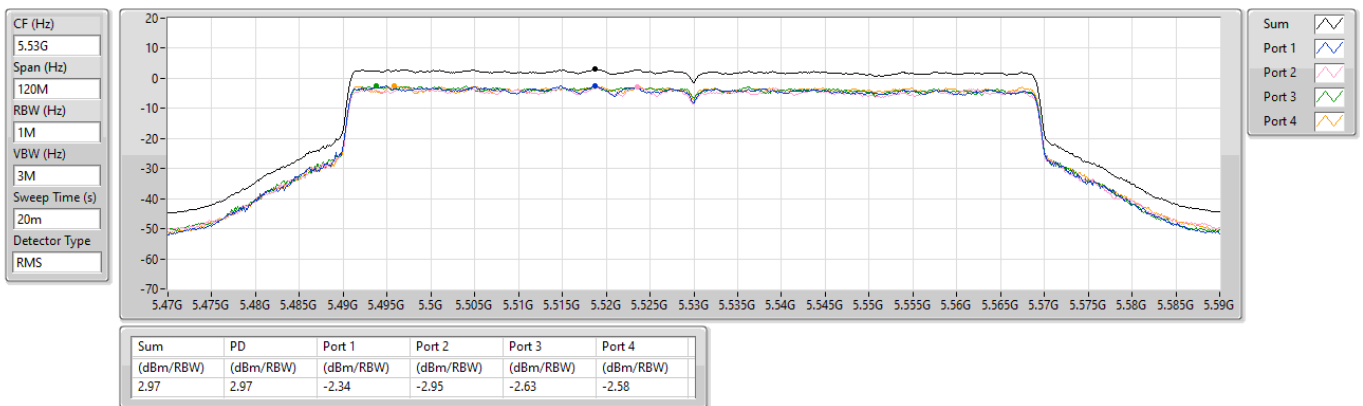




5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


5610MHz

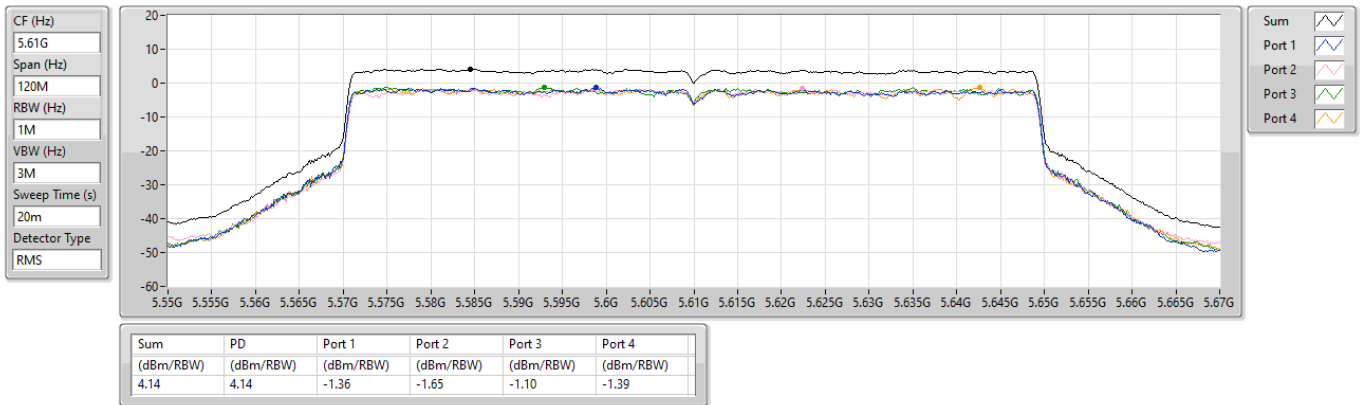

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5775MHz

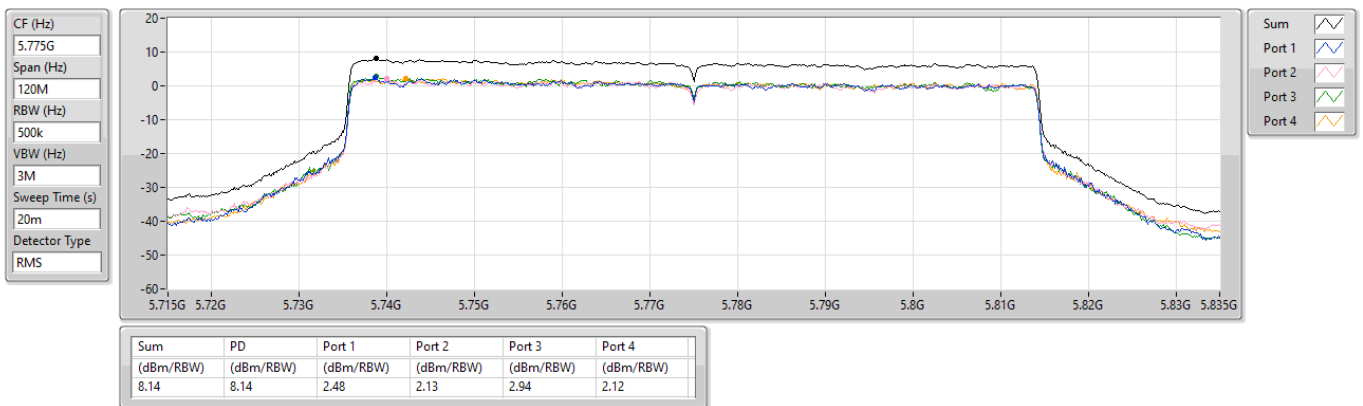




5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

5250MHz Straddle 5.15-5.25GHz

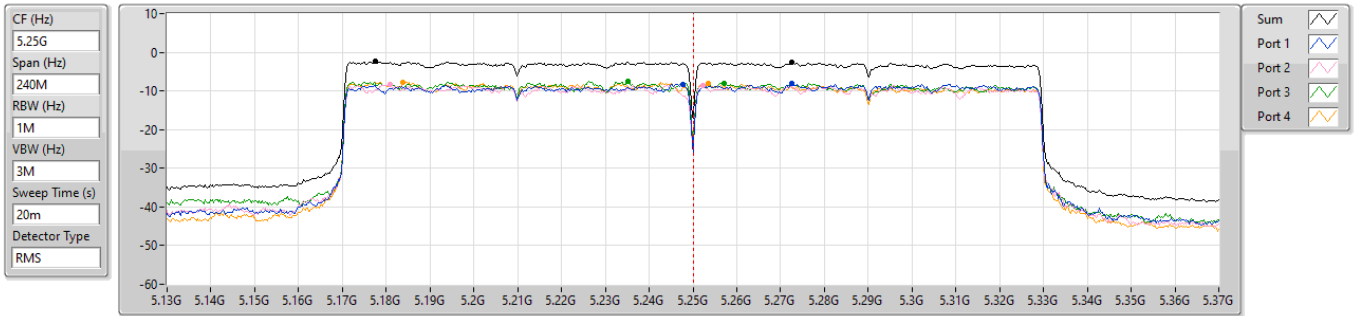

5150~5250MHz

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.43	-2.43	-8.25	-8.19	-7.58	-7.71


5250~5350MHz

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.59	-2.59	-8.17	-8.59	-7.96	-8.04

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

5570MHz

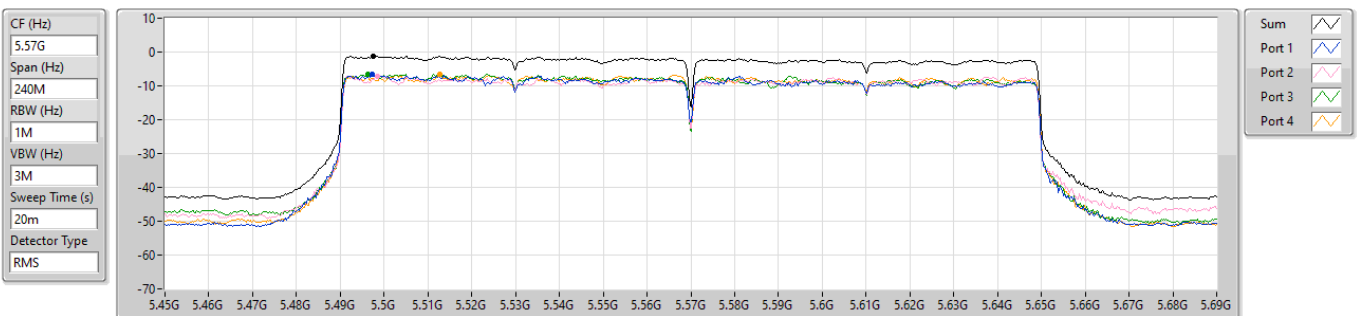

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.27	-1.27	-6.67	-7.13	-6.51	-6.61



Unwanted Emissions (Below 1GHz)

Modulation	11a	Test Freq. (MHz)	5745																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>154.16</td><td>28.36</td><td>43.50</td><td>-15.14</td><td>37.02</td><td>-8.66</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>208.48</td><td>30.30</td><td>43.50</td><td>-13.20</td><td>42.27</td><td>-11.97</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>281.23</td><td>32.36</td><td>46.00</td><td>-13.64</td><td>41.07</td><td>-8.71</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>334.58</td><td>31.80</td><td>46.00</td><td>-14.20</td><td>38.91</td><td>-7.11</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>431.58</td><td>35.92</td><td>46.00</td><td>-10.08</td><td>40.40</td><td>-4.48</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>808.91</td><td>38.06</td><td>46.00</td><td>-7.94</td><td>34.98</td><td>3.08</td><td>Peak</td><td>---</td><td>---</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	154.16	28.36	43.50	-15.14	37.02	-8.66	Peak	---	---	2	208.48	30.30	43.50	-13.20	42.27	-11.97	Peak	---	---	3	281.23	32.36	46.00	-13.64	41.07	-8.71	Peak	---	---	4	334.58	31.80	46.00	-14.20	38.91	-7.11	Peak	---	---	5	431.58	35.92	46.00	-10.08	40.40	-4.48	Peak	---	---	6	808.91	38.06	46.00	-7.94	34.98	3.08	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	154.16	28.36	43.50	-15.14	37.02	-8.66	Peak	---	---																																																																
2	208.48	30.30	43.50	-13.20	42.27	-11.97	Peak	---	---																																																																
3	281.23	32.36	46.00	-13.64	41.07	-8.71	Peak	---	---																																																																
4	334.58	31.80	46.00	-14.20	38.91	-7.11	Peak	---	---																																																																
5	431.58	35.92	46.00	-10.08	40.40	-4.48	Peak	---	---																																																																
6	808.91	38.06	46.00	-7.94	34.98	3.08	Peak	---	---																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									



Modulation	11a	Test Freq. (MHz)	5745																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):65																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>45.52</td><td>35.23</td><td>40.00</td><td>-4.77</td><td>44.02</td><td>-8.79</td><td>QP</td><td>100</td><td>87</td></tr><tr><td>2</td><td>66.86</td><td>35.33</td><td>40.00</td><td>-4.67</td><td>46.05</td><td>-10.72</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>147.37</td><td>34.57</td><td>43.50</td><td>-8.93</td><td>43.24</td><td>-8.67</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>212.36</td><td>33.04</td><td>43.50</td><td>-10.46</td><td>45.05</td><td>-12.01</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>272.50</td><td>32.49</td><td>46.00</td><td>-13.51</td><td>41.53</td><td>-9.04</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>452.92</td><td>36.58</td><td>46.00</td><td>-9.42</td><td>40.36</td><td>-3.78</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	45.52	35.23	40.00	-4.77	44.02	-8.79	QP	100	87	2	66.86	35.33	40.00	-4.67	46.05	-10.72	Peak	---	---	3	147.37	34.57	43.50	-8.93	43.24	-8.67	Peak	---	---	4	212.36	33.04	43.50	-10.46	45.05	-12.01	Peak	---	---	5	272.50	32.49	46.00	-13.51	41.53	-9.04	Peak	---	---	6	452.92	36.58	46.00	-9.42	40.36	-3.78	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	45.52	35.23	40.00	-4.77	44.02	-8.79	QP	100	87																																																																
2	66.86	35.33	40.00	-4.67	46.05	-10.72	Peak	---	---																																																																
3	147.37	34.57	43.50	-8.93	43.24	-8.67	Peak	---	---																																																																
4	212.36	33.04	43.50	-10.46	45.05	-12.01	Peak	---	---																																																																
5	272.50	32.49	46.00	-13.51	41.53	-9.04	Peak	---	---																																																																
6	452.92	36.58	46.00	-9.42	40.36	-3.78	Peak	---	---																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									



Unwanted Emissions (Above 1GHz)

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64			
Level (dBUV/m)			



Unwanted Emissions

Appendix D

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			



Modulation	11a	Test Freq. (MHz)	5200
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):25 Humidity(%):65			
Level (dBuV/m)			



Modulation	11a	Test Freq. (MHz)	5200
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):25 Humidity(%):65			
Level (dBuV/m) </			



Unwanted Emissions

Appendix D

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):25 Humidity(%):65			
Level (dBuV/m) <			



Unwanted Emissions

Appendix D

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):25 Humidity(%):65			
Level (dBuV/m)			



Modulation	11a	Test Freq. (MHz)	5260
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):25 Humidity(%):65			
Level (dBuV/m)			



Modulation	11a	Test Freq. (MHz)	5260
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):25 Humidity(%):65			
Level (dBuV/m) <			



Unwanted Emissions

Appendix D

Modulation	11a	Test Freq. (MHz)	5300
Polarization	Horizontal		
Test By :Akun Chung Temperature(°C):25 Humidity(%):65			
Level (dBuV/m) </			



Modulation	11a	Test Freq. (MHz)	5300																																																		
Polarization	Vertical																																																				
Test By :Akun Chung Temperature(°C):25 Humidity(%):65																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10600.00</td><td>53.88</td><td>54.00</td><td>-0.12</td><td>44.72</td><td>9.16</td><td>Average</td><td>229</td><td>76</td></tr><tr><td>2</td><td>10600.00</td><td>65.08</td><td>74.00</td><td>-8.92</td><td>55.92</td><td>9.16</td><td>Peak</td><td>229</td><td>76</td></tr><tr><td>3</td><td>15900.00</td><td>36.17</td><td>54.00</td><td>-17.83</td><td>29.45</td><td>6.72</td><td>Average</td><td>100</td><td>119</td></tr><tr><td>4</td><td>15900.00</td><td>50.53</td><td>74.00</td><td>-23.47</td><td>43.81</td><td>6.72</td><td>Peak</td><td>100</td><td>119</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10600.00	53.88	54.00	-0.12	44.72	9.16	Average	229	76	2	10600.00	65.08	74.00	-8.92	55.92	9.16	Peak	229	76	3	15900.00	36.17	54.00	-17.83	29.45	6.72	Average	100	119	4	15900.00	50.53	74.00	-23.47	43.81	6.72	Peak	100	119
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	10600.00	53.88	54.00	-0.12	44.72	9.16	Average	229	76																																												
2	10600.00	65.08	74.00	-8.92	55.92	9.16	Peak	229	76																																												
3	15900.00	36.17	54.00	-17.83	29.45	6.72	Average	100	119																																												
4	15900.00	50.53	74.00	-23.47	43.81	6.72	Peak	100	119																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					




Modulation	11a	Test Freq. (MHz)	5320																																																												
Polarization	Horizontal																																																														
Test By :Akun Chung Temperature(°C):25 Humidity(%):65																																																															
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10640.00</td><td>49.48</td><td>54.00</td><td>-4.52</td><td>40.32</td><td>9.16</td><td>Average</td><td>205</td><td>336</td></tr><tr><td>2</td><td>10640.00</td><td>62.86</td><td>74.00</td><td>-11.14</td><td>53.70</td><td>9.16</td><td>Peak</td><td>205</td><td>336</td></tr><tr><td>3</td><td>15960.00</td><td>35.62</td><td>54.00</td><td>-18.38</td><td>29.17</td><td>6.45</td><td>Average</td><td>187</td><td>83</td></tr><tr><td>4</td><td>15960.00</td><td>49.69</td><td>74.00</td><td>-24.31</td><td>43.24</td><td>6.45</td><td>Peak</td><td>187</td><td>83</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	10640.00	49.48	54.00	-4.52	40.32	9.16	Average	205	336	2	10640.00	62.86	74.00	-11.14	53.70	9.16	Peak	205	336	3	15960.00	35.62	54.00	-18.38	29.17	6.45	Average	187	83	4	15960.00	49.69	74.00	-24.31	43.24	6.45	Peak	187	83
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																						
1	10640.00	49.48	54.00	-4.52	40.32	9.16	Average	205	336																																																						
2	10640.00	62.86	74.00	-11.14	53.70	9.16	Peak	205	336																																																						
3	15960.00	35.62	54.00	-18.38	29.17	6.45	Average	187	83																																																						
4	15960.00	49.69	74.00	-24.31	43.24	6.45	Peak	187	83																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															




Modulation	11a	Test Freq. (MHz)	5320																																																		
Polarization	Vertical																																																				
Test By :Akun Chung Temperature(°C):25 Humidity(%):65																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10640.00</td><td>52.53</td><td>54.00</td><td>-1.47</td><td>43.37</td><td>9.16</td><td>Average</td><td>218</td><td>265</td></tr><tr><td>2</td><td>10640.00</td><td>64.76</td><td>74.00</td><td>-9.24</td><td>55.60</td><td>9.16</td><td>Peak</td><td>218</td><td>265</td></tr><tr><td>3</td><td>15960.00</td><td>35.49</td><td>54.00</td><td>-18.51</td><td>29.04</td><td>6.45</td><td>Average</td><td>100</td><td>305</td></tr><tr><td>4</td><td>15960.00</td><td>49.63</td><td>74.00</td><td>-24.37</td><td>43.18</td><td>6.45</td><td>Peak</td><td>100</td><td>305</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10640.00	52.53	54.00	-1.47	43.37	9.16	Average	218	265	2	10640.00	64.76	74.00	-9.24	55.60	9.16	Peak	218	265	3	15960.00	35.49	54.00	-18.51	29.04	6.45	Average	100	305	4	15960.00	49.63	74.00	-24.37	43.18	6.45	Peak	100	305
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	10640.00	52.53	54.00	-1.47	43.37	9.16	Average	218	265																																												
2	10640.00	64.76	74.00	-9.24	55.60	9.16	Peak	218	265																																												
3	15960.00	35.49	54.00	-18.51	29.04	6.45	Average	100	305																																												
4	15960.00	49.63	74.00	-24.37	43.18	6.45	Peak	100	305																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					

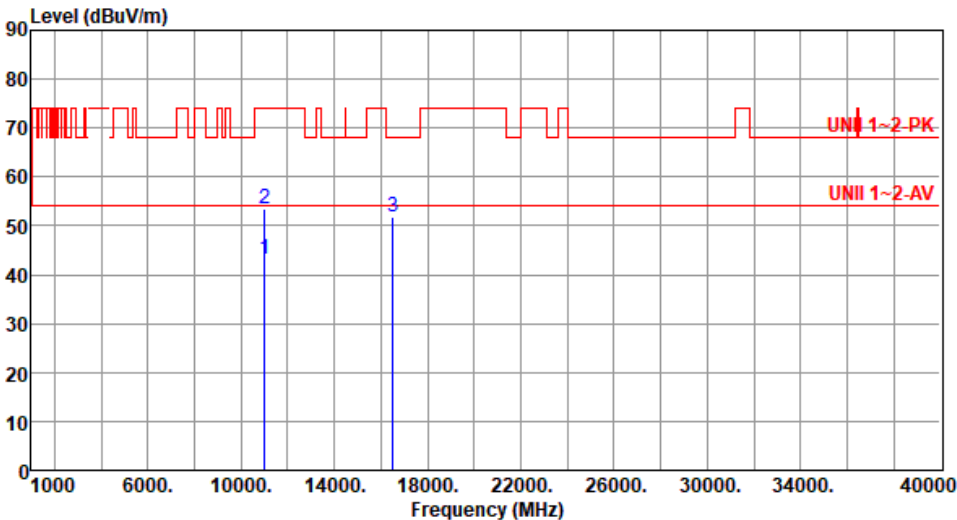

Modulation	11a	Test Freq. (MHz)	5500																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung Temperature(°C):25 Humidity(%):65																																																					
Level (dBuV/m)  <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11000.00</td><td>43.12</td><td>54.00</td><td>-10.88</td><td>33.55</td><td>9.57</td><td>Average</td><td>305</td><td>205</td></tr><tr><td>2</td><td>11000.00</td><td>53.45</td><td>74.00</td><td>-20.55</td><td>43.88</td><td>9.57</td><td>Peak</td><td>305</td><td>205</td></tr><tr><td>3</td><td>16500.00</td><td>51.84</td><td>68.20</td><td>-16.36</td><td>42.77</td><td>9.07</td><td>Peak</td><td>100</td><td>203</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	11000.00	43.12	54.00	-10.88	33.55	9.57	Average	305	205	2	11000.00	53.45	74.00	-20.55	43.88	9.57	Peak	305	205	3	16500.00	51.84	68.20	-16.36	42.77	9.07	Peak	100	203
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																												
1	11000.00	43.12	54.00	-10.88	33.55	9.57	Average	305	205																																												
2	11000.00	53.45	74.00	-20.55	43.88	9.57	Peak	305	205																																												
3	16500.00	51.84	68.20	-16.36	42.77	9.07	Peak	100	203																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					

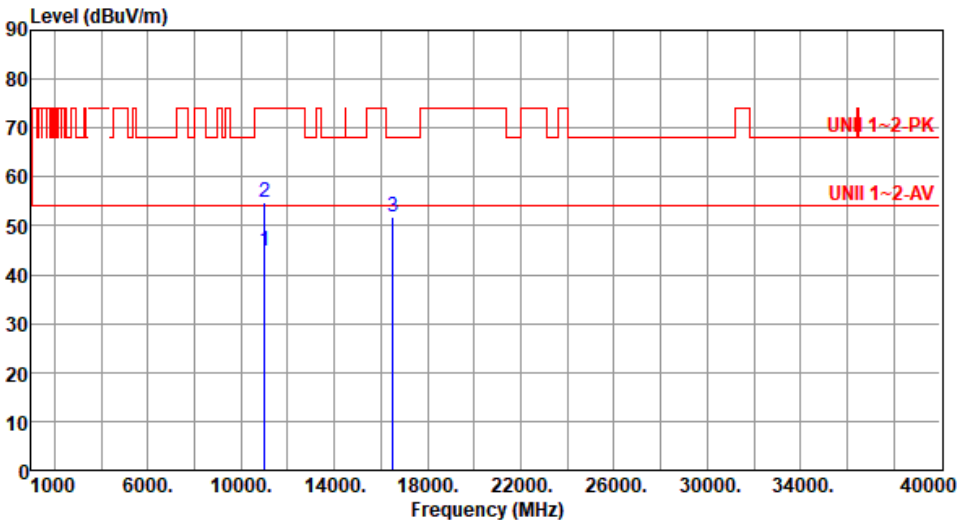

Modulation	11a	Test Freq. (MHz)	5500																																								
Polarization	Vertical																																										
Test By :Akun Chung Temperature(°C):25 Humidity(%):65																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11000.00</td><td>44.67</td><td>54.00</td><td>-9.33</td><td>35.10</td><td>9.57</td><td>Average</td><td>230</td><td>215</td></tr><tr><td>2</td><td>11000.00</td><td>54.77</td><td>74.00</td><td>-19.23</td><td>45.20</td><td>9.57</td><td>Peak</td><td>230</td><td>215</td></tr><tr><td>3</td><td>16500.00</td><td>51.93</td><td>68.20</td><td>-16.27</td><td>42.86</td><td>9.07</td><td>Peak</td><td>100</td><td>198</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11000.00	44.67	54.00	-9.33	35.10	9.57	Average	230	215	2	11000.00	54.77	74.00	-19.23	45.20	9.57	Peak	230	215	3	16500.00	51.93	68.20	-16.27	42.86	9.07	Peak	100	198
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11000.00	44.67	54.00	-9.33	35.10	9.57	Average	230	215																																		
2	11000.00	54.77	74.00	-19.23	45.20	9.57	Peak	230	215																																		
3	16500.00	51.93	68.20	-16.27	42.86	9.07	Peak	100	198																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	11a	Test Freq. (MHz)	5580																																								
Polarization	Horizontal																																										
Test By :Akun Chung Temperature(°C):25 Humidity(%):65																																											
Level (dBuV/m) UNI 1~2-PK UNI 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11160.00</td><td>40.29</td><td>54.00</td><td>-13.71</td><td>31.40</td><td>8.89</td><td>Average</td><td>313</td><td>211</td></tr><tr><td>2</td><td>11160.00</td><td>54.73</td><td>74.00</td><td>-19.27</td><td>45.84</td><td>8.89</td><td>Peak</td><td>313</td><td>211</td></tr><tr><td>3</td><td>16740.00</td><td>54.91</td><td>68.20</td><td>-13.29</td><td>45.45</td><td>9.46</td><td>Peak</td><td>100</td><td>206</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11160.00	40.29	54.00	-13.71	31.40	8.89	Average	313	211	2	11160.00	54.73	74.00	-19.27	45.84	8.89	Peak	313	211	3	16740.00	54.91	68.20	-13.29	45.45	9.46	Peak	100	206
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11160.00	40.29	54.00	-13.71	31.40	8.89	Average	313	211																																		
2	11160.00	54.73	74.00	-19.27	45.84	8.89	Peak	313	211																																		
3	16740.00	54.91	68.20	-13.29	45.45	9.46	Peak	100	206																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											




Modulation	11a	Test Freq. (MHz)	5580
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):25 Humidity(%):65			
Level (dBuV/m) <			



Unwanted Emissions

Appendix D

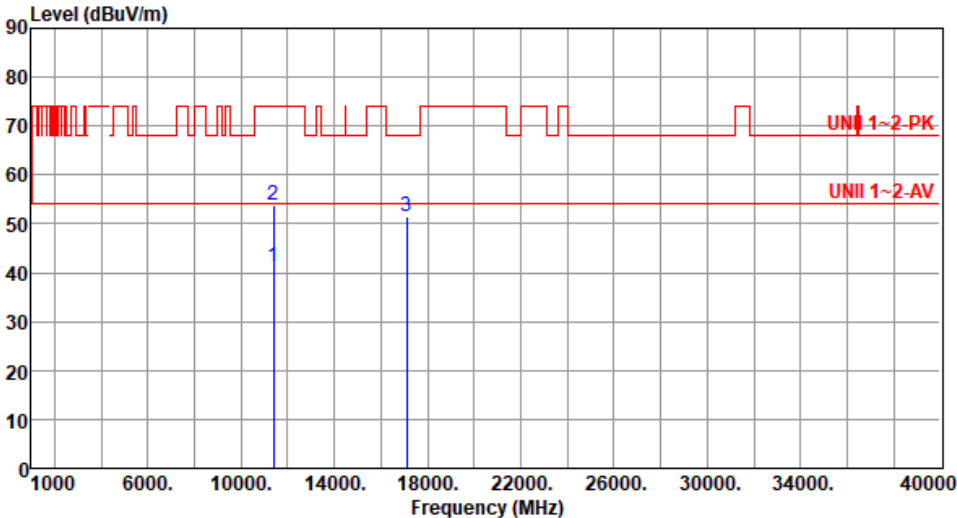Modulation	11a	Test Freq. (MHz)	5700						
Polarization	Horizontal								
Test By :Akun Chung Temperature(°C):25 Humidity(%):65									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	11400.00	41.03	54.00	-12.97	31.80	9.23	Average	311	207
2	11400.00	53.78	74.00	-20.22	44.55	9.23	Peak	311	207
3	17100.00	51.64	68.20	-16.56	42.48	9.16	Peak	100	204

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5700
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):25 Humidity(%):65			
Level (dBuV/m) <			



Unwanted Emissions

Appendix D

Modulation	11a	Test Freq. (MHz)	5745																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung Temperature(°C):25 Humidity(%):65																																	
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11490.00</td><td>62.24</td><td>74.00</td><td>-11.76</td><td>52.79</td><td>9.45</td><td>Peak</td><td>243</td><td>203</td></tr><tr><td>2</td><td>17235.00</td><td>53.41</td><td>68.20</td><td>-14.79</td><td>44.31</td><td>9.10</td><td>Peak</td><td>100</td><td>294</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11490.00	62.24	74.00	-11.76	52.79	9.45	Peak	243	203	2	17235.00	53.41	68.20	-14.79	44.31	9.10	Peak	100	294
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	11490.00	62.24	74.00	-11.76	52.79	9.45	Peak	243	203																								
2	17235.00	53.41	68.20	-14.79	44.31	9.10	Peak	100	294																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Unwanted Emissions

Appendix D

Modulation	11a	Test Freq. (MHz)	5745
Polarization	Horizontal-Average		
Test By :Akun Chung Temperature(°C):25 Humidity(%):65			
Level (dBuV/m)			



Unwanted Emissions

Appendix D

Modulation	11a	Test Freq. (MHz)	5745																																																		
Polarization	Vertical-Peak																																																				
Test By :Akun Chung Temperature(°C):25 Humidity(%):65																																																					
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11490.00</td><td>68.95</td><td>74.00</td><td>-5.05</td><td>59.50</td><td>9.45</td><td>Peak</td><td>303</td><td>264</td></tr><tr><td>2</td><td>17235.00</td><td>53.92</td><td>68.20</td><td>-14.28</td><td>44.82</td><td>9.10</td><td>Peak</td><td>100</td><td>267</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table						dBuV			cm	deg	1	11490.00	68.95	74.00	-5.05	59.50	9.45	Peak	303	264	2	17235.00	53.92	68.20	-14.28	44.82	9.10	Peak	100	267
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
					dBuV			cm	deg																																												
1	11490.00	68.95	74.00	-5.05	59.50	9.45	Peak	303	264																																												
2	17235.00	53.92	68.20	-14.28	44.82	9.10	Peak	100	267																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					




Unwanted Emissions


Appendix D

Modulation	11a	Test Freq. (MHz)	5745
Polarization	Vertical-Average		
Test By :Akun Chung Temperature(°C):25 Humidity(%):65			
Level (dBUV/m)			

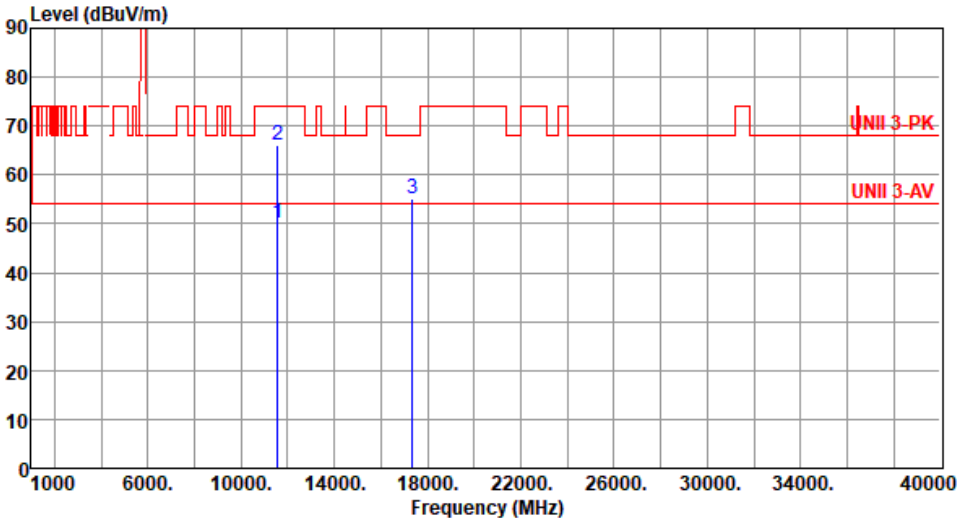


Modulation	11a	Test Freq. (MHz)	5785																																								
Polarization	Horizontal																																										
Test By :Akun Chung Temperature(°C):25 Humidity(%):65																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11570.00</td><td>50.04</td><td>54.00</td><td>-3.96</td><td>40.80</td><td>9.24</td><td>Average</td><td>312</td><td>222</td></tr><tr><td>2</td><td>11570.00</td><td>66.14</td><td>74.00</td><td>-7.86</td><td>56.90</td><td>9.24</td><td>Peak</td><td>312</td><td>222</td></tr><tr><td>3</td><td>17355.00</td><td>55.09</td><td>68.20</td><td>-13.11</td><td>45.91</td><td>9.18</td><td>Peak</td><td>310</td><td>236</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11570.00	50.04	54.00	-3.96	40.80	9.24	Average	312	222	2	11570.00	66.14	74.00	-7.86	56.90	9.24	Peak	312	222	3	17355.00	55.09	68.20	-13.11	45.91	9.18	Peak	310	236
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11570.00	50.04	54.00	-3.96	40.80	9.24	Average	312	222																																		
2	11570.00	66.14	74.00	-7.86	56.90	9.24	Peak	312	222																																		
3	17355.00	55.09	68.20	-13.11	45.91	9.18	Peak	310	236																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											

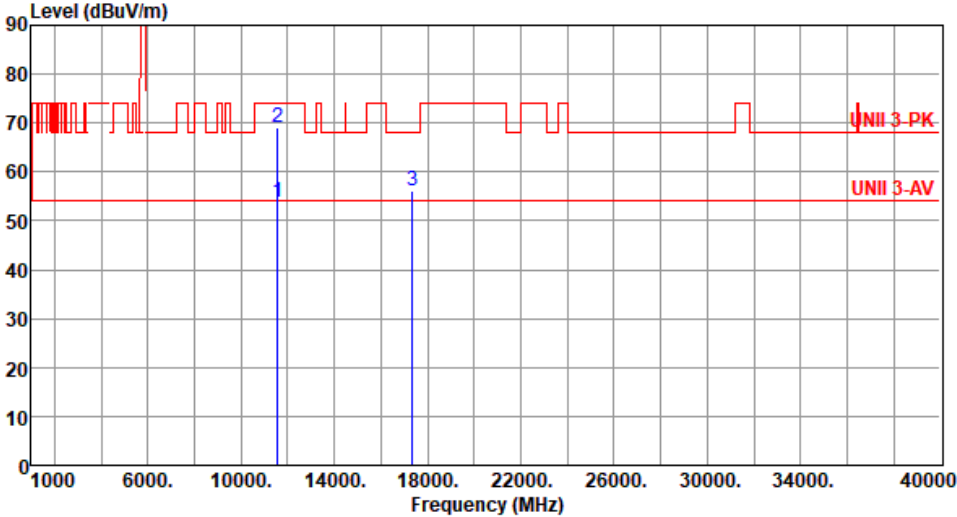


Modulation	11a	Test Freq. (MHz)	5785																																								
Polarization	Vertical																																										
Test By :Akun Chung Temperature(°C):25 Humidity(%):65																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11570.00</td><td>53.88</td><td>54.00</td><td>-0.12</td><td>44.64</td><td>9.24</td><td>Average</td><td>236</td><td>263</td></tr><tr><td>2</td><td>11570.00</td><td>69.09</td><td>74.00</td><td>-4.91</td><td>59.85</td><td>9.24</td><td>Peak</td><td>236</td><td>263</td></tr><tr><td>3</td><td>17355.00</td><td>55.99</td><td>68.20</td><td>-12.21</td><td>46.81</td><td>9.18</td><td>Peak</td><td>215</td><td>338</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11570.00	53.88	54.00	-0.12	44.64	9.24	Average	236	263	2	11570.00	69.09	74.00	-4.91	59.85	9.24	Peak	236	263	3	17355.00	55.99	68.20	-12.21	46.81	9.18	Peak	215	338
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11570.00	53.88	54.00	-0.12	44.64	9.24	Average	236	263																																		
2	11570.00	69.09	74.00	-4.91	59.85	9.24	Peak	236	263																																		
3	17355.00	55.99	68.20	-12.21	46.81	9.18	Peak	215	338																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											

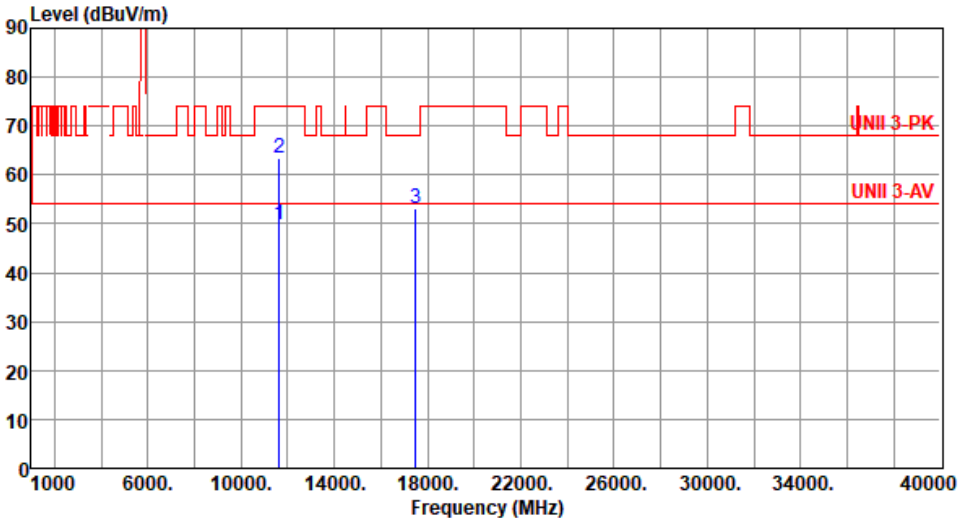

Modulation	11a	Test Freq. (MHz)	5825																																								
Polarization	Horizontal																																										
Test By :Akun Chung Temperature(°C):25 Humidity(%):65																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11650.00</td><td>49.71</td><td>54.00</td><td>-4.29</td><td>40.77</td><td>8.94</td><td>Average</td><td>142</td><td>161</td></tr><tr><td>2</td><td>11650.00</td><td>63.28</td><td>74.00</td><td>-10.72</td><td>54.34</td><td>8.94</td><td>Peak</td><td>142</td><td>161</td></tr><tr><td>3</td><td>17475.00</td><td>53.18</td><td>68.20</td><td>-15.02</td><td>43.71</td><td>9.47</td><td>Peak</td><td>100</td><td>275</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11650.00	49.71	54.00	-4.29	40.77	8.94	Average	142	161	2	11650.00	63.28	74.00	-10.72	54.34	8.94	Peak	142	161	3	17475.00	53.18	68.20	-15.02	43.71	9.47	Peak	100	275
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11650.00	49.71	54.00	-4.29	40.77	8.94	Average	142	161																																		
2	11650.00	63.28	74.00	-10.72	54.34	8.94	Peak	142	161																																		
3	17475.00	53.18	68.20	-15.02	43.71	9.47	Peak	100	275																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											

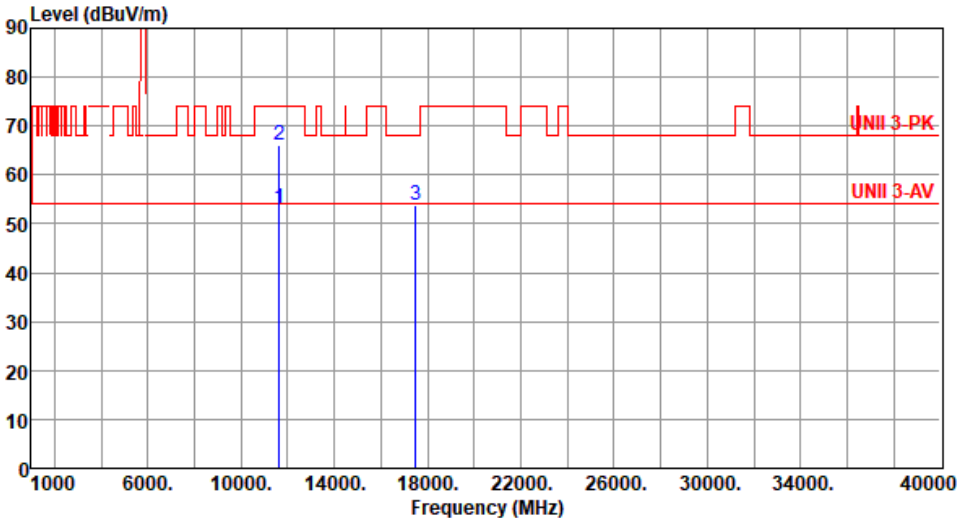

Modulation	11a	Test Freq. (MHz)	5825																																								
Polarization	Vertical																																										
Test By :Akun Chung Temperature(°C):25 Humidity(%):65																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11650.00</td><td>53.11</td><td>54.00</td><td>-0.89</td><td>44.17</td><td>8.94</td><td>Average</td><td>224</td><td>286</td></tr><tr><td>2</td><td>11650.00</td><td>66.05</td><td>74.00</td><td>-7.95</td><td>57.11</td><td>8.94</td><td>Peak</td><td>224</td><td>286</td></tr><tr><td>3</td><td>17475.00</td><td>53.79</td><td>68.20</td><td>-14.41</td><td>44.32</td><td>9.47</td><td>Peak</td><td>100</td><td>282</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11650.00	53.11	54.00	-0.89	44.17	8.94	Average	224	286	2	11650.00	66.05	74.00	-7.95	57.11	8.94	Peak	224	286	3	17475.00	53.79	68.20	-14.41	44.32	9.47	Peak	100	282
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11650.00	53.11	54.00	-0.89	44.17	8.94	Average	224	286																																		
2	11650.00	66.05	74.00	-7.95	57.11	8.94	Peak	224	286																																		
3	17475.00	53.79	68.20	-14.41	44.32	9.47	Peak	100	282																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											




Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5180																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10360.00</td><td>60.64</td><td>68.20</td><td>-7.56</td><td>51.62</td><td>9.02</td><td>Peak</td><td>179</td><td>170</td></tr><tr><td>2</td><td>15540.00</td><td>36.93</td><td>54.00</td><td>-17.07</td><td>30.18</td><td>6.75</td><td>Average</td><td>100</td><td>311</td></tr><tr><td>3</td><td>15540.00</td><td>50.10</td><td>74.00</td><td>-23.90</td><td>43.35</td><td>6.75</td><td>Peak</td><td>100</td><td>311</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10360.00	60.64	68.20	-7.56	51.62	9.02	Peak	179	170	2	15540.00	36.93	54.00	-17.07	30.18	6.75	Average	100	311	3	15540.00	50.10	74.00	-23.90	43.35	6.75	Peak	100	311
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10360.00	60.64	68.20	-7.56	51.62	9.02	Peak	179	170																																		
2	15540.00	36.93	54.00	-17.07	30.18	6.75	Average	100	311																																		
3	15540.00	50.10	74.00	-23.90	43.35	6.75	Peak	100	311																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5180																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10360.00</td><td>64.38</td><td>68.20</td><td>-3.82</td><td>55.36</td><td>9.02</td><td>Peak</td><td>235</td><td>275</td></tr><tr><td>2</td><td>15540.00</td><td>37.16</td><td>54.00</td><td>-16.84</td><td>30.41</td><td>6.75</td><td>Average</td><td>100</td><td>158</td></tr><tr><td>3</td><td>15540.00</td><td>50.64</td><td>74.00</td><td>-23.36</td><td>43.89</td><td>6.75</td><td>Peak</td><td>100</td><td>158</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10360.00	64.38	68.20	-3.82	55.36	9.02	Peak	235	275	2	15540.00	37.16	54.00	-16.84	30.41	6.75	Average	100	158	3	15540.00	50.64	74.00	-23.36	43.89	6.75	Peak	100	158
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10360.00	64.38	68.20	-3.82	55.36	9.02	Peak	235	275																																		
2	15540.00	37.16	54.00	-16.84	30.41	6.75	Average	100	158																																		
3	15540.00	50.64	74.00	-23.36	43.89	6.75	Peak	100	158																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											

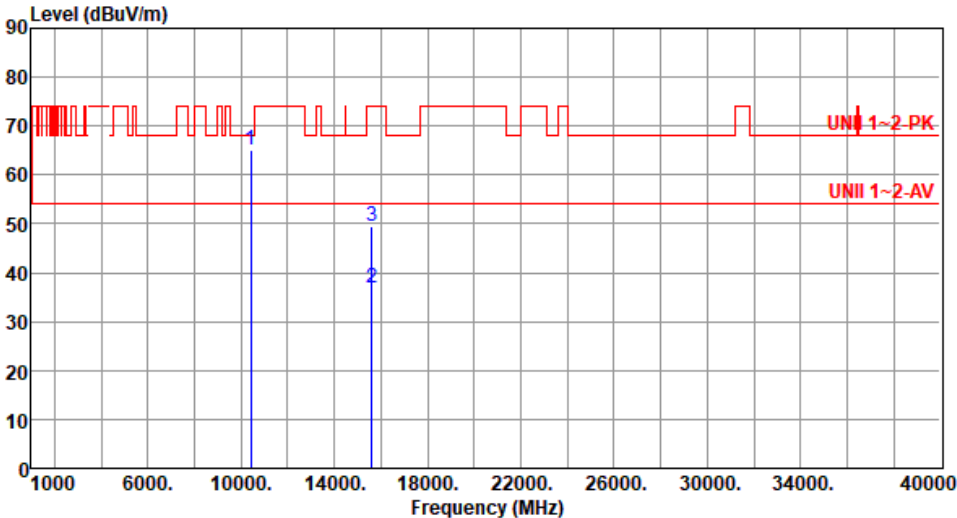

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5200																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10400.00</td><td>64.95</td><td>68.20</td><td>-3.25</td><td>55.86</td><td>9.09</td><td>Peak</td><td>210</td><td>340</td></tr><tr><td>2</td><td>15600.00</td><td>36.95</td><td>54.00</td><td>-17.05</td><td>30.37</td><td>6.58</td><td>Average</td><td>100</td><td>284</td></tr><tr><td>3</td><td>15600.00</td><td>49.57</td><td>74.00</td><td>-24.43</td><td>42.99</td><td>6.58</td><td>Peak</td><td>100</td><td>284</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10400.00	64.95	68.20	-3.25	55.86	9.09	Peak	210	340	2	15600.00	36.95	54.00	-17.05	30.37	6.58	Average	100	284	3	15600.00	49.57	74.00	-24.43	42.99	6.58	Peak	100	284
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10400.00	64.95	68.20	-3.25	55.86	9.09	Peak	210	340																																		
2	15600.00	36.95	54.00	-17.05	30.37	6.58	Average	100	284																																		
3	15600.00	49.57	74.00	-24.43	42.99	6.58	Peak	100	284																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											




Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5200																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
Level (dBuV/m) UNI 1~2-PK UNI 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10400.00</td><td>67.78</td><td>68.20</td><td>-0.42</td><td>58.69</td><td>9.09</td><td>Peak</td><td>192</td><td>76</td></tr><tr><td>2</td><td>15600.00</td><td>37.05</td><td>54.00</td><td>-16.95</td><td>30.47</td><td>6.58</td><td>Average</td><td>100</td><td>265</td></tr><tr><td>3</td><td>15600.00</td><td>49.77</td><td>74.00</td><td>-24.23</td><td>43.19</td><td>6.58</td><td>Peak</td><td>100</td><td>265</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10400.00	67.78	68.20	-0.42	58.69	9.09	Peak	192	76	2	15600.00	37.05	54.00	-16.95	30.47	6.58	Average	100	265	3	15600.00	49.77	74.00	-24.23	43.19	6.58	Peak	100	265
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10400.00	67.78	68.20	-0.42	58.69	9.09	Peak	192	76																																		
2	15600.00	37.05	54.00	-16.95	30.47	6.58	Average	100	265																																		
3	15600.00	49.77	74.00	-24.23	43.19	6.58	Peak	100	265																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5240																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
Level (dBuV/m) UNI 1~2-PK UNI 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10480.00</td><td>64.45</td><td>68.20</td><td>-3.75</td><td>55.55</td><td>8.90</td><td>Peak</td><td>206</td><td>338</td></tr><tr><td>2</td><td>15720.00</td><td>36.95</td><td>54.00</td><td>-17.05</td><td>30.49</td><td>6.46</td><td>Average</td><td>100</td><td>306</td></tr><tr><td>3</td><td>15720.00</td><td>50.52</td><td>74.00</td><td>-23.48</td><td>44.06</td><td>6.46</td><td>Peak</td><td>100</td><td>306</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10480.00	64.45	68.20	-3.75	55.55	8.90	Peak	206	338	2	15720.00	36.95	54.00	-17.05	30.49	6.46	Average	100	306	3	15720.00	50.52	74.00	-23.48	44.06	6.46	Peak	100	306
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10480.00	64.45	68.20	-3.75	55.55	8.90	Peak	206	338																																		
2	15720.00	36.95	54.00	-17.05	30.49	6.46	Average	100	306																																		
3	15720.00	50.52	74.00	-23.48	44.06	6.46	Peak	100	306																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											

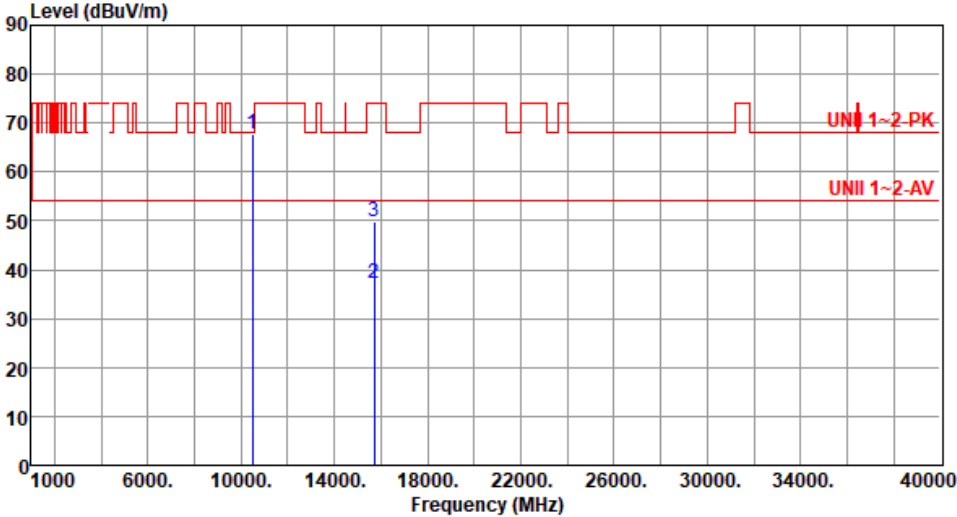


Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5240																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10480.00</td><td>67.84</td><td>68.20</td><td>-0.36</td><td>58.94</td><td>8.90</td><td>Peak</td><td>230</td><td>272</td></tr><tr><td>2</td><td>15720.00</td><td>37.08</td><td>54.00</td><td>-16.92</td><td>30.62</td><td>6.46</td><td>Average</td><td>100</td><td>243</td></tr><tr><td>3</td><td>15720.00</td><td>49.78</td><td>74.00</td><td>-24.22</td><td>43.32</td><td>6.46</td><td>Peak</td><td>100</td><td>243</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10480.00	67.84	68.20	-0.36	58.94	8.90	Peak	230	272	2	15720.00	37.08	54.00	-16.92	30.62	6.46	Average	100	243	3	15720.00	49.78	74.00	-24.22	43.32	6.46	Peak	100	243
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10480.00	67.84	68.20	-0.36	58.94	8.90	Peak	230	272																																		
2	15720.00	37.08	54.00	-16.92	30.62	6.46	Average	100	243																																		
3	15720.00	49.78	74.00	-24.22	43.32	6.46	Peak	100	243																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

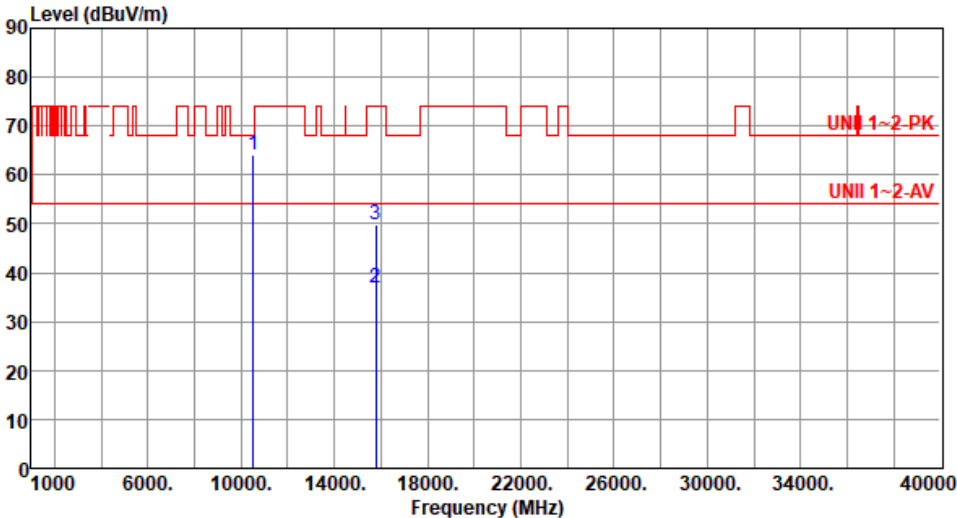Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5260																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>10520.00</td><td>64.07</td><td>68.20</td><td>-4.13</td><td>55.21</td><td>8.86</td><td>Peak</td><td>198</td><td>342</td></tr><tr><td>2</td><td>15780.00</td><td>36.77</td><td>54.00</td><td>-17.23</td><td>30.21</td><td>6.56</td><td>Average</td><td>100</td><td>242</td></tr><tr><td>3</td><td>15780.00</td><td>49.70</td><td>74.00</td><td>-24.30</td><td>43.14</td><td>6.56</td><td>Peak</td><td>100</td><td>242</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10520.00	64.07	68.20	-4.13	55.21	8.86	Peak	198	342	2	15780.00	36.77	54.00	-17.23	30.21	6.56	Average	100	242	3	15780.00	49.70	74.00	-24.30	43.14	6.56	Peak	100	242
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10520.00	64.07	68.20	-4.13	55.21	8.86	Peak	198	342																																		
2	15780.00	36.77	54.00	-17.23	30.21	6.56	Average	100	242																																		
3	15780.00	49.70	74.00	-24.30	43.14	6.56	Peak	100	242																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5260																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
Level (dBuV/m) UNI 1~2-PK UNI 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10520.00</td><td>67.18</td><td>68.20</td><td>-1.02</td><td>58.32</td><td>8.86</td><td>Peak</td><td>230</td><td>266</td></tr><tr><td>2</td><td>15780.00</td><td>37.08</td><td>54.00</td><td>-16.92</td><td>30.52</td><td>6.56</td><td>Average</td><td>100</td><td>306</td></tr><tr><td>3</td><td>15780.00</td><td>50.18</td><td>74.00</td><td>-23.82</td><td>43.62</td><td>6.56</td><td>Peak</td><td>100</td><td>306</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10520.00	67.18	68.20	-1.02	58.32	8.86	Peak	230	266	2	15780.00	37.08	54.00	-16.92	30.52	6.56	Average	100	306	3	15780.00	50.18	74.00	-23.82	43.62	6.56	Peak	100	306
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10520.00	67.18	68.20	-1.02	58.32	8.86	Peak	230	266																																		
2	15780.00	37.08	54.00	-16.92	30.52	6.56	Average	100	306																																		
3	15780.00	50.18	74.00	-23.82	43.62	6.56	Peak	100	306																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5300																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>10600.00</td><td>49.74</td><td>54.00</td><td>-4.26</td><td>40.58</td><td>9.16</td><td>Average</td><td>200</td><td>341</td></tr><tr><td>2</td><td>10600.00</td><td>62.95</td><td>74.00</td><td>-11.05</td><td>53.79</td><td>9.16</td><td>Peak</td><td>200</td><td>341</td></tr><tr><td>3</td><td>15900.00</td><td>36.91</td><td>54.00</td><td>-17.09</td><td>30.19</td><td>6.72</td><td>Average</td><td>100</td><td>247</td></tr><tr><td>4</td><td>15900.00</td><td>50.92</td><td>74.00</td><td>-23.08</td><td>44.20</td><td>6.72</td><td>Peak</td><td>100</td><td>247</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10600.00	49.74	54.00	-4.26	40.58	9.16	Average	200	341	2	10600.00	62.95	74.00	-11.05	53.79	9.16	Peak	200	341	3	15900.00	36.91	54.00	-17.09	30.19	6.72	Average	100	247	4	15900.00	50.92	74.00	-23.08	44.20	6.72	Peak	100	247
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	10600.00	49.74	54.00	-4.26	40.58	9.16	Average	200	341																																												
2	10600.00	62.95	74.00	-11.05	53.79	9.16	Peak	200	341																																												
3	15900.00	36.91	54.00	-17.09	30.19	6.72	Average	100	247																																												
4	15900.00	50.92	74.00	-23.08	44.20	6.72	Peak	100	247																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5300																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10600.00</td><td>52.49</td><td>54.00</td><td>-1.51</td><td>43.33</td><td>9.16</td><td>Average</td><td>186</td><td>265</td></tr><tr><td>2</td><td>10600.00</td><td>66.47</td><td>74.00</td><td>-7.53</td><td>57.31</td><td>9.16</td><td>Peak</td><td>186</td><td>265</td></tr><tr><td>3</td><td>15900.00</td><td>37.10</td><td>54.00</td><td>-16.90</td><td>30.38</td><td>6.72</td><td>Average</td><td>100</td><td>354</td></tr><tr><td>4</td><td>15900.00</td><td>51.15</td><td>74.00</td><td>-22.85</td><td>44.43</td><td>6.72</td><td>Peak</td><td>100</td><td>354</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10600.00	52.49	54.00	-1.51	43.33	9.16	Average	186	265	2	10600.00	66.47	74.00	-7.53	57.31	9.16	Peak	186	265	3	15900.00	37.10	54.00	-16.90	30.38	6.72	Average	100	354	4	15900.00	51.15	74.00	-22.85	44.43	6.72	Peak	100	354
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	10600.00	52.49	54.00	-1.51	43.33	9.16	Average	186	265																																												
2	10600.00	66.47	74.00	-7.53	57.31	9.16	Peak	186	265																																												
3	15900.00	37.10	54.00	-16.90	30.38	6.72	Average	100	354																																												
4	15900.00	51.15	74.00	-22.85	44.43	6.72	Peak	100	354																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5320																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10640.00</td><td>49.28</td><td>54.00</td><td>-4.72</td><td>40.12</td><td>9.16</td><td>Average</td><td>188</td><td>343</td></tr><tr><td>2</td><td>10640.00</td><td>62.13</td><td>74.00</td><td>-11.87</td><td>52.97</td><td>9.16</td><td>Peak</td><td>188</td><td>343</td></tr><tr><td>3</td><td>15960.00</td><td>36.91</td><td>54.00</td><td>-17.09</td><td>30.46</td><td>6.45</td><td>Average</td><td>100</td><td>247</td></tr><tr><td>4</td><td>15960.00</td><td>50.92</td><td>74.00</td><td>-23.08</td><td>44.47</td><td>6.45</td><td>Peak</td><td>100</td><td>247</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10640.00	49.28	54.00	-4.72	40.12	9.16	Average	188	343	2	10640.00	62.13	74.00	-11.87	52.97	9.16	Peak	188	343	3	15960.00	36.91	54.00	-17.09	30.46	6.45	Average	100	247	4	15960.00	50.92	74.00	-23.08	44.47	6.45	Peak	100	247
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	10640.00	49.28	54.00	-4.72	40.12	9.16	Average	188	343																																												
2	10640.00	62.13	74.00	-11.87	52.97	9.16	Peak	188	343																																												
3	15960.00	36.91	54.00	-17.09	30.46	6.45	Average	100	247																																												
4	15960.00	50.92	74.00	-23.08	44.47	6.45	Peak	100	247																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5320																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10640.00</td><td>52.03</td><td>54.00</td><td>-1.97</td><td>42.87</td><td>9.16</td><td>Average</td><td>175</td><td>281</td></tr><tr><td>2</td><td>10640.00</td><td>65.92</td><td>74.00</td><td>-8.08</td><td>56.76</td><td>9.16</td><td>Peak</td><td>175</td><td>281</td></tr><tr><td>3</td><td>15960.00</td><td>36.48</td><td>54.00</td><td>-17.52</td><td>30.03</td><td>6.45</td><td>Average</td><td>100</td><td>311</td></tr><tr><td>4</td><td>15960.00</td><td>50.70</td><td>74.00</td><td>-23.30</td><td>44.25</td><td>6.45</td><td>Peak</td><td>100</td><td>311</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10640.00	52.03	54.00	-1.97	42.87	9.16	Average	175	281	2	10640.00	65.92	74.00	-8.08	56.76	9.16	Peak	175	281	3	15960.00	36.48	54.00	-17.52	30.03	6.45	Average	100	311	4	15960.00	50.70	74.00	-23.30	44.25	6.45	Peak	100	311
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	10640.00	52.03	54.00	-1.97	42.87	9.16	Average	175	281																																												
2	10640.00	65.92	74.00	-8.08	56.76	9.16	Peak	175	281																																												
3	15960.00	36.48	54.00	-17.52	30.03	6.45	Average	100	311																																												
4	15960.00	50.70	74.00	-23.30	44.25	6.45	Peak	100	311																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Unwanted Emissions

Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5500
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) </			



Unwanted Emissions

Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5500
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) <			



Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5580
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) <			



Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5580
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) </			



Unwanted Emissions


Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5700																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11400.00</td><td>37.62</td><td>54.00</td><td>-16.38</td><td>28.39</td><td>9.23</td><td>Average</td><td>100</td><td>174</td></tr><tr><td>2</td><td>11400.00</td><td>50.35</td><td>74.00</td><td>-23.65</td><td>41.12</td><td>9.23</td><td>Peak</td><td>100</td><td>174</td></tr><tr><td>3</td><td>17100.00</td><td>53.56</td><td>68.20</td><td>-14.64</td><td>44.40</td><td>9.16</td><td>Peak</td><td>100</td><td>276</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11400.00	37.62	54.00	-16.38	28.39	9.23	Average	100	174	2	11400.00	50.35	74.00	-23.65	41.12	9.23	Peak	100	174	3	17100.00	53.56	68.20	-14.64	44.40	9.16	Peak	100	276
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11400.00	37.62	54.00	-16.38	28.39	9.23	Average	100	174																																		
2	11400.00	50.35	74.00	-23.65	41.12	9.23	Peak	100	174																																		
3	17100.00	53.56	68.20	-14.64	44.40	9.16	Peak	100	276																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions


Appendix D

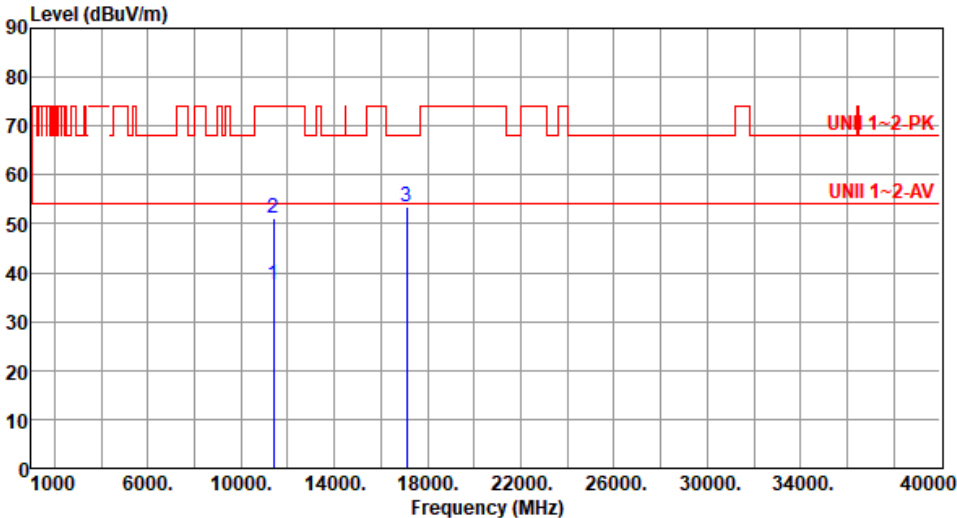Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5700																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11400.00</td><td>37.64</td><td>54.00</td><td>-16.36</td><td>28.41</td><td>9.23</td><td>Average</td><td>226</td><td>138</td></tr><tr><td>2</td><td>11400.00</td><td>51.08</td><td>74.00</td><td>-22.92</td><td>41.85</td><td>9.23</td><td>Peak</td><td>226</td><td>138</td></tr><tr><td>3</td><td>17100.00</td><td>53.45</td><td>68.20</td><td>-14.75</td><td>44.29</td><td>9.16</td><td>Peak</td><td>100</td><td>234</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11400.00	37.64	54.00	-16.36	28.41	9.23	Average	226	138	2	11400.00	51.08	74.00	-22.92	41.85	9.23	Peak	226	138	3	17100.00	53.45	68.20	-14.75	44.29	9.16	Peak	100	234
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11400.00	37.64	54.00	-16.36	28.41	9.23	Average	226	138																																		
2	11400.00	51.08	74.00	-22.92	41.85	9.23	Peak	226	138																																		
3	17100.00	53.45	68.20	-14.75	44.29	9.16	Peak	100	234																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											




Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5745																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11490.00</td><td>46.93</td><td>54.00</td><td>-7.07</td><td>37.48</td><td>9.45</td><td>Average</td><td>231</td><td>200</td></tr><tr><td>2</td><td>11490.00</td><td>59.77</td><td>74.00</td><td>-14.23</td><td>50.32</td><td>9.45</td><td>Peak</td><td>231</td><td>200</td></tr><tr><td>3</td><td>17235.00</td><td>53.55</td><td>68.20</td><td>-14.65</td><td>44.45</td><td>9.10</td><td>Peak</td><td>100</td><td>218</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11490.00	46.93	54.00	-7.07	37.48	9.45	Average	231	200	2	11490.00	59.77	74.00	-14.23	50.32	9.45	Peak	231	200	3	17235.00	53.55	68.20	-14.65	44.45	9.10	Peak	100	218
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11490.00	46.93	54.00	-7.07	37.48	9.45	Average	231	200																																		
2	11490.00	59.77	74.00	-14.23	50.32	9.45	Peak	231	200																																		
3	17235.00	53.55	68.20	-14.65	44.45	9.10	Peak	100	218																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											

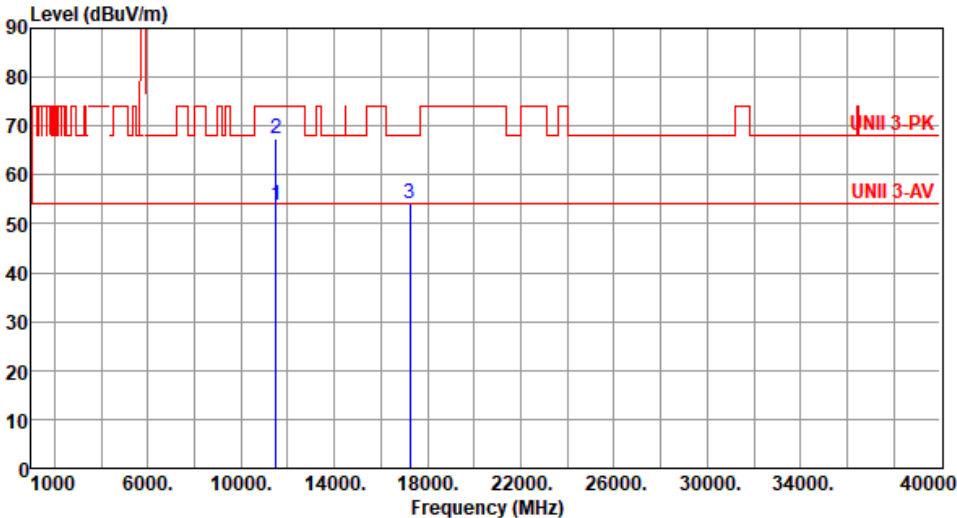

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5745																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11490.00</td><td>53.78</td><td>54.00</td><td>-0.22</td><td>44.33</td><td>9.45</td><td>Average</td><td>240</td><td>261</td></tr><tr><td>2</td><td>11490.00</td><td>67.35</td><td>74.00</td><td>-6.65</td><td>57.90</td><td>9.45</td><td>Peak</td><td>240</td><td>261</td></tr><tr><td>3</td><td>17235.00</td><td>54.26</td><td>68.20</td><td>-13.94</td><td>45.16</td><td>9.10</td><td>Peak</td><td>100</td><td>343</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11490.00	53.78	54.00	-0.22	44.33	9.45	Average	240	261	2	11490.00	67.35	74.00	-6.65	57.90	9.45	Peak	240	261	3	17235.00	54.26	68.20	-13.94	45.16	9.10	Peak	100	343
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11490.00	53.78	54.00	-0.22	44.33	9.45	Average	240	261																																		
2	11490.00	67.35	74.00	-6.65	57.90	9.45	Peak	240	261																																		
3	17235.00	54.26	68.20	-13.94	45.16	9.10	Peak	100	343																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											

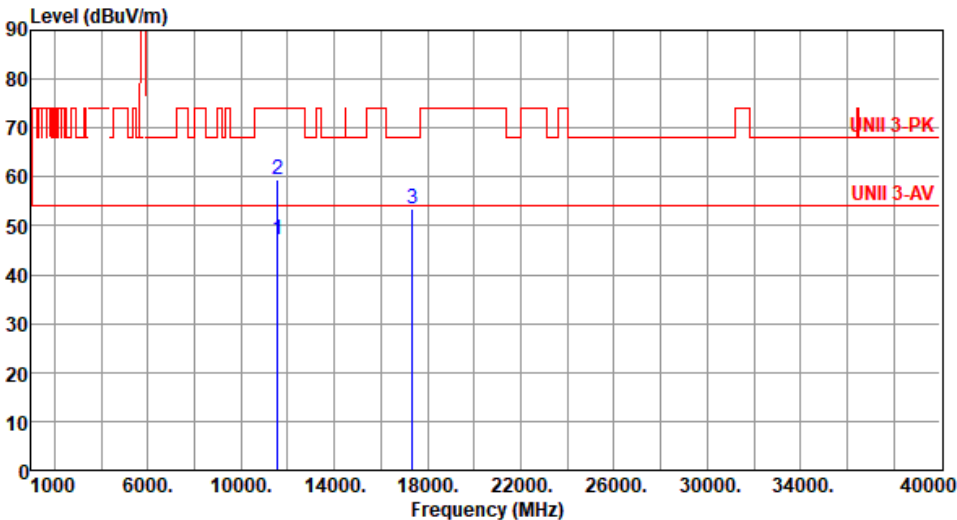

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5785																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11570.00</td><td>47.22</td><td>54.00</td><td>-6.78</td><td>37.98</td><td>9.24</td><td>Average</td><td>130</td><td>159</td></tr><tr><td>2</td><td>11570.00</td><td>59.56</td><td>74.00</td><td>-14.44</td><td>50.32</td><td>9.24</td><td>Peak</td><td>130</td><td>159</td></tr><tr><td>3</td><td>17355.00</td><td>53.45</td><td>68.20</td><td>-14.75</td><td>44.27</td><td>9.18</td><td>Peak</td><td>100</td><td>267</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11570.00	47.22	54.00	-6.78	37.98	9.24	Average	130	159	2	11570.00	59.56	74.00	-14.44	50.32	9.24	Peak	130	159	3	17355.00	53.45	68.20	-14.75	44.27	9.18	Peak	100	267
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11570.00	47.22	54.00	-6.78	37.98	9.24	Average	130	159																																		
2	11570.00	59.56	74.00	-14.44	50.32	9.24	Peak	130	159																																		
3	17355.00	53.45	68.20	-14.75	44.27	9.18	Peak	100	267																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5785																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11570.00</td><td>53.73</td><td>54.00</td><td>-0.27</td><td>44.49</td><td>9.24</td><td>Average</td><td>177</td><td>276</td></tr><tr><td>2</td><td>11570.00</td><td>66.59</td><td>74.00</td><td>-7.41</td><td>57.35</td><td>9.24</td><td>Peak</td><td>177</td><td>276</td></tr><tr><td>3</td><td>17355.00</td><td>54.17</td><td>68.20</td><td>-14.03</td><td>44.99</td><td>9.18</td><td>Peak</td><td>100</td><td>298</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11570.00	53.73	54.00	-0.27	44.49	9.24	Average	177	276	2	11570.00	66.59	74.00	-7.41	57.35	9.24	Peak	177	276	3	17355.00	54.17	68.20	-14.03	44.99	9.18	Peak	100	298
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11570.00	53.73	54.00	-0.27	44.49	9.24	Average	177	276																																		
2	11570.00	66.59	74.00	-7.41	57.35	9.24	Peak	177	276																																		
3	17355.00	54.17	68.20	-14.03	44.99	9.18	Peak	100	298																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											




Unwanted Emissions

Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5825																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
Level (dBuV/m) UNII 3-PK UNII 3-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11650.00</td><td>47.04</td><td>54.00</td><td>-6.96</td><td>38.10</td><td>8.94</td><td>Average</td><td>135</td><td>159</td></tr><tr><td>2</td><td>11650.00</td><td>58.77</td><td>74.00</td><td>-15.23</td><td>49.83</td><td>8.94</td><td>Peak</td><td>135</td><td>159</td></tr><tr><td>3</td><td>17475.00</td><td>54.82</td><td>68.20</td><td>-13.38</td><td>45.35</td><td>9.47</td><td>Peak</td><td>100</td><td>253</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11650.00	47.04	54.00	-6.96	38.10	8.94	Average	135	159	2	11650.00	58.77	74.00	-15.23	49.83	8.94	Peak	135	159	3	17475.00	54.82	68.20	-13.38	45.35	9.47	Peak	100	253
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11650.00	47.04	54.00	-6.96	38.10	8.94	Average	135	159																																		
2	11650.00	58.77	74.00	-15.23	49.83	8.94	Peak	135	159																																		
3	17475.00	54.82	68.20	-13.38	45.35	9.47	Peak	100	253																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											

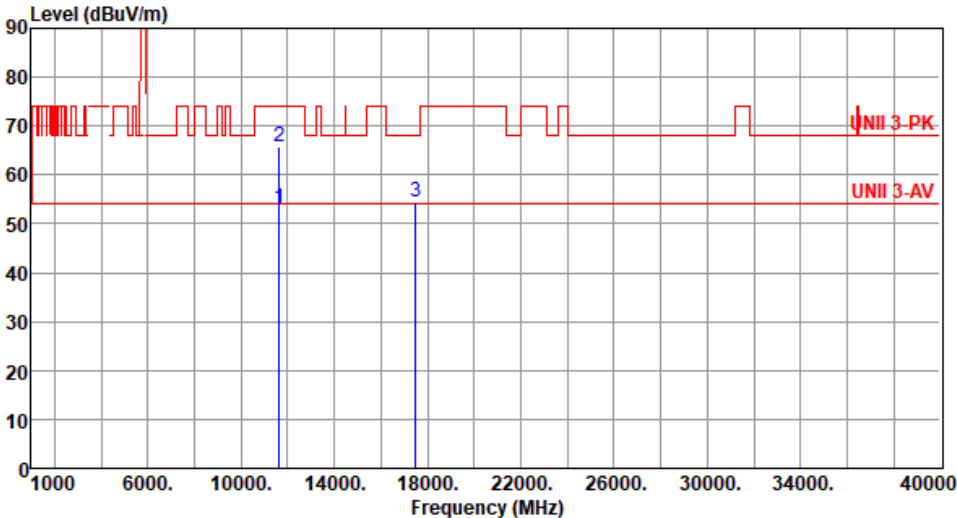

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5825																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11650.00</td><td>53.22</td><td>54.00</td><td>-0.78</td><td>44.28</td><td>8.94</td><td>Average</td><td>194</td><td>275</td></tr><tr><td>2</td><td>11650.00</td><td>65.65</td><td>74.00</td><td>-8.35</td><td>56.71</td><td>8.94</td><td>Peak</td><td>194</td><td>275</td></tr><tr><td>3</td><td>17475.00</td><td>54.33</td><td>68.20</td><td>-13.87</td><td>44.86</td><td>9.47</td><td>Peak</td><td>100</td><td>214</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11650.00	53.22	54.00	-0.78	44.28	8.94	Average	194	275	2	11650.00	65.65	74.00	-8.35	56.71	8.94	Peak	194	275	3	17475.00	54.33	68.20	-13.87	44.86	9.47	Peak	100	214
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11650.00	53.22	54.00	-0.78	44.28	8.94	Average	194	275																																		
2	11650.00	65.65	74.00	-8.35	56.71	8.94	Peak	194	275																																		
3	17475.00	54.33	68.20	-13.87	44.86	9.47	Peak	100	214																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions


Appendix D

Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5190
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5190																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10380.00</td><td>63.22</td><td>68.20</td><td>-4.98</td><td>54.16</td><td>9.06</td><td>Peak</td><td>183</td><td>270</td></tr><tr><td>2</td><td>15570.00</td><td>36.94</td><td>54.00</td><td>-17.06</td><td>30.26</td><td>6.68</td><td>Average</td><td>100</td><td>266</td></tr><tr><td>3</td><td>15570.00</td><td>50.61</td><td>74.00</td><td>-23.39</td><td>43.93</td><td>6.68</td><td>Peak</td><td>100</td><td>266</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10380.00	63.22	68.20	-4.98	54.16	9.06	Peak	183	270	2	15570.00	36.94	54.00	-17.06	30.26	6.68	Average	100	266	3	15570.00	50.61	74.00	-23.39	43.93	6.68	Peak	100	266
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10380.00	63.22	68.20	-4.98	54.16	9.06	Peak	183	270																																		
2	15570.00	36.94	54.00	-17.06	30.26	6.68	Average	100	266																																		
3	15570.00	50.61	74.00	-23.39	43.93	6.68	Peak	100	266																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											

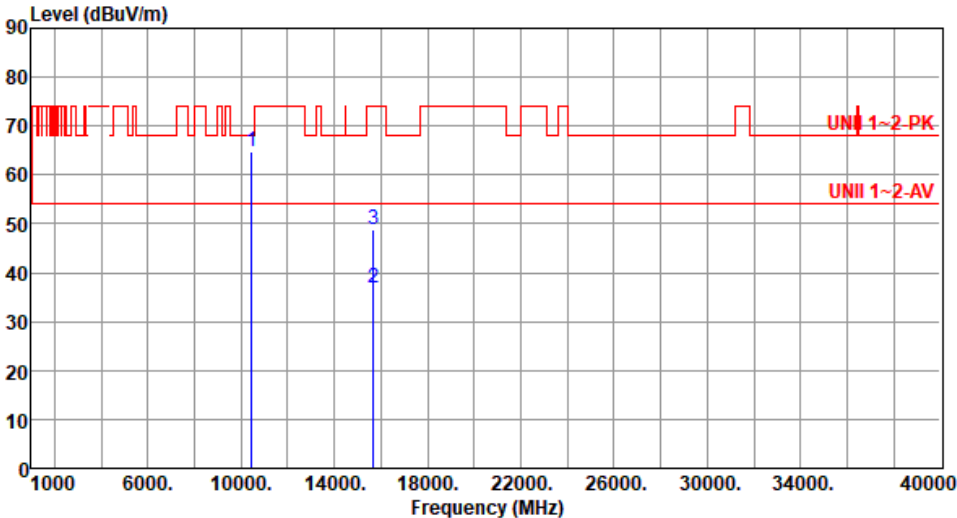

Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5230																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10460.00</td><td>64.74</td><td>68.20</td><td>-3.46</td><td>55.79</td><td>8.95</td><td>Peak</td><td>225</td><td>341</td></tr><tr><td>2</td><td>15690.00</td><td>36.75</td><td>54.00</td><td>-17.25</td><td>30.41</td><td>6.34</td><td>Average</td><td>100</td><td>206</td></tr><tr><td>3</td><td>15690.00</td><td>48.91</td><td>74.00</td><td>-25.09</td><td>42.57</td><td>6.34</td><td>Peak</td><td>100</td><td>206</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10460.00	64.74	68.20	-3.46	55.79	8.95	Peak	225	341	2	15690.00	36.75	54.00	-17.25	30.41	6.34	Average	100	206	3	15690.00	48.91	74.00	-25.09	42.57	6.34	Peak	100	206
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10460.00	64.74	68.20	-3.46	55.79	8.95	Peak	225	341																																		
2	15690.00	36.75	54.00	-17.25	30.41	6.34	Average	100	206																																		
3	15690.00	48.91	74.00	-25.09	42.57	6.34	Peak	100	206																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											




Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5230																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10460.00</td><td>67.11</td><td>68.20</td><td>-1.09</td><td>58.16</td><td>8.95</td><td>Peak</td><td>193</td><td>266</td></tr><tr><td>2</td><td>15690.00</td><td>36.75</td><td>54.00</td><td>-17.25</td><td>30.41</td><td>6.34</td><td>Average</td><td>100</td><td>198</td></tr><tr><td>3</td><td>15690.00</td><td>49.62</td><td>74.00</td><td>-24.38</td><td>43.28</td><td>6.34</td><td>Peak</td><td>100</td><td>198</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10460.00	67.11	68.20	-1.09	58.16	8.95	Peak	193	266	2	15690.00	36.75	54.00	-17.25	30.41	6.34	Average	100	198	3	15690.00	49.62	74.00	-24.38	43.28	6.34	Peak	100	198
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10460.00	67.11	68.20	-1.09	58.16	8.95	Peak	193	266																																		
2	15690.00	36.75	54.00	-17.25	30.41	6.34	Average	100	198																																		
3	15690.00	49.62	74.00	-24.38	43.28	6.34	Peak	100	198																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5270																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):23 Humidity(%):66																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10540.00</td><td>62.53</td><td>68.20</td><td>-5.67</td><td>53.67</td><td>8.86</td><td>Peak</td><td>204</td><td>339</td></tr><tr><td>2</td><td>15810.00</td><td>36.95</td><td>54.00</td><td>-17.05</td><td>30.42</td><td>6.53</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>3</td><td>15810.00</td><td>49.96</td><td>74.00</td><td>-24.04</td><td>43.43</td><td>6.53</td><td>Peak</td><td>100</td><td>208</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10540.00	62.53	68.20	-5.67	53.67	8.86	Peak	204	339	2	15810.00	36.95	54.00	-17.05	30.42	6.53	Average	100	208	3	15810.00	49.96	74.00	-24.04	43.43	6.53	Peak	100	208
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10540.00	62.53	68.20	-5.67	53.67	8.86	Peak	204	339																																		
2	15810.00	36.95	54.00	-17.05	30.42	6.53	Average	100	208																																		
3	15810.00	49.96	74.00	-24.04	43.43	6.53	Peak	100	208																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											

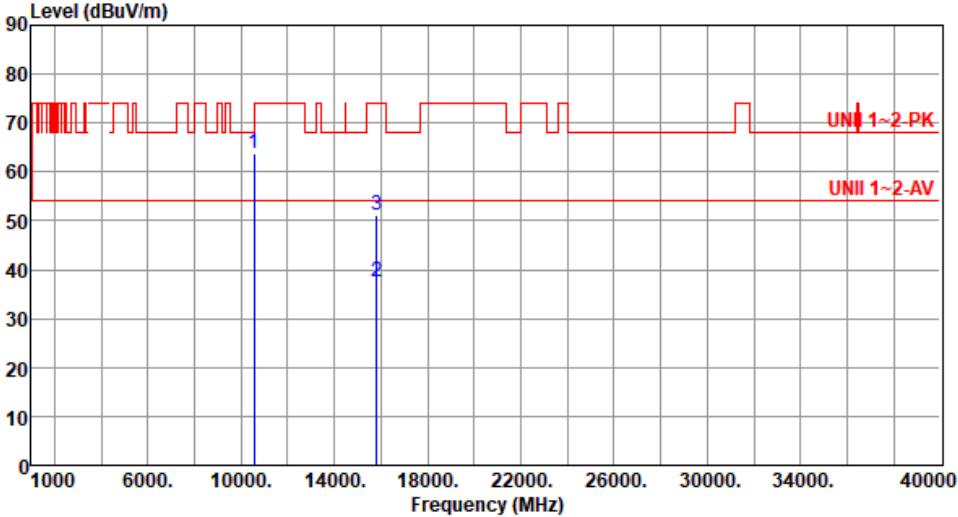

Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5270																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):23 Humidity(%):66																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10540.00</td><td>63.72</td><td>68.20</td><td>-4.48</td><td>54.86</td><td>8.86</td><td>Peak</td><td>174</td><td>261</td></tr><tr><td>2</td><td>15810.00</td><td>37.69</td><td>54.00</td><td>-16.31</td><td>31.16</td><td>6.53</td><td>Average</td><td>100</td><td>237</td></tr><tr><td>3</td><td>15810.00</td><td>51.22</td><td>74.00</td><td>-22.78</td><td>44.69</td><td>6.53</td><td>Peak</td><td>100</td><td>237</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10540.00	63.72	68.20	-4.48	54.86	8.86	Peak	174	261	2	15810.00	37.69	54.00	-16.31	31.16	6.53	Average	100	237	3	15810.00	51.22	74.00	-22.78	44.69	6.53	Peak	100	237
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10540.00	63.72	68.20	-4.48	54.86	8.86	Peak	174	261																																		
2	15810.00	37.69	54.00	-16.31	31.16	6.53	Average	100	237																																		
3	15810.00	51.22	74.00	-22.78	44.69	6.53	Peak	100	237																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5310																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):66																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10620.00</td><td>49.72</td><td>54.00</td><td>-4.28</td><td>40.55</td><td>9.17</td><td>Average</td><td>196</td><td>344</td></tr><tr><td>2</td><td>10620.00</td><td>60.54</td><td>74.00</td><td>-13.46</td><td>51.37</td><td>9.17</td><td>Peak</td><td>196</td><td>344</td></tr><tr><td>3</td><td>15930.00</td><td>35.90</td><td>54.00</td><td>-18.10</td><td>29.33</td><td>6.57</td><td>Average</td><td>100</td><td>212</td></tr><tr><td>4</td><td>15930.00</td><td>49.12</td><td>74.00</td><td>-24.88</td><td>42.55</td><td>6.57</td><td>Peak</td><td>100</td><td>212</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10620.00	49.72	54.00	-4.28	40.55	9.17	Average	196	344	2	10620.00	60.54	74.00	-13.46	51.37	9.17	Peak	196	344	3	15930.00	35.90	54.00	-18.10	29.33	6.57	Average	100	212	4	15930.00	49.12	74.00	-24.88	42.55	6.57	Peak	100	212
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	10620.00	49.72	54.00	-4.28	40.55	9.17	Average	196	344																																												
2	10620.00	60.54	74.00	-13.46	51.37	9.17	Peak	196	344																																												
3	15930.00	35.90	54.00	-18.10	29.33	6.57	Average	100	212																																												
4	15930.00	49.12	74.00	-24.88	42.55	6.57	Peak	100	212																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					




Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5310																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):66																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10620.00</td><td>50.84</td><td>54.00</td><td>-3.16</td><td>41.67</td><td>9.17</td><td>Average</td><td>182</td><td>277</td></tr><tr><td>2</td><td>10620.00</td><td>61.90</td><td>74.00</td><td>-12.10</td><td>52.73</td><td>9.17</td><td>Peak</td><td>182</td><td>277</td></tr><tr><td>3</td><td>15930.00</td><td>36.16</td><td>54.00</td><td>-17.84</td><td>29.59</td><td>6.57</td><td>Average</td><td>100</td><td>248</td></tr><tr><td>4</td><td>15930.00</td><td>49.49</td><td>74.00</td><td>-24.51</td><td>42.92</td><td>6.57</td><td>Peak</td><td>100</td><td>248</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10620.00	50.84	54.00	-3.16	41.67	9.17	Average	182	277	2	10620.00	61.90	74.00	-12.10	52.73	9.17	Peak	182	277	3	15930.00	36.16	54.00	-17.84	29.59	6.57	Average	100	248	4	15930.00	49.49	74.00	-24.51	42.92	6.57	Peak	100	248
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	10620.00	50.84	54.00	-3.16	41.67	9.17	Average	182	277																																												
2	10620.00	61.90	74.00	-12.10	52.73	9.17	Peak	182	277																																												
3	15930.00	36.16	54.00	-17.84	29.59	6.57	Average	100	248																																												
4	15930.00	49.49	74.00	-24.51	42.92	6.57	Peak	100	248																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Unwanted Emissions

Appendix D

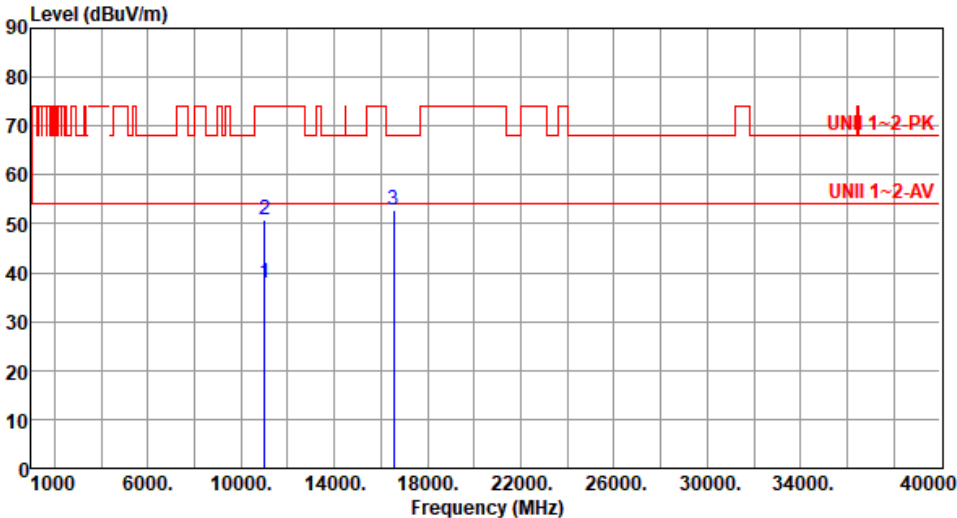Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5510																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):23 Humidity(%):66																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11020.00</td><td>37.78</td><td>54.00</td><td>-16.22</td><td>28.28</td><td>9.50</td><td>Average</td><td>100</td><td>304</td></tr><tr><td>2</td><td>11020.00</td><td>50.72</td><td>74.00</td><td>-23.28</td><td>41.22</td><td>9.50</td><td>Peak</td><td>100</td><td>304</td></tr><tr><td>3</td><td>16530.00</td><td>52.83</td><td>68.20</td><td>-15.37</td><td>43.86</td><td>8.97</td><td>Peak</td><td>100</td><td>333</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11020.00	37.78	54.00	-16.22	28.28	9.50	Average	100	304	2	11020.00	50.72	74.00	-23.28	41.22	9.50	Peak	100	304	3	16530.00	52.83	68.20	-15.37	43.86	8.97	Peak	100	333
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11020.00	37.78	54.00	-16.22	28.28	9.50	Average	100	304																																		
2	11020.00	50.72	74.00	-23.28	41.22	9.50	Peak	100	304																																		
3	16530.00	52.83	68.20	-15.37	43.86	8.97	Peak	100	333																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5510						
Polarization	Vertical								
Test By :Akun Chung- Temperature(°C):23 Humidity(%):66									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	11020.00	38.17	54.00	-15.83	28.67	9.50	Average	100	235
2	11020.00	51.36	74.00	-22.64	41.86	9.50	Peak	100	235
3	16530.00	51.72	68.20	-16.48	42.75	8.97	Peak	100	302

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5590
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):66			
Level (dBuV/m) </			



Unwanted Emissions

Appendix D

Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5590																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):23 Humidity(%):66																																											
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11180.00</td><td>37.84</td><td>54.00</td><td>-16.16</td><td>29.02</td><td>8.82</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>2</td><td>11180.00</td><td>50.85</td><td>74.00</td><td>-23.15</td><td>42.03</td><td>8.82</td><td>Peak</td><td>100</td><td>218</td></tr><tr><td>3</td><td>16770.00</td><td>53.32</td><td>68.20</td><td>-14.88</td><td>43.63</td><td>9.69</td><td>Peak</td><td>100</td><td>294</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11180.00	37.84	54.00	-16.16	29.02	8.82	Average	100	218	2	11180.00	50.85	74.00	-23.15	42.03	8.82	Peak	100	218	3	16770.00	53.32	68.20	-14.88	43.63	9.69	Peak	100	294
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11180.00	37.84	54.00	-16.16	29.02	8.82	Average	100	218																																		
2	11180.00	50.85	74.00	-23.15	42.03	8.82	Peak	100	218																																		
3	16770.00	53.32	68.20	-14.88	43.63	9.69	Peak	100	294																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5670
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):66			
Level (dBuV/m) </			



Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5670																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):23 Humidity(%):66																																											
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11340.00</td><td>37.88</td><td>54.00</td><td>-16.12</td><td>28.77</td><td>9.11</td><td>Average</td><td>100</td><td>228</td></tr><tr><td>2</td><td>11340.00</td><td>50.86</td><td>74.00</td><td>-23.14</td><td>41.75</td><td>9.11</td><td>Peak</td><td>100</td><td>228</td></tr><tr><td>3</td><td>17010.00</td><td>52.16</td><td>68.20</td><td>-16.04</td><td>42.68</td><td>9.48</td><td>Peak</td><td>100</td><td>311</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11340.00	37.88	54.00	-16.12	28.77	9.11	Average	100	228	2	11340.00	50.86	74.00	-23.14	41.75	9.11	Peak	100	228	3	17010.00	52.16	68.20	-16.04	42.68	9.48	Peak	100	311
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11340.00	37.88	54.00	-16.12	28.77	9.11	Average	100	228																																		
2	11340.00	50.86	74.00	-23.14	41.75	9.11	Peak	100	228																																		
3	17010.00	52.16	68.20	-16.04	42.68	9.48	Peak	100	311																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											




Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5755																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m) UNII 3-PK UNII 3-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11510.00</td><td>46.50</td><td>54.00</td><td>-7.50</td><td>37.05</td><td>9.45</td><td>Average</td><td>313</td><td>1</td></tr><tr><td>2</td><td>11510.00</td><td>58.94</td><td>74.00</td><td>-15.06</td><td>49.49</td><td>9.45</td><td>Peak</td><td>313</td><td>1</td></tr><tr><td>3</td><td>17265.00</td><td>54.05</td><td>68.20</td><td>-14.15</td><td>45.02</td><td>9.03</td><td>Peak</td><td>100</td><td>169</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11510.00	46.50	54.00	-7.50	37.05	9.45	Average	313	1	2	11510.00	58.94	74.00	-15.06	49.49	9.45	Peak	313	1	3	17265.00	54.05	68.20	-14.15	45.02	9.03	Peak	100	169
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11510.00	46.50	54.00	-7.50	37.05	9.45	Average	313	1																																		
2	11510.00	58.94	74.00	-15.06	49.49	9.45	Peak	313	1																																		
3	17265.00	54.05	68.20	-14.15	45.02	9.03	Peak	100	169																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											




Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5755																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11510.00</td><td>51.88</td><td>54.00</td><td>-2.12</td><td>42.43</td><td>9.45</td><td>Average</td><td>243</td><td>263</td></tr><tr><td>2</td><td>11510.00</td><td>65.70</td><td>74.00</td><td>-8.30</td><td>56.25</td><td>9.45</td><td>Peak</td><td>243</td><td>263</td></tr><tr><td>3</td><td>17265.00</td><td>53.94</td><td>68.20</td><td>-14.26</td><td>44.91</td><td>9.03</td><td>Peak</td><td>100</td><td>217</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11510.00	51.88	54.00	-2.12	42.43	9.45	Average	243	263	2	11510.00	65.70	74.00	-8.30	56.25	9.45	Peak	243	263	3	17265.00	53.94	68.20	-14.26	44.91	9.03	Peak	100	217
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11510.00	51.88	54.00	-2.12	42.43	9.45	Average	243	263																																		
2	11510.00	65.70	74.00	-8.30	56.25	9.45	Peak	243	263																																		
3	17265.00	53.94	68.20	-14.26	44.91	9.03	Peak	100	217																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											

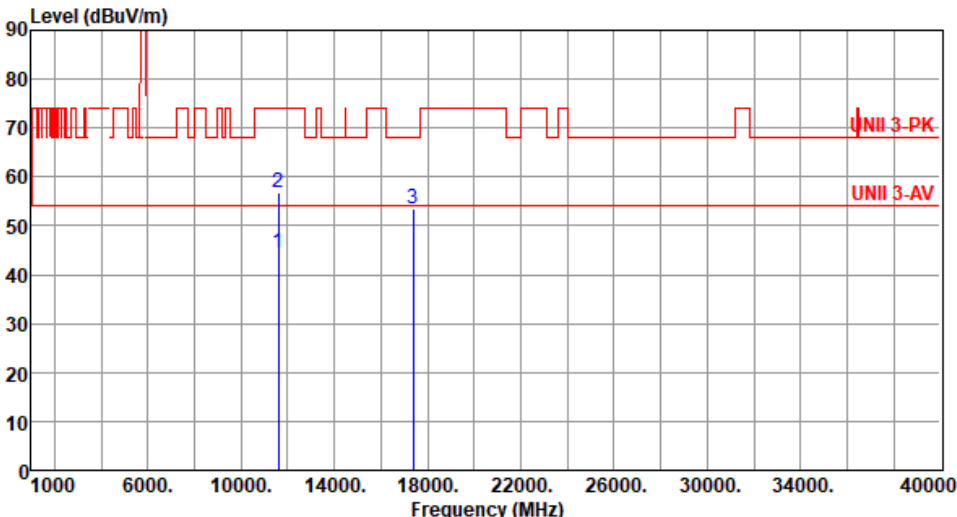

Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5795																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11590.00</td><td>44.39</td><td>54.00</td><td>-9.61</td><td>35.27</td><td>9.12</td><td>Average</td><td>209</td><td>217</td></tr><tr><td>2</td><td>11590.00</td><td>56.81</td><td>74.00</td><td>-17.19</td><td>47.69</td><td>9.12</td><td>Peak</td><td>209</td><td>217</td></tr><tr><td>3</td><td>17385.00</td><td>53.33</td><td>68.20</td><td>-14.87</td><td>44.02</td><td>9.31</td><td>Peak</td><td>100</td><td>180</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11590.00	44.39	54.00	-9.61	35.27	9.12	Average	209	217	2	11590.00	56.81	74.00	-17.19	47.69	9.12	Peak	209	217	3	17385.00	53.33	68.20	-14.87	44.02	9.31	Peak	100	180
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11590.00	44.39	54.00	-9.61	35.27	9.12	Average	209	217																																		
2	11590.00	56.81	74.00	-17.19	47.69	9.12	Peak	209	217																																		
3	17385.00	53.33	68.20	-14.87	44.02	9.31	Peak	100	180																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											

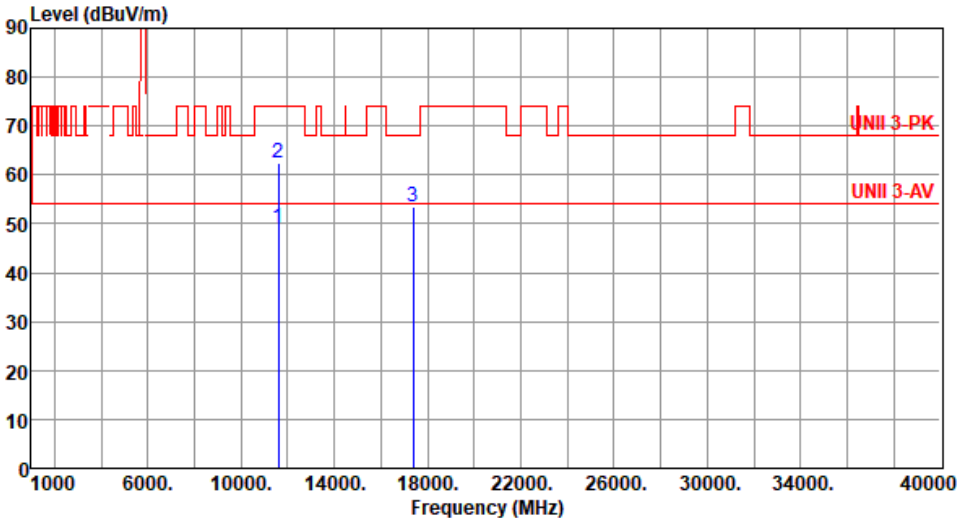

Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5795																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11590.00</td><td>49.29</td><td>54.00</td><td>-4.71</td><td>40.17</td><td>9.12</td><td>Average</td><td>230</td><td>276</td></tr><tr><td>2</td><td>11590.00</td><td>62.55</td><td>74.00</td><td>-11.45</td><td>53.43</td><td>9.12</td><td>Peak</td><td>230</td><td>276</td></tr><tr><td>3</td><td>17385.00</td><td>53.32</td><td>68.20</td><td>-14.88</td><td>44.01</td><td>9.31</td><td>Peak</td><td>100</td><td>233</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11590.00	49.29	54.00	-4.71	40.17	9.12	Average	230	276	2	11590.00	62.55	74.00	-11.45	53.43	9.12	Peak	230	276	3	17385.00	53.32	68.20	-14.88	44.01	9.31	Peak	100	233
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11590.00	49.29	54.00	-4.71	40.17	9.12	Average	230	276																																		
2	11590.00	62.55	74.00	-11.45	53.43	9.12	Peak	230	276																																		
3	17385.00	53.32	68.20	-14.88	44.01	9.31	Peak	100	233																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5210																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10420.00</td><td>58.42</td><td>68.20</td><td>-9.78</td><td>49.37</td><td>9.05</td><td>Peak</td><td>216</td><td>338</td></tr><tr><td>2</td><td>15630.00</td><td>37.61</td><td>54.00</td><td>-16.39</td><td>31.24</td><td>6.37</td><td>Average</td><td>100</td><td>277</td></tr><tr><td>3</td><td>15630.00</td><td>49.76</td><td>74.00</td><td>-24.24</td><td>43.39</td><td>6.37</td><td>Peak</td><td>100</td><td>277</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10420.00	58.42	68.20	-9.78	49.37	9.05	Peak	216	338	2	15630.00	37.61	54.00	-16.39	31.24	6.37	Average	100	277	3	15630.00	49.76	74.00	-24.24	43.39	6.37	Peak	100	277
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10420.00	58.42	68.20	-9.78	49.37	9.05	Peak	216	338																																		
2	15630.00	37.61	54.00	-16.39	31.24	6.37	Average	100	277																																		
3	15630.00	49.76	74.00	-24.24	43.39	6.37	Peak	100	277																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5210																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10420.00</td><td>60.88</td><td>68.20</td><td>-7.32</td><td>51.83</td><td>9.05</td><td>Peak</td><td>237</td><td>268</td></tr><tr><td>2</td><td>15630.00</td><td>37.70</td><td>54.00</td><td>-16.30</td><td>31.33</td><td>6.37</td><td>Average</td><td>100</td><td>333</td></tr><tr><td>3</td><td>15630.00</td><td>49.59</td><td>74.00</td><td>-24.41</td><td>43.22</td><td>6.37</td><td>Peak</td><td>100</td><td>333</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10420.00	60.88	68.20	-7.32	51.83	9.05	Peak	237	268	2	15630.00	37.70	54.00	-16.30	31.33	6.37	Average	100	333	3	15630.00	49.59	74.00	-24.41	43.22	6.37	Peak	100	333
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10420.00	60.88	68.20	-7.32	51.83	9.05	Peak	237	268																																		
2	15630.00	37.70	54.00	-16.30	31.33	6.37	Average	100	333																																		
3	15630.00	49.59	74.00	-24.41	43.22	6.37	Peak	100	333																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5290
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):63			
Level (dBuV/m)			




Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5290
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):63			
Level (dBuV/m)			




Unwanted Emissions

Appendix D

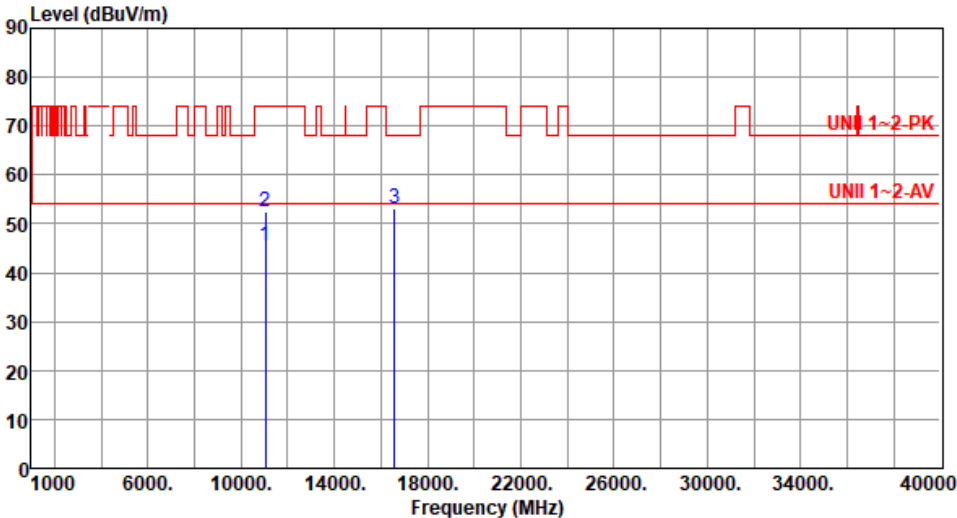Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5530																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):63																																											
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11060.00</td><td>45.65</td><td>54.00</td><td>-8.35</td><td>36.30</td><td>9.35</td><td>Average</td><td>126</td><td>151</td></tr><tr><td>2</td><td>11060.00</td><td>52.61</td><td>74.00</td><td>-21.39</td><td>43.26</td><td>9.35</td><td>Peak</td><td>126</td><td>151</td></tr><tr><td>3</td><td>16590.00</td><td>53.07</td><td>68.20</td><td>-15.13</td><td>44.14</td><td>8.93</td><td>Peak</td><td>100</td><td>243</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11060.00	45.65	54.00	-8.35	36.30	9.35	Average	126	151	2	11060.00	52.61	74.00	-21.39	43.26	9.35	Peak	126	151	3	16590.00	53.07	68.20	-15.13	44.14	8.93	Peak	100	243
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11060.00	45.65	54.00	-8.35	36.30	9.35	Average	126	151																																		
2	11060.00	52.61	74.00	-21.39	43.26	9.35	Peak	126	151																																		
3	16590.00	53.07	68.20	-15.13	44.14	8.93	Peak	100	243																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											

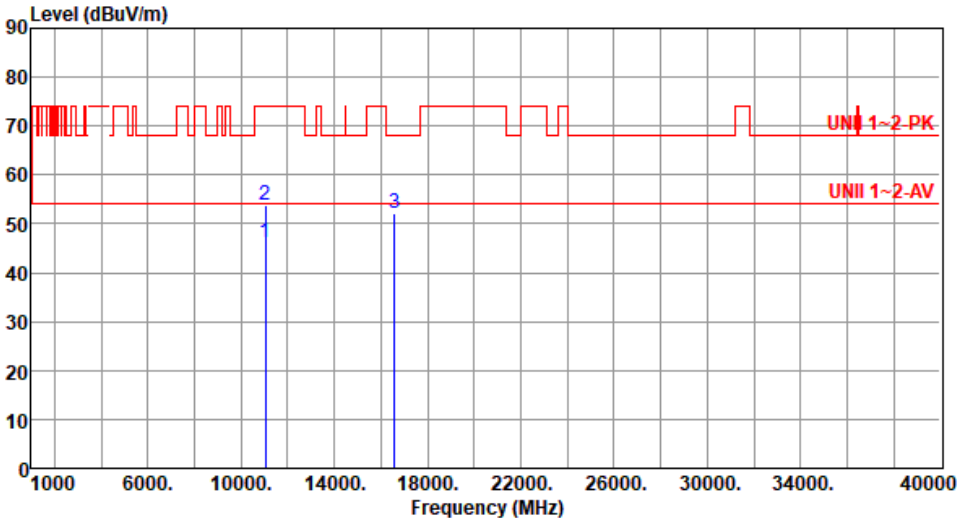

Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5530																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11060.00</td><td>46.03</td><td>54.00</td><td>-7.97</td><td>36.68</td><td>9.35</td><td>Average</td><td>225</td><td>212</td></tr><tr><td>2</td><td>11060.00</td><td>53.85</td><td>74.00</td><td>-20.15</td><td>44.50</td><td>9.35</td><td>Peak</td><td>225</td><td>212</td></tr><tr><td>3</td><td>16590.00</td><td>52.24</td><td>68.20</td><td>-15.96</td><td>43.31</td><td>8.93</td><td>Peak</td><td>100</td><td>324</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11060.00	46.03	54.00	-7.97	36.68	9.35	Average	225	212	2	11060.00	53.85	74.00	-20.15	44.50	9.35	Peak	225	212	3	16590.00	52.24	68.20	-15.96	43.31	8.93	Peak	100	324
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11060.00	46.03	54.00	-7.97	36.68	9.35	Average	225	212																																		
2	11060.00	53.85	74.00	-20.15	44.50	9.35	Peak	225	212																																		
3	16590.00	52.24	68.20	-15.96	43.31	8.93	Peak	100	324																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5610																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):63																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11220.00</td><td>41.13</td><td>54.00</td><td>-12.87</td><td>32.33</td><td>8.80</td><td>Average</td><td>125</td><td>155</td></tr><tr><td>2</td><td>11220.00</td><td>51.76</td><td>74.00</td><td>-22.24</td><td>42.96</td><td>8.80</td><td>Peak</td><td>125</td><td>155</td></tr><tr><td>3</td><td>16830.00</td><td>54.04</td><td>68.20</td><td>-14.16</td><td>43.96</td><td>10.08</td><td>Peak</td><td>100</td><td>174</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11220.00	41.13	54.00	-12.87	32.33	8.80	Average	125	155	2	11220.00	51.76	74.00	-22.24	42.96	8.80	Peak	125	155	3	16830.00	54.04	68.20	-14.16	43.96	10.08	Peak	100	174
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11220.00	41.13	54.00	-12.87	32.33	8.80	Average	125	155																																		
2	11220.00	51.76	74.00	-22.24	42.96	8.80	Peak	125	155																																		
3	16830.00	54.04	68.20	-14.16	43.96	10.08	Peak	100	174																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5610																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):63																																											
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11220.00</td><td>42.95</td><td>54.00</td><td>-11.05</td><td>34.15</td><td>8.80</td><td>Average</td><td>204</td><td>121</td></tr><tr><td>2</td><td>11220.00</td><td>51.01</td><td>74.00</td><td>-22.99</td><td>42.21</td><td>8.80</td><td>Peak</td><td>204</td><td>121</td></tr><tr><td>3</td><td>16830.00</td><td>53.34</td><td>68.20</td><td>-14.86</td><td>43.26</td><td>10.08</td><td>Peak</td><td>100</td><td>285</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11220.00	42.95	54.00	-11.05	34.15	8.80	Average	204	121	2	11220.00	51.01	74.00	-22.99	42.21	8.80	Peak	204	121	3	16830.00	53.34	68.20	-14.86	43.26	10.08	Peak	100	285
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11220.00	42.95	54.00	-11.05	34.15	8.80	Average	204	121																																		
2	11220.00	51.01	74.00	-22.99	42.21	8.80	Peak	204	121																																		
3	16830.00	53.34	68.20	-14.86	43.26	10.08	Peak	100	285																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5775																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11550.00</td><td>43.79</td><td>54.00</td><td>-10.21</td><td>34.43</td><td>9.36</td><td>Average</td><td>321</td><td>2</td></tr><tr><td>2</td><td>11550.00</td><td>56.94</td><td>74.00</td><td>-17.06</td><td>47.58</td><td>9.36</td><td>Peak</td><td>321</td><td>2</td></tr><tr><td>3</td><td>17325.00</td><td>53.95</td><td>68.20</td><td>-14.25</td><td>44.88</td><td>9.07</td><td>Peak</td><td>100</td><td>184</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11550.00	43.79	54.00	-10.21	34.43	9.36	Average	321	2	2	11550.00	56.94	74.00	-17.06	47.58	9.36	Peak	321	2	3	17325.00	53.95	68.20	-14.25	44.88	9.07	Peak	100	184
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11550.00	43.79	54.00	-10.21	34.43	9.36	Average	321	2																																		
2	11550.00	56.94	74.00	-17.06	47.58	9.36	Peak	321	2																																		
3	17325.00	53.95	68.20	-14.25	44.88	9.07	Peak	100	184																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5775
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			



Unwanted Emissions

Appendix D

Modulation	be EHT160_OFDMA	Test Freq. (MHz)	5250
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) </			




Modulation	be EHT160_OFDMA	Test Freq. (MHz)	5250																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10500.00</td><td>52.32</td><td>68.20</td><td>-15.88</td><td>43.46</td><td>8.86</td><td>Peak</td><td>182</td><td>77</td></tr><tr><td>2</td><td>15750.00</td><td>37.42</td><td>54.00</td><td>-16.58</td><td>30.82</td><td>6.60</td><td>Average</td><td>100</td><td>148</td></tr><tr><td>3</td><td>15750.00</td><td>49.38</td><td>74.00</td><td>-24.62</td><td>42.78</td><td>6.60</td><td>Peak</td><td>100</td><td>148</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10500.00	52.32	68.20	-15.88	43.46	8.86	Peak	182	77	2	15750.00	37.42	54.00	-16.58	30.82	6.60	Average	100	148	3	15750.00	49.38	74.00	-24.62	42.78	6.60	Peak	100	148
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10500.00	52.32	68.20	-15.88	43.46	8.86	Peak	182	77																																		
2	15750.00	37.42	54.00	-16.58	30.82	6.60	Average	100	148																																		
3	15750.00	49.38	74.00	-24.62	42.78	6.60	Peak	100	148																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											




Unwanted Emissions

Appendix D

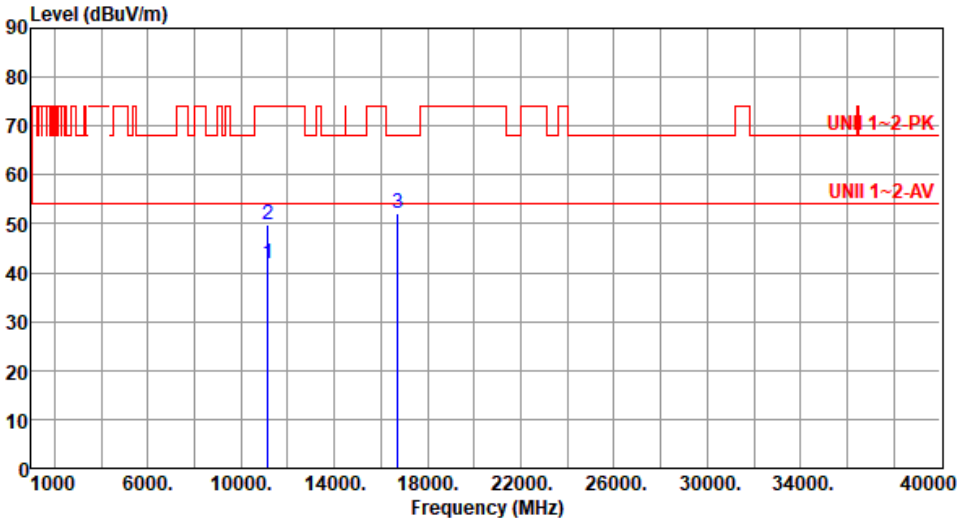Modulation	be EHT160_OFDMA	Test Freq. (MHz)	5570																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11140.00</td><td>41.76</td><td>54.00</td><td>-12.24</td><td>32.77</td><td>8.99</td><td>Average</td><td>123</td><td>150</td></tr><tr><td>2</td><td>11140.00</td><td>49.92</td><td>74.00</td><td>-24.08</td><td>40.93</td><td>8.99</td><td>Peak</td><td>123</td><td>150</td></tr><tr><td>3</td><td>16710.00</td><td>52.11</td><td>68.20</td><td>-16.09</td><td>42.78</td><td>9.33</td><td>Peak</td><td>100</td><td>311</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	11140.00	41.76	54.00	-12.24	32.77	8.99	Average	123	150	2	11140.00	49.92	74.00	-24.08	40.93	8.99	Peak	123	150	3	16710.00	52.11	68.20	-16.09	42.78	9.33	Peak	100	311
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																												
1	11140.00	41.76	54.00	-12.24	32.77	8.99	Average	123	150																																												
2	11140.00	49.92	74.00	-24.08	40.93	8.99	Peak	123	150																																												
3	16710.00	52.11	68.20	-16.09	42.78	9.33	Peak	100	311																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					

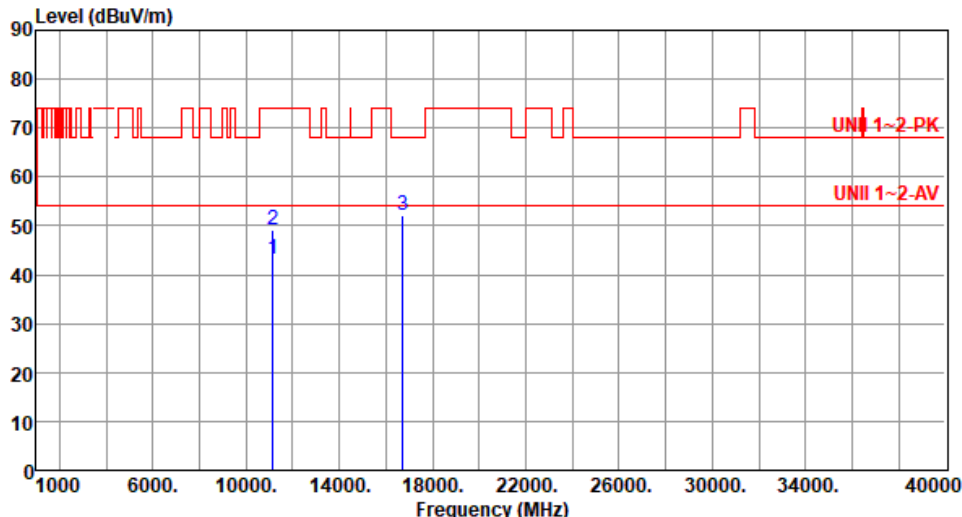

Modulation	be EHT160_OFDMA	Test Freq. (MHz)	5570																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11140.00</td><td>43.17</td><td>54.00</td><td>-10.83</td><td>34.18</td><td>8.99</td><td>Average</td><td>224</td><td>216</td></tr><tr><td>2</td><td>11140.00</td><td>49.30</td><td>74.00</td><td>-24.70</td><td>40.31</td><td>8.99</td><td>Peak</td><td>224</td><td>216</td></tr><tr><td>3</td><td>16710.00</td><td>52.17</td><td>68.20</td><td>-16.03</td><td>42.84</td><td>9.33</td><td>Peak</td><td>100</td><td>276</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11140.00	43.17	54.00	-10.83	34.18	8.99	Average	224	216	2	11140.00	49.30	74.00	-24.70	40.31	8.99	Peak	224	216	3	16710.00	52.17	68.20	-16.03	42.84	9.33	Peak	100	276
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11140.00	43.17	54.00	-10.83	34.18	8.99	Average	224	216																																		
2	11140.00	49.30	74.00	-24.70	40.31	8.99	Peak	224	216																																		
3	16710.00	52.17	68.20	-16.03	42.84	9.33	Peak	100	276																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement


Appendix D

Modulation	11a	Test Freq. (MHz)	5180																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5136.60</td><td>61.21</td><td>74.00</td><td>-12.79</td><td>59.25</td><td>1.96</td><td>Peak</td><td>241</td><td>250</td></tr><tr><td>2</td><td>5379.90</td><td>59.19</td><td>74.00</td><td>-14.81</td><td>57.70</td><td>1.49</td><td>Peak</td><td>241</td><td>250</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5136.60	61.21	74.00	-12.79	59.25	1.96	Peak	241	250	2	5379.90	59.19	74.00	-14.81	57.70	1.49	Peak	241	250
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5136.60	61.21	74.00	-12.79	59.25	1.96	Peak	241	250																								
2	5379.90	59.19	74.00	-14.81	57.70	1.49	Peak	241	250																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

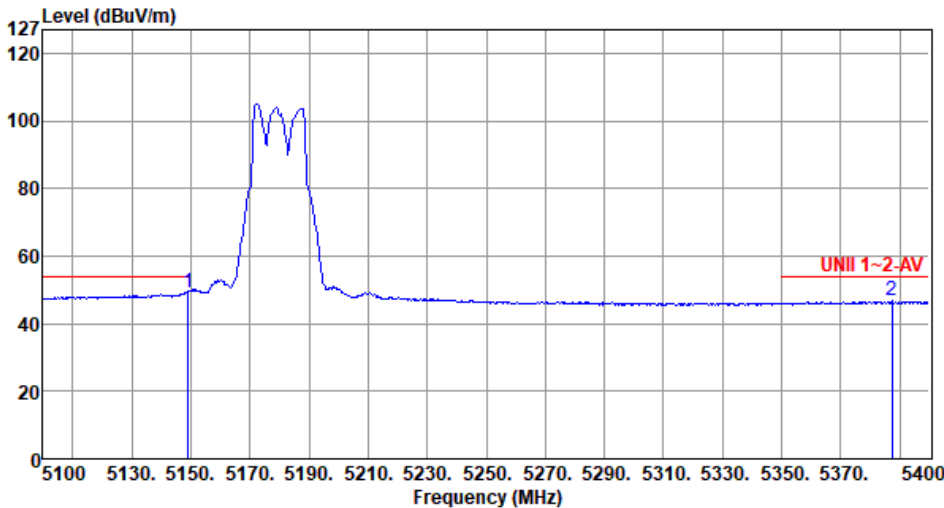Modulation	11a	Test Freq. (MHz)	5180																																																		
Polarization	Horizontal-Average																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.20</td><td>49.26</td><td>54.00</td><td>-4.74</td><td>47.26</td><td>2.00</td><td>Average</td><td>241</td><td>250</td></tr><tr><td>2</td><td>5387.40</td><td>46.73</td><td>54.00</td><td>-7.27</td><td>45.22</td><td>1.51</td><td>Average</td><td>241</td><td>250</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	5149.20	49.26	54.00	-4.74	47.26	2.00	Average	241	250	2	5387.40	46.73	54.00	-7.27	45.22	1.51	Average	241	250
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																												
		dBUV/m			dBUV			cm	deg																																												
1	5149.20	49.26	54.00	-4.74	47.26	2.00	Average	241	250																																												
2	5387.40	46.73	54.00	-7.27	45.22	1.51	Average	241	250																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

Appendix D

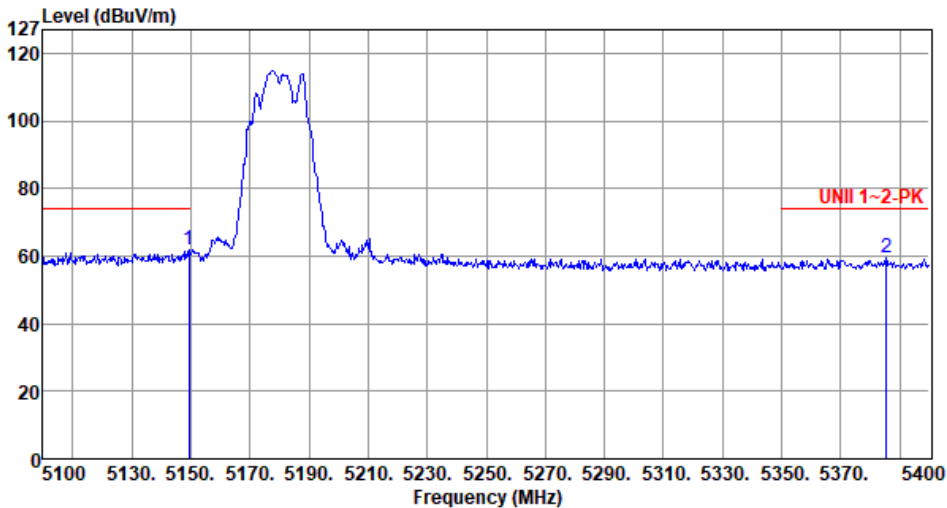Modulation	11a	Test Freq. (MHz)	5180																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.50</td><td>61.80</td><td>74.00</td><td>-12.20</td><td>59.80</td><td>2.00</td><td>Peak</td><td>229</td><td>247</td></tr><tr><td>2</td><td>5385.30</td><td>59.65</td><td>74.00</td><td>-14.35</td><td>58.14</td><td>1.51</td><td>Peak</td><td>229</td><td>247</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5149.50	61.80	74.00	-12.20	59.80	2.00	Peak	229	247	2	5385.30	59.65	74.00	-14.35	58.14	1.51	Peak	229	247
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	5149.50	61.80	74.00	-12.20	59.80	2.00	Peak	229	247																																		
2	5385.30	59.65	74.00	-14.35	58.14	1.51	Peak	229	247																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5180																														
Polarization	Vertical-Average																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m) UNII 1~2-AV 2 Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.80</td><td>49.43</td><td>54.00</td><td>-4.57</td><td>47.43</td><td>2.00</td><td>Average</td><td>229</td><td>247</td></tr><tr><td>2</td><td>5394.00</td><td>46.94</td><td>54.00</td><td>-7.06</td><td>45.41</td><td>1.53</td><td>Average</td><td>229</td><td>247</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	49.43	54.00	-4.57	47.43	2.00	Average	229	247	2	5394.00	46.94	54.00	-7.06	45.41	1.53	Average	229	247
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	49.43	54.00	-4.57	47.43	2.00	Average	229	247																								
2	5394.00	46.94	54.00	-7.06	45.41	1.53	Average	229	247																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5200																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):23 Humidity(%):66																																	
Level (dBuV/m) UNII 1-2-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5146.20</td><td>57.50</td><td>74.00</td><td>-16.50</td><td>55.51</td><td>1.99</td><td>Peak</td><td>316</td><td>188</td></tr><tr><td>2</td><td>5363.40</td><td>55.01</td><td>74.00</td><td>-18.99</td><td>53.56</td><td>1.45</td><td>Peak</td><td>316</td><td>188</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5146.20	57.50	74.00	-16.50	55.51	1.99	Peak	316	188	2	5363.40	55.01	74.00	-18.99	53.56	1.45	Peak	316	188
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5146.20	57.50	74.00	-16.50	55.51	1.99	Peak	316	188																								
2	5363.40	55.01	74.00	-18.99	53.56	1.45	Peak	316	188																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5200
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):66			
Level (dBuV/m) <			



Band Edge measurement


Appendix D

Modulation	11a	Test Freq. (MHz)	5200																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):23 Humidity(%):66																																	
Level (dBUV/m) UNII 1-2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.80</td><td>58.82</td><td>74.00</td><td>-15.18</td><td>56.82</td><td>2.00</td><td>Peak</td><td>150</td><td>254</td></tr><tr><td>2</td><td>5396.40</td><td>54.79</td><td>74.00</td><td>-19.21</td><td>53.25</td><td>1.54</td><td>Peak</td><td>150</td><td>254</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	58.82	74.00	-15.18	56.82	2.00	Peak	150	254	2	5396.40	54.79	74.00	-19.21	53.25	1.54	Peak	150	254
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	58.82	74.00	-15.18	56.82	2.00	Peak	150	254																								
2	5396.40	54.79	74.00	-19.21	53.25	1.54	Peak	150	254																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement


Appendix D

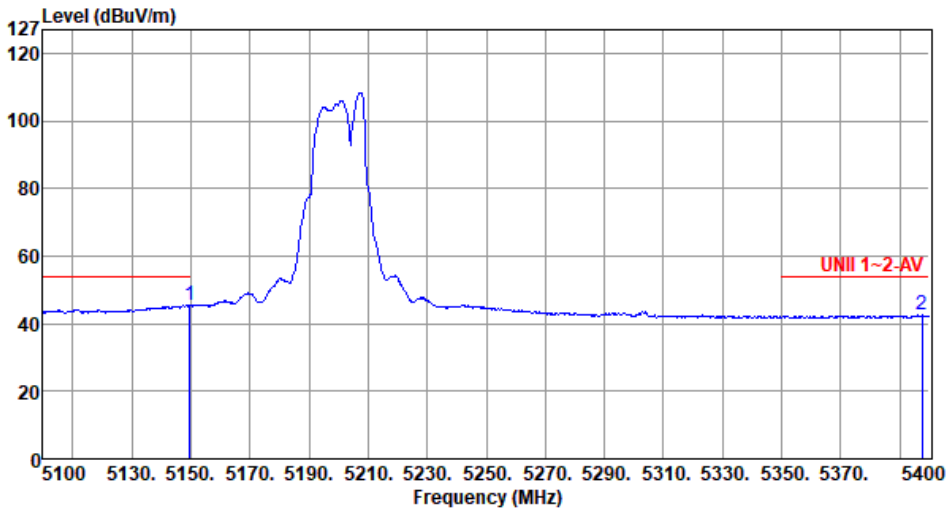Modulation	11a	Test Freq. (MHz)	5200																																																		
Polarization	Vertical-Average																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):66																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.80</td><td>45.59</td><td>54.00</td><td>-8.41</td><td>43.59</td><td>2.00</td><td>Average</td><td>150</td><td>254</td></tr><tr><td>2</td><td>5397.60</td><td>42.53</td><td>54.00</td><td>-11.47</td><td>40.98</td><td>1.55</td><td>Average</td><td>150</td><td>254</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5149.80	45.59	54.00	-8.41	43.59	2.00	Average	150	254	2	5397.60	42.53	54.00	-11.47	40.98	1.55	Average	150	254
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5149.80	45.59	54.00	-8.41	43.59	2.00	Average	150	254																																												
2	5397.60	42.53	54.00	-11.47	40.98	1.55	Average	150	254																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

Appendix D

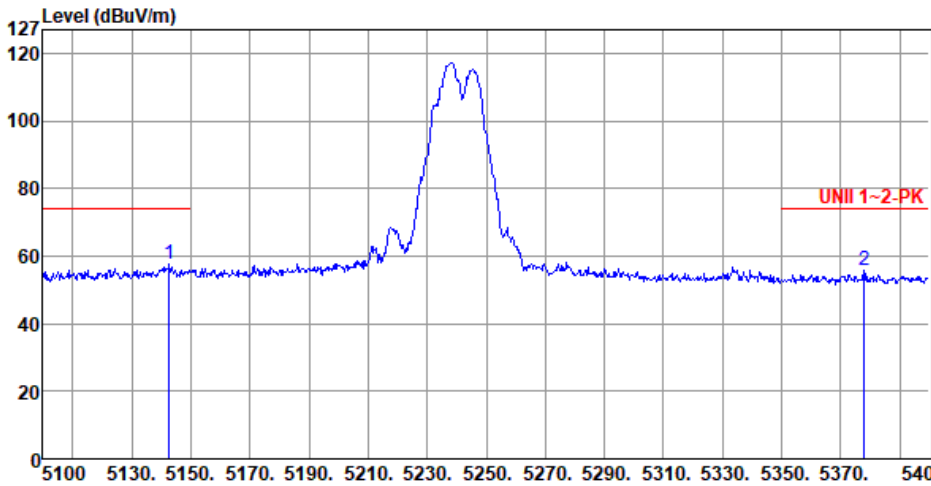Modulation	11a	Test Freq. (MHz)	5240																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):23 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5142.60</td><td>57.46</td><td>74.00</td><td>-16.54</td><td>55.47</td><td>1.99</td><td>Peak</td><td>256</td><td>188</td></tr><tr><td>2</td><td>5377.80</td><td>55.86</td><td>74.00</td><td>-18.14</td><td>54.37</td><td>1.49</td><td>Peak</td><td>256</td><td>188</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5142.60	57.46	74.00	-16.54	55.47	1.99	Peak	256	188	2	5377.80	55.86	74.00	-18.14	54.37	1.49	Peak	256	188
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5142.60	57.46	74.00	-16.54	55.47	1.99	Peak	256	188																								
2	5377.80	55.86	74.00	-18.14	54.37	1.49	Peak	256	188																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5240						
Polarization	Horizontal-Average								
Test By :Akun Chung- Temperature(°C):23 Humidity(%):66									
Level (dBUV/m) 1 2 UNII 1~2-AV Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1	5141.70	45.08	54.00	-8.92	43.10	1.98	Average	256	188
2	5362.80	42.47	54.00	-11.53	41.02	1.45	Average	256	188

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Band Edge measurement


Appendix D

Modulation	11a	Test Freq. (MHz)	5240																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):23 Humidity(%):66																																	
Level (dBUV/m) UNII 1-2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5138.10</td><td>56.01</td><td>74.00</td><td>-17.99</td><td>54.03</td><td>1.98</td><td>Peak</td><td>154</td><td>254</td></tr><tr><td>2</td><td>5357.40</td><td>55.45</td><td>74.00</td><td>-18.55</td><td>54.02</td><td>1.43</td><td>Peak</td><td>154</td><td>254</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5138.10	56.01	74.00	-17.99	54.03	1.98	Peak	154	254	2	5357.40	55.45	74.00	-18.55	54.02	1.43	Peak	154	254
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5138.10	56.01	74.00	-17.99	54.03	1.98	Peak	154	254																								
2	5357.40	55.45	74.00	-18.55	54.02	1.43	Peak	154	254																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

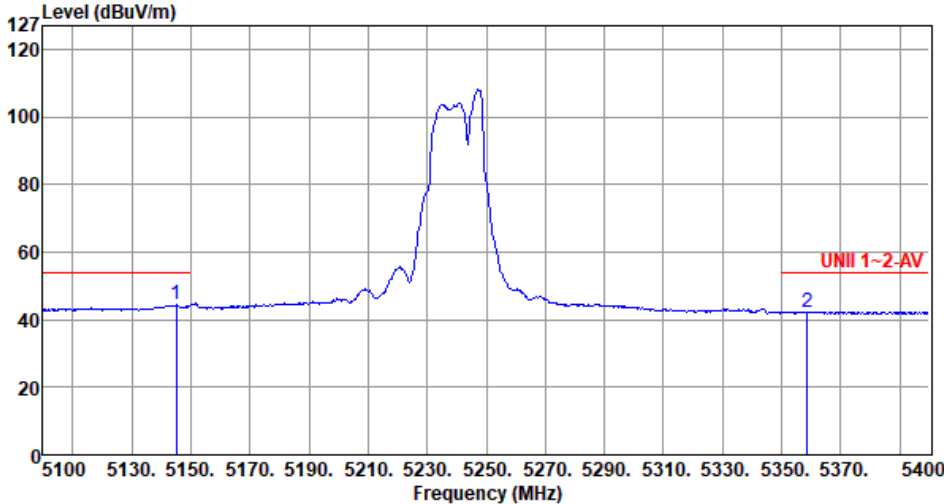Modulation	11a	Test Freq. (MHz)	5240																																																		
Polarization	Vertical-Average																																																				
Test By :Akun Chung- Temperature(°C):23 Humidity(%):66																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5145.00</td><td>44.41</td><td>54.00</td><td>-9.59</td><td>42.42</td><td>1.99</td><td>Average</td><td>154</td><td>254</td></tr><tr><td>2</td><td>5358.60</td><td>42.37</td><td>54.00</td><td>-11.63</td><td>40.93</td><td>1.44</td><td>Average</td><td>154</td><td>254</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBuV			cm	deg	1	5145.00	44.41	54.00	-9.59	42.42	1.99	Average	154	254	2	5358.60	42.37	54.00	-11.63	40.93	1.44	Average	154	254
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																												
		dBUV/m			dBuV			cm	deg																																												
1	5145.00	44.41	54.00	-9.59	42.42	1.99	Average	154	254																																												
2	5358.60	42.37	54.00	-11.63	40.93	1.44	Average	154	254																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement


Appendix D

Modulation	11a	Test Freq. (MHz)	5260																																																		
Polarization	Horizontal-Peak																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
Level (dBuV/m) 127 120 100 80 60 40 20 0 1 2 5100 5130 5150 5170 5190 5210 5230 5250 5270 5290 5310 5330 5350 5370 5400 Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5106.00</td><td>59.96</td><td>74.00</td><td>-14.04</td><td>58.06</td><td>1.90</td><td>Peak</td><td>258</td><td>221</td></tr><tr><td>2</td><td>5379.60</td><td>59.18</td><td>74.00</td><td>-14.82</td><td>57.69</td><td>1.49</td><td>Peak</td><td>258</td><td>221</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5106.00	59.96	74.00	-14.04	58.06	1.90	Peak	258	221	2	5379.60	59.18	74.00	-14.82	57.69	1.49	Peak	258	221
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level			reading			High	Table																																												
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																												
1	5106.00	59.96	74.00	-14.04	58.06	1.90	Peak	258	221																																												
2	5379.60	59.18	74.00	-14.82	57.69	1.49	Peak	258	221																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement


Appendix D

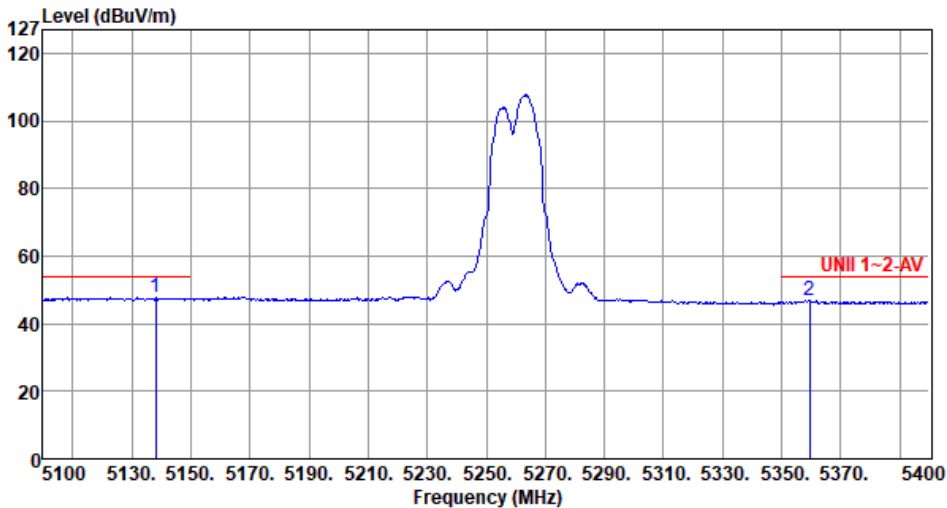Modulation	11a	Test Freq. (MHz)	5260																																																		
Polarization	Horizontal-Average																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5138.10</td><td>47.70</td><td>54.00</td><td>-6.30</td><td>45.72</td><td>1.98</td><td>Average</td><td>258</td><td>221</td></tr><tr><td>2</td><td>5359.50</td><td>46.88</td><td>54.00</td><td>-7.12</td><td>45.44</td><td>1.44</td><td>Average</td><td>258</td><td>221</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5138.10	47.70	54.00	-6.30	45.72	1.98	Average	258	221	2	5359.50	46.88	54.00	-7.12	45.44	1.44	Average	258	221
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5138.10	47.70	54.00	-6.30	45.72	1.98	Average	258	221																																												
2	5359.50	46.88	54.00	-7.12	45.44	1.44	Average	258	221																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

Appendix D

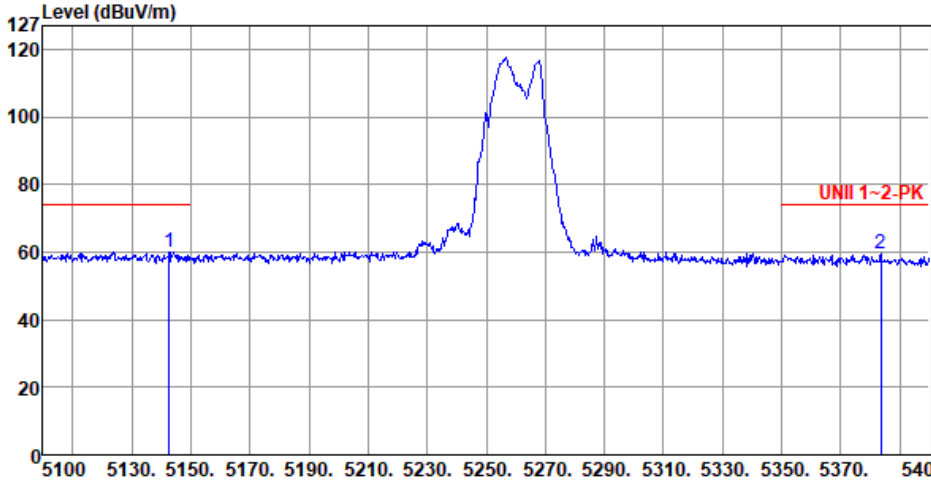Modulation	11a	Test Freq. (MHz)	5260																																																		
Polarization	Vertical-Peak																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5142.60</td><td>60.04</td><td>74.00</td><td>-13.96</td><td>58.05</td><td>1.99</td><td>Peak</td><td>242</td><td>257</td></tr><tr><td>2</td><td>5383.50</td><td>59.64</td><td>74.00</td><td>-14.36</td><td>58.14</td><td>1.50</td><td>Peak</td><td>242</td><td>257</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5142.60	60.04	74.00	-13.96	58.05	1.99	Peak	242	257	2	5383.50	59.64	74.00	-14.36	58.14	1.50	Peak	242	257
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5142.60	60.04	74.00	-13.96	58.05	1.99	Peak	242	257																																												
2	5383.50	59.64	74.00	-14.36	58.14	1.50	Peak	242	257																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5260																														
Polarization	Vertical-Average																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m) UNII 1~2-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5109.90</td><td>47.76</td><td>54.00</td><td>-6.24</td><td>45.85</td><td>1.91</td><td>Average</td><td>242</td><td>257</td></tr><tr><td>2</td><td>5364.60</td><td>47.21</td><td>54.00</td><td>-6.79</td><td>45.76</td><td>1.45</td><td>Average</td><td>242</td><td>257</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5109.90	47.76	54.00	-6.24	45.85	1.91	Average	242	257	2	5364.60	47.21	54.00	-6.79	45.76	1.45	Average	242	257
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5109.90	47.76	54.00	-6.24	45.85	1.91	Average	242	257																								
2	5364.60	47.21	54.00	-6.79	45.76	1.45	Average	242	257																								



Band Edge measurement


Appendix D

Modulation	11a	Test Freq. (MHz)	5300																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m) 127 120 100 80 60 40 20 0 1 2 5100 5130 5150 5170 5190 5210 5230 5250 5270 5290 5310 5330 5350 5370 5400 Frequency (MHz) UNII 1~2-PK <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5116.20</td><td>60.64</td><td>74.00</td><td>-13.36</td><td>58.71</td><td>1.93</td><td>Peak</td><td>249</td><td>218</td></tr><tr><td>2</td><td>5399.70</td><td>59.93</td><td>74.00</td><td>-14.07</td><td>58.38</td><td>1.55</td><td>Peak</td><td>249</td><td>218</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5116.20	60.64	74.00	-13.36	58.71	1.93	Peak	249	218	2	5399.70	59.93	74.00	-14.07	58.38	1.55	Peak	249	218
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	5116.20	60.64	74.00	-13.36	58.71	1.93	Peak	249	218																																		
2	5399.70	59.93	74.00	-14.07	58.38	1.55	Peak	249	218																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement


Appendix D

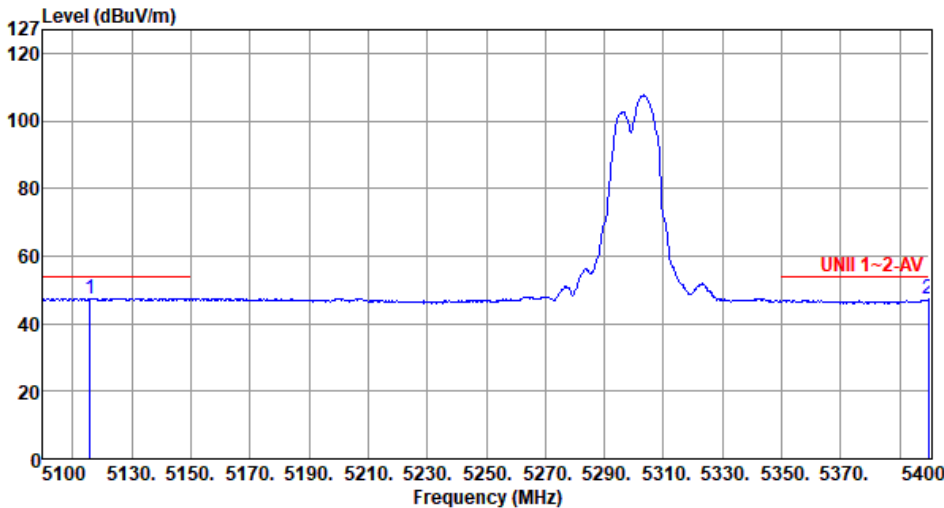Modulation	11a	Test Freq. (MHz)	5300																																																		
Polarization	Horizontal-Average																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5115.90</td><td>47.46</td><td>54.00</td><td>-6.54</td><td>45.53</td><td>1.93</td><td>Average</td><td>249</td><td>218</td></tr><tr><td>2</td><td>5399.70</td><td>47.29</td><td>54.00</td><td>-6.71</td><td>45.74</td><td>1.55</td><td>Average</td><td>249</td><td>218</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5115.90	47.46	54.00	-6.54	45.53	1.93	Average	249	218	2	5399.70	47.29	54.00	-6.71	45.74	1.55	Average	249	218
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5115.90	47.46	54.00	-6.54	45.53	1.93	Average	249	218																																												
2	5399.70	47.29	54.00	-6.71	45.74	1.55	Average	249	218																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement


Appendix D

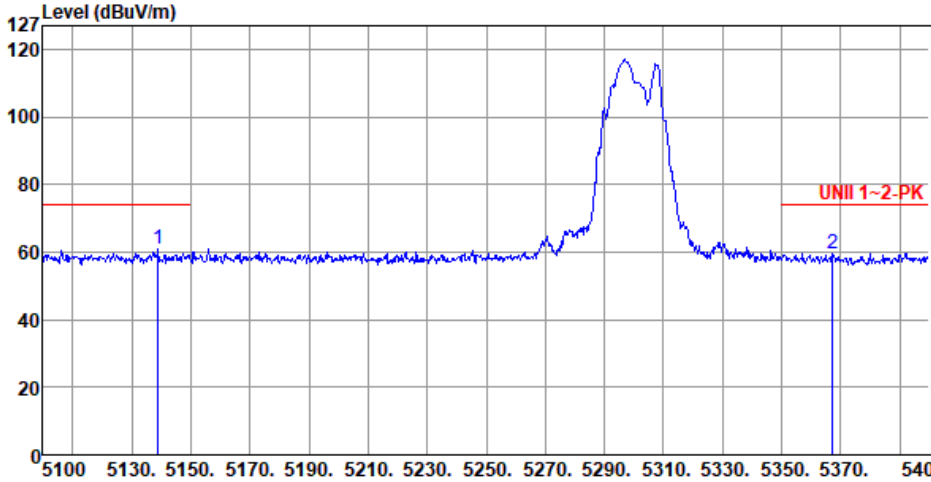Modulation	11a	Test Freq. (MHz)	5300																																																		
Polarization	Vertical-Peak																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>5139.00</td><td>60.72</td><td>74.00</td><td>-13.28</td><td>58.74</td><td>1.98</td><td>Peak</td><td>237</td><td>250</td></tr><tr><td>2</td><td>5367.30</td><td>59.71</td><td>74.00</td><td>-14.29</td><td>58.25</td><td>1.46</td><td>Peak</td><td>237</td><td>250</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	5139.00	60.72	74.00	-13.28	58.74	1.98	Peak	237	250	2	5367.30	59.71	74.00	-14.29	58.25	1.46	Peak	237	250
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
								cm	deg																																												
1	5139.00	60.72	74.00	-13.28	58.74	1.98	Peak	237	250																																												
2	5367.30	59.71	74.00	-14.29	58.25	1.46	Peak	237	250																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

Appendix D

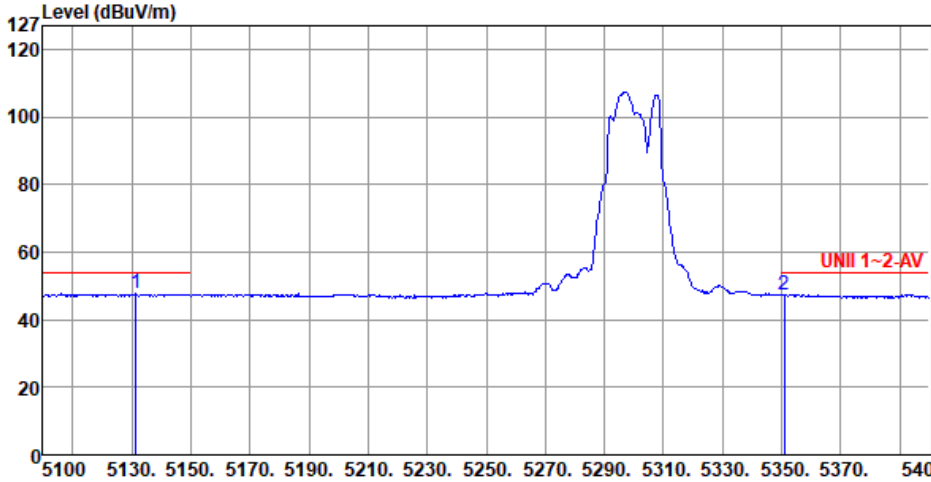Modulation	11a	Test Freq. (MHz)	5300																																																		
Polarization	Vertical-Average																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5131.50</td><td>47.59</td><td>54.00</td><td>-6.41</td><td>45.64</td><td>1.95</td><td>Average</td><td>237</td><td>250</td></tr><tr><td>2</td><td>5350.80</td><td>47.46</td><td>54.00</td><td>-6.54</td><td>46.05</td><td>1.41</td><td>Average</td><td>237</td><td>250</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	5131.50	47.59	54.00	-6.41	45.64	1.95	Average	237	250	2	5350.80	47.46	54.00	-6.54	46.05	1.41	Average	237	250
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																												
		dBUV/m			dBUV			cm	deg																																												
1	5131.50	47.59	54.00	-6.41	45.64	1.95	Average	237	250																																												
2	5350.80	47.46	54.00	-6.54	46.05	1.41	Average	237	250																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5320																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBUV/m) 1 2 UNII 1-2-PK Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBUV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5122.50</td><td>60.49</td><td>74.00</td><td>-13.51</td><td>58.55</td><td>1.94</td><td>Peak</td><td>241</td><td>223</td></tr><tr><td>2</td><td>5351.10</td><td>59.99</td><td>74.00</td><td>-14.01</td><td>58.58</td><td>1.41</td><td>Peak</td><td>241</td><td>223</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBUV	dB/m		cm	deg	1	5122.50	60.49	74.00	-13.51	58.55	1.94	Peak	241	223	2	5351.10	59.99	74.00	-14.01	58.58	1.41	Peak	241	223
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBUV/m	dBUV/m	dB	dBUV	dB/m		cm	deg																																		
1	5122.50	60.49	74.00	-13.51	58.55	1.94	Peak	241	223																																		
2	5351.10	59.99	74.00	-14.01	58.58	1.41	Peak	241	223																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5320																														
Polarization	Horizontal-Average																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5135.10</td><td>47.42</td><td>54.00</td><td>-6.58</td><td>45.46</td><td>1.96</td><td>Average</td><td>241</td><td>223</td></tr><tr><td>2</td><td>5363.10</td><td>47.41</td><td>54.00</td><td>-6.59</td><td>45.96</td><td>1.45</td><td>Average</td><td>241</td><td>223</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5135.10	47.42	54.00	-6.58	45.46	1.96	Average	241	223	2	5363.10	47.41	54.00	-6.59	45.96	1.45	Average	241	223
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5135.10	47.42	54.00	-6.58	45.46	1.96	Average	241	223																								
2	5363.10	47.41	54.00	-6.59	45.96	1.45	Average	241	223																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5320																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBUV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5143.80</td><td>59.74</td><td>74.00</td><td>-14.26</td><td>57.75</td><td>1.99</td><td>Peak</td><td>252</td><td>257</td></tr><tr><td>2</td><td>5355.30</td><td>61.80</td><td>74.00</td><td>-12.20</td><td>60.37</td><td>1.43</td><td>Peak</td><td>252</td><td>257</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBUV	dB/m		cm	deg	1	5143.80	59.74	74.00	-14.26	57.75	1.99	Peak	252	257	2	5355.30	61.80	74.00	-12.20	60.37	1.43	Peak	252	257
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBUV/m	dBUV/m	dB	dBUV	dB/m		cm	deg																																		
1	5143.80	59.74	74.00	-14.26	57.75	1.99	Peak	252	257																																		
2	5355.30	61.80	74.00	-12.20	60.37	1.43	Peak	252	257																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement


Appendix D

Modulation	11a	Test Freq. (MHz)	5320
Polarization	Vertical-Average		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) <			



Band Edge measurement

Appendix D

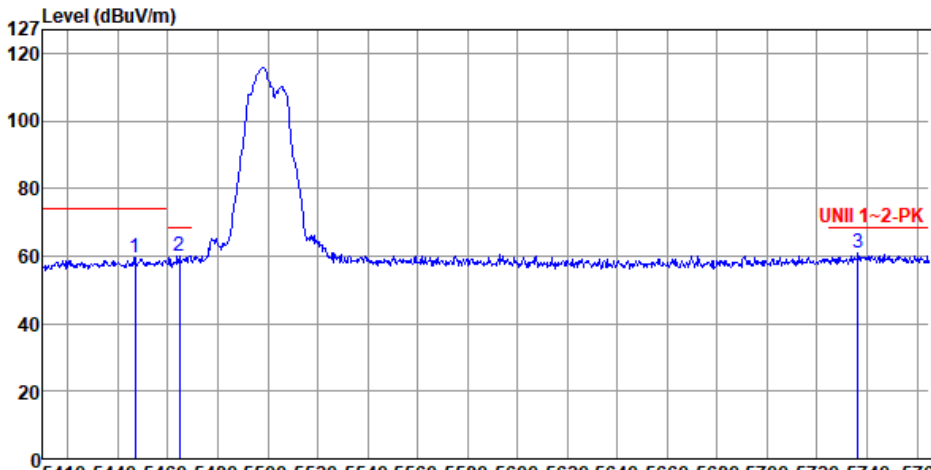Modulation	11a	Test Freq. (MHz)	5500																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5446.92</td><td>59.58</td><td>74.00</td><td>-14.42</td><td>57.93</td><td>1.65</td><td>Peak</td><td>239</td><td>165</td></tr><tr><td>2</td><td>5464.67</td><td>59.94</td><td>68.20</td><td>-8.26</td><td>58.24</td><td>1.70</td><td>Peak</td><td>239</td><td>165</td></tr><tr><td>3</td><td>5736.25</td><td>60.71</td><td>68.20</td><td>-7.49</td><td>58.50</td><td>2.21</td><td>Peak</td><td>239</td><td>165</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5446.92	59.58	74.00	-14.42	57.93	1.65	Peak	239	165	2	5464.67	59.94	68.20	-8.26	58.24	1.70	Peak	239	165	3	5736.25	60.71	68.20	-7.49	58.50	2.21	Peak	239	165
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5446.92	59.58	74.00	-14.42	57.93	1.65	Peak	239	165																																		
2	5464.67	59.94	68.20	-8.26	58.24	1.70	Peak	239	165																																		
3	5736.25	60.71	68.20	-7.49	58.50	2.21	Peak	239	165																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement


Appendix D

Modulation	11a	Test Freq. (MHz)	5500																																								
Polarization	Horizontal-Average																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5457.57</td><td>46.37</td><td>54.00</td><td>-7.63</td><td>44.68</td><td>1.69</td><td>Average</td><td>239</td><td>165</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	5457.57	46.37	54.00	-7.63	44.68	1.69	Average	239	165
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																		
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																		
		dBUV/m			dBUV			cm	deg																																		
1	5457.57	46.37	54.00	-7.63	44.68	1.69	Average	239	165																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement


Appendix D

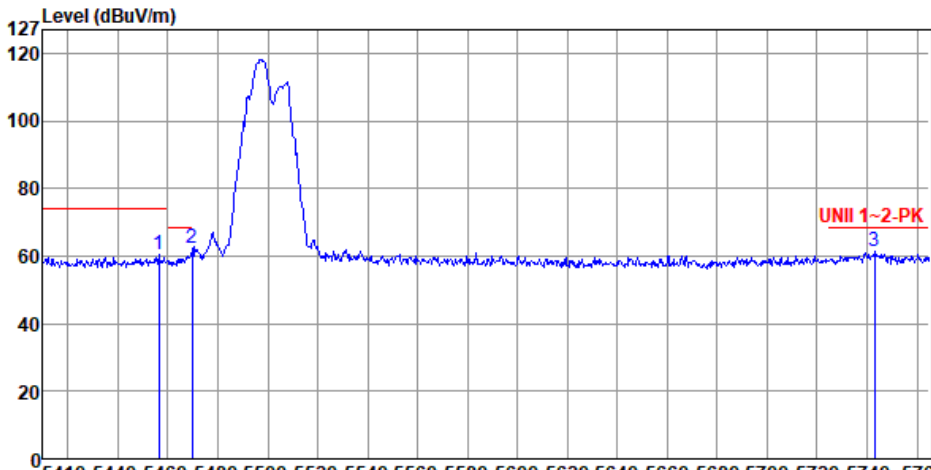Modulation	11a	Test Freq. (MHz)	5500																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5456.51</td><td>60.29</td><td>74.00</td><td>-13.71</td><td>58.61</td><td>1.68</td><td>Peak</td><td>302</td><td>254</td></tr><tr><td>2</td><td>5469.64</td><td>62.30</td><td>68.20</td><td>-5.90</td><td>60.58</td><td>1.72</td><td>Peak</td><td>302</td><td>254</td></tr><tr><td>3</td><td>5742.99</td><td>61.37</td><td>68.20</td><td>-6.83</td><td>59.13</td><td>2.24</td><td>Peak</td><td>302</td><td>254</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5456.51	60.29	74.00	-13.71	58.61	1.68	Peak	302	254	2	5469.64	62.30	68.20	-5.90	60.58	1.72	Peak	302	254	3	5742.99	61.37	68.20	-6.83	59.13	2.24	Peak	302	254
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5456.51	60.29	74.00	-13.71	58.61	1.68	Peak	302	254																																		
2	5469.64	62.30	68.20	-5.90	60.58	1.72	Peak	302	254																																		
3	5742.99	61.37	68.20	-6.83	59.13	2.24	Peak	302	254																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement


Appendix D

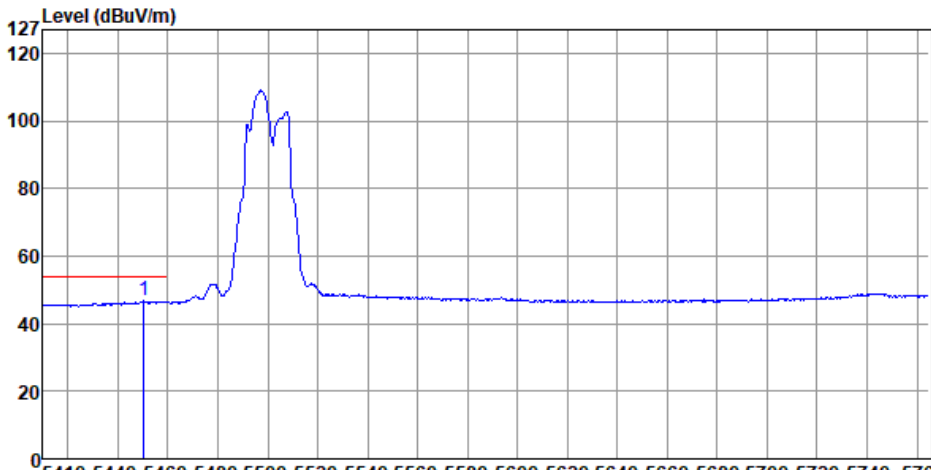Modulation	11a	Test Freq. (MHz)	5500																				
Polarization	Vertical-Average																						
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5450.47</td><td>46.80</td><td>54.00</td><td>-7.20</td><td>45.14</td><td>1.66</td><td>Average</td><td>302</td><td>254</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5450.47	46.80	54.00	-7.20	45.14	1.66	Average	302	254
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5450.47	46.80	54.00	-7.20	45.14	1.66	Average	302	254														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

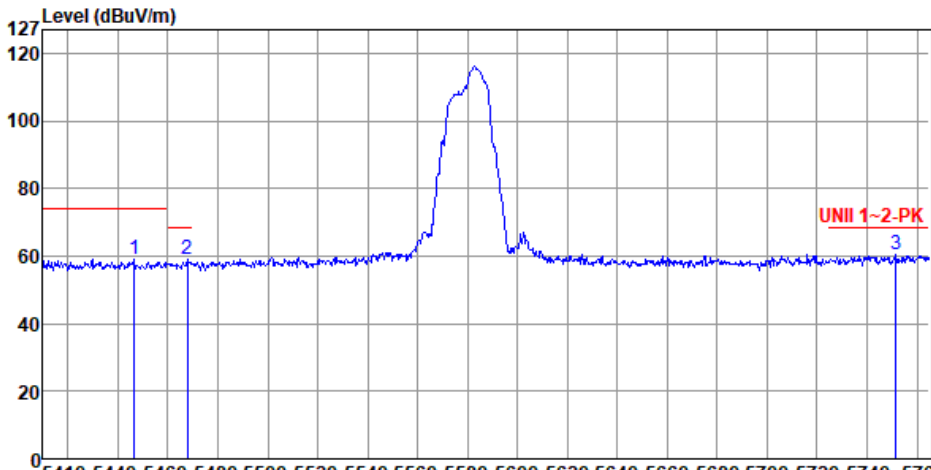Modulation	11a	Test Freq. (MHz)	5580																																																		
Polarization	Horizontal-Peak																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5446.57</td><td>59.06</td><td>74.00</td><td>-14.94</td><td>57.41</td><td>1.65</td><td>Peak</td><td>312</td><td>210</td></tr><tr><td>2</td><td>5467.87</td><td>59.19</td><td>68.20</td><td>-9.01</td><td>57.48</td><td>1.71</td><td>Peak</td><td>312</td><td>210</td></tr><tr><td>3</td><td>5751.51</td><td>60.26</td><td>68.20</td><td>-7.94</td><td>57.98</td><td>2.28</td><td>Peak</td><td>312</td><td>210</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5446.57	59.06	74.00	-14.94	57.41	1.65	Peak	312	210	2	5467.87	59.19	68.20	-9.01	57.48	1.71	Peak	312	210	3	5751.51	60.26	68.20	-7.94	57.98	2.28	Peak	312	210
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																												
1	5446.57	59.06	74.00	-14.94	57.41	1.65	Peak	312	210																																												
2	5467.87	59.19	68.20	-9.01	57.48	1.71	Peak	312	210																																												
3	5751.51	60.26	68.20	-7.94	57.98	2.28	Peak	312	210																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement


Appendix D

Modulation	11a	Test Freq. (MHz)	5580
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			



Band Edge measurement

Appendix D

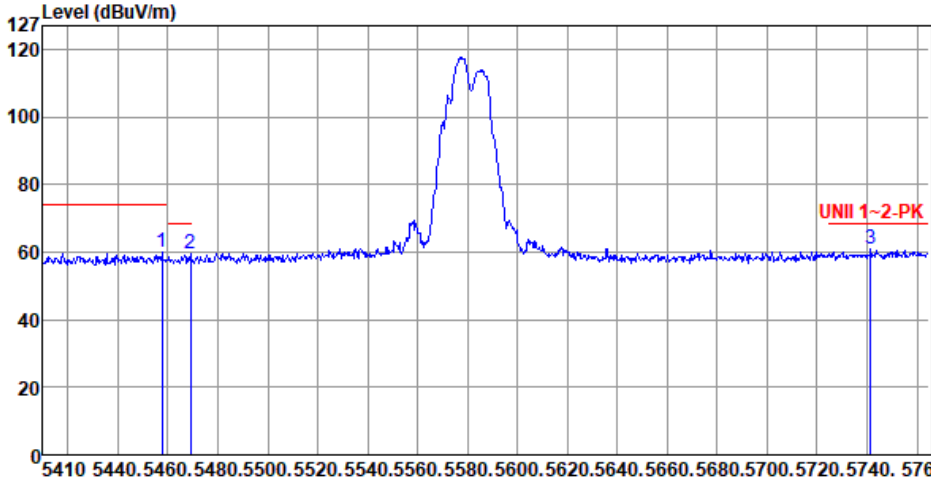Modulation	11a	Test Freq. (MHz)	5580																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5457.57</td><td>59.86</td><td>74.00</td><td>-14.14</td><td>58.17</td><td>1.69</td><td>Peak</td><td>309</td><td>254</td></tr><tr><td>2</td><td>5468.93</td><td>59.72</td><td>68.20</td><td>-8.48</td><td>58.01</td><td>1.71</td><td>Peak</td><td>309</td><td>254</td></tr><tr><td>3</td><td>5741.57</td><td>60.77</td><td>68.20</td><td>-7.43</td><td>58.53</td><td>2.24</td><td>Peak</td><td>309</td><td>254</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5457.57	59.86	74.00	-14.14	58.17	1.69	Peak	309	254	2	5468.93	59.72	68.20	-8.48	58.01	1.71	Peak	309	254	3	5741.57	60.77	68.20	-7.43	58.53	2.24	Peak	309	254
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5457.57	59.86	74.00	-14.14	58.17	1.69	Peak	309	254																																		
2	5468.93	59.72	68.20	-8.48	58.01	1.71	Peak	309	254																																		
3	5741.57	60.77	68.20	-7.43	58.53	2.24	Peak	309	254																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement


Appendix D

Modulation	11a	Test Freq. (MHz)	5580
Polarization	Vertical-Average		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) <			



Band Edge measurement


Appendix D

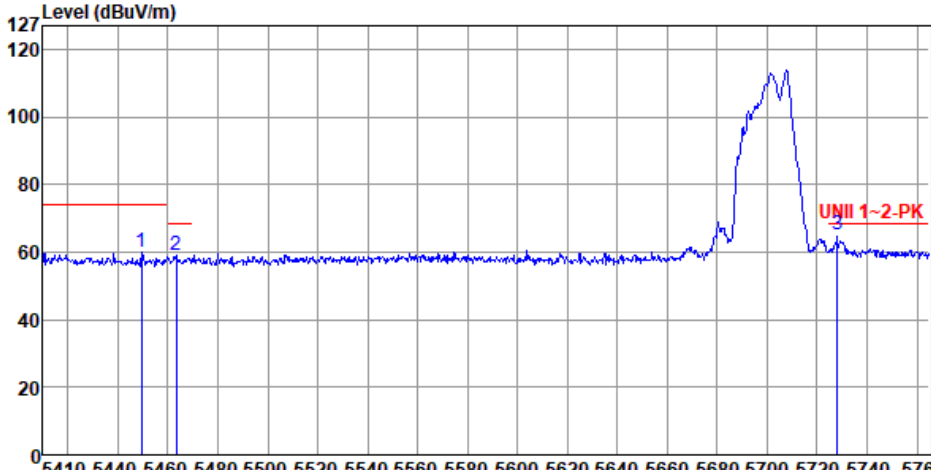Modulation	11a	Test Freq. (MHz)	5700																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5449.41</td><td>60.06</td><td>74.00</td><td>-13.94</td><td>58.40</td><td>1.66</td><td>Peak</td><td>334</td><td>146</td></tr><tr><td>2</td><td>5463.25</td><td>58.89</td><td>68.20</td><td>-9.31</td><td>57.19</td><td>1.70</td><td>Peak</td><td>334</td><td>146</td></tr><tr><td>3</td><td>5728.08</td><td>65.26</td><td>68.20</td><td>-2.94</td><td>63.09</td><td>2.17</td><td>Peak</td><td>334</td><td>146</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5449.41	60.06	74.00	-13.94	58.40	1.66	Peak	334	146	2	5463.25	58.89	68.20	-9.31	57.19	1.70	Peak	334	146	3	5728.08	65.26	68.20	-2.94	63.09	2.17	Peak	334	146
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5449.41	60.06	74.00	-13.94	58.40	1.66	Peak	334	146																																		
2	5463.25	58.89	68.20	-9.31	57.19	1.70	Peak	334	146																																		
3	5728.08	65.26	68.20	-2.94	63.09	2.17	Peak	334	146																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement


Appendix D

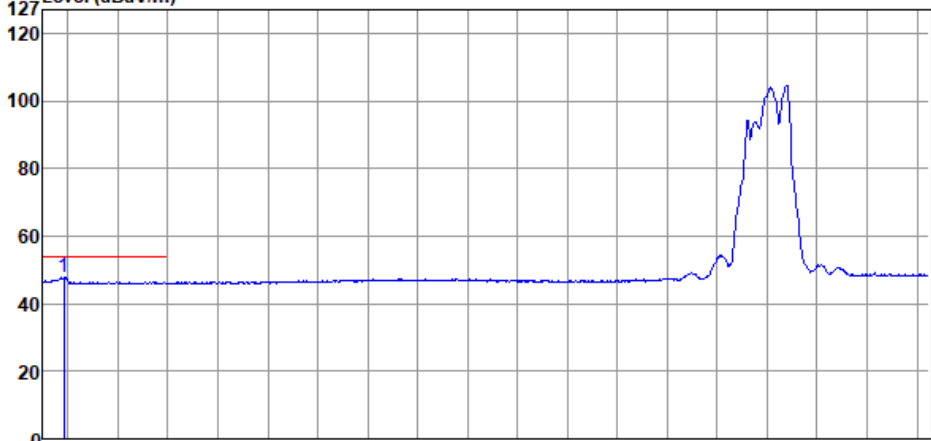Modulation	11a	Test Freq. (MHz)	5700						
Polarization	Horizontal-Average								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5418.52	47.73	54.00	-6.27	46.14	1.59	Average	334	146
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Band Edge measurement

Appendix D

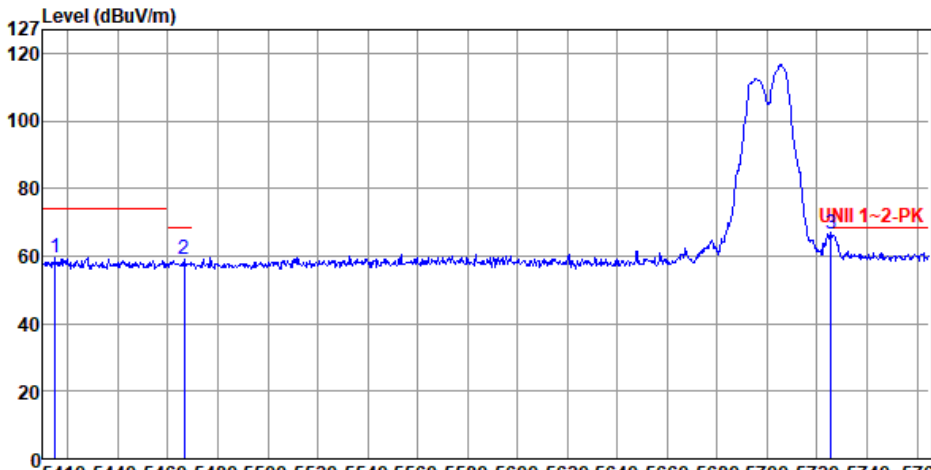Modulation	11a	Test Freq. (MHz)	5700																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5414.97</td><td>59.65</td><td>74.00</td><td>-14.35</td><td>58.07</td><td>1.58</td><td>Peak</td><td>219</td><td>261</td></tr><tr><td>2</td><td>5466.45</td><td>58.84</td><td>68.20</td><td>-9.36</td><td>57.14</td><td>1.70</td><td>Peak</td><td>219</td><td>261</td></tr><tr><td>3</td><td>5725.60</td><td>66.43</td><td>68.20</td><td>-1.77</td><td>64.27</td><td>2.16</td><td>Peak</td><td>219</td><td>261</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5414.97	59.65	74.00	-14.35	58.07	1.58	Peak	219	261	2	5466.45	58.84	68.20	-9.36	57.14	1.70	Peak	219	261	3	5725.60	66.43	68.20	-1.77	64.27	2.16	Peak	219	261
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5414.97	59.65	74.00	-14.35	58.07	1.58	Peak	219	261																																		
2	5466.45	58.84	68.20	-9.36	57.14	1.70	Peak	219	261																																		
3	5725.60	66.43	68.20	-1.77	64.27	2.16	Peak	219	261																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement


Appendix D

Modulation	11a	Test Freq. (MHz)	5700																			
Polarization	Vertical-Average																					
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																						
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5418.52</td><td>47.59</td><td>54.00</td><td>-6.41</td><td>46.00</td><td>1.59</td><td>Average</td><td>219</td><td>261</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).				Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5418.52	47.59	54.00	-6.41	46.00	1.59	Average	219	261
Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5418.52	47.59	54.00	-6.41	46.00	1.59	Average	219	261													



Band Edge measurement


Appendix D

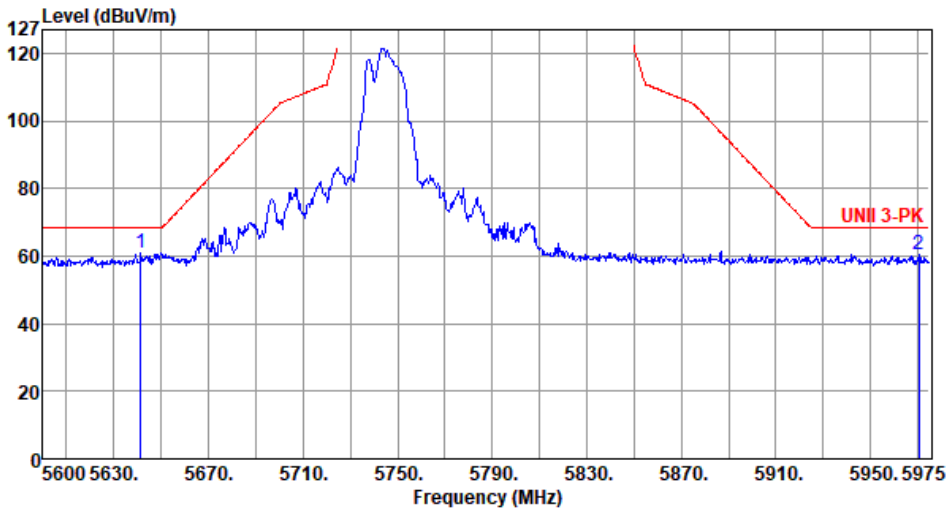Modulation	11a	Test Freq. (MHz)	5745																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5641.25</td><td>60.82</td><td>68.20</td><td>-7.38</td><td>58.93</td><td>1.89</td><td>Peak</td><td>314</td><td>199</td></tr><tr><td>2</td><td>5970.50</td><td>60.56</td><td>68.20</td><td>-7.64</td><td>57.66</td><td>2.90</td><td>Peak</td><td>314</td><td>199</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5641.25	60.82	68.20	-7.38	58.93	1.89	Peak	314	199	2	5970.50	60.56	68.20	-7.64	57.66	2.90	Peak	314	199
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5641.25	60.82	68.20	-7.38	58.93	1.89	Peak	314	199																								
2	5970.50	60.56	68.20	-7.64	57.66	2.90	Peak	314	199																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

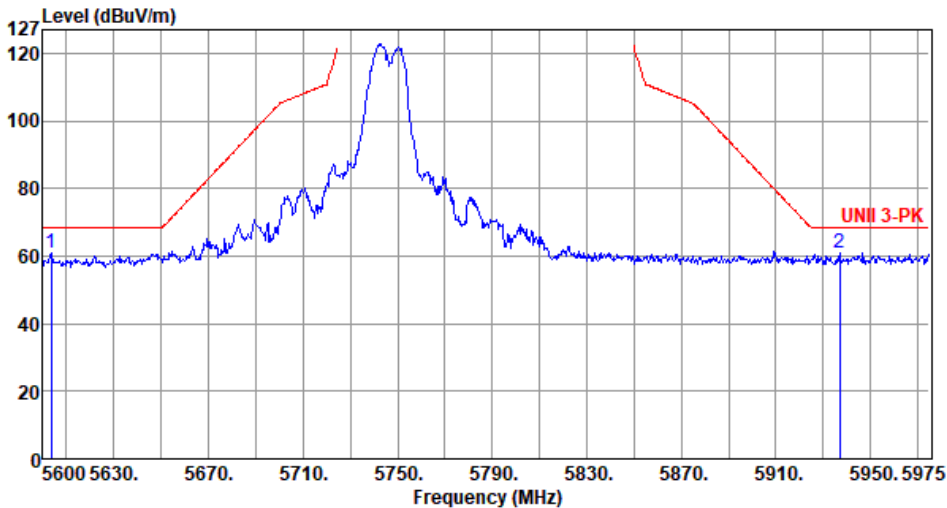Modulation	11a	Test Freq. (MHz)	5745																																																		
Polarization	Vertical-Peak																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5603.38</td><td>60.80</td><td>68.20</td><td>-7.40</td><td>58.95</td><td>1.85</td><td>Peak</td><td>299</td><td>257</td></tr><tr><td>2</td><td>5937.13</td><td>60.87</td><td>68.20</td><td>-7.33</td><td>58.04</td><td>2.83</td><td>Peak</td><td>299</td><td>257</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5603.38	60.80	68.20	-7.40	58.95	1.85	Peak	299	257	2	5937.13	60.87	68.20	-7.33	58.04	2.83	Peak	299	257
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5603.38	60.80	68.20	-7.40	58.95	1.85	Peak	299	257																																												
2	5937.13	60.87	68.20	-7.33	58.04	2.83	Peak	299	257																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement


Appendix D

Modulation	11a	Test Freq. (MHz)	5785																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBUV/m) 1 2 UNII 3-PK Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBUV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5618.38</td><td>60.00</td><td>68.20</td><td>-8.20</td><td>58.13</td><td>1.87</td><td>Peak</td><td>309</td><td>214</td></tr><tr><td>2</td><td>5972.38</td><td>61.37</td><td>68.20</td><td>-6.83</td><td>58.46</td><td>2.91</td><td>Peak</td><td>309</td><td>214</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBUV	dB/m		cm	deg	1	5618.38	60.00	68.20	-8.20	58.13	1.87	Peak	309	214	2	5972.38	61.37	68.20	-6.83	58.46	2.91	Peak	309	214
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBUV/m	dBUV/m	dB	dBUV	dB/m		cm	deg																																		
1	5618.38	60.00	68.20	-8.20	58.13	1.87	Peak	309	214																																		
2	5972.38	61.37	68.20	-6.83	58.46	2.91	Peak	309	214																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement


Appendix D

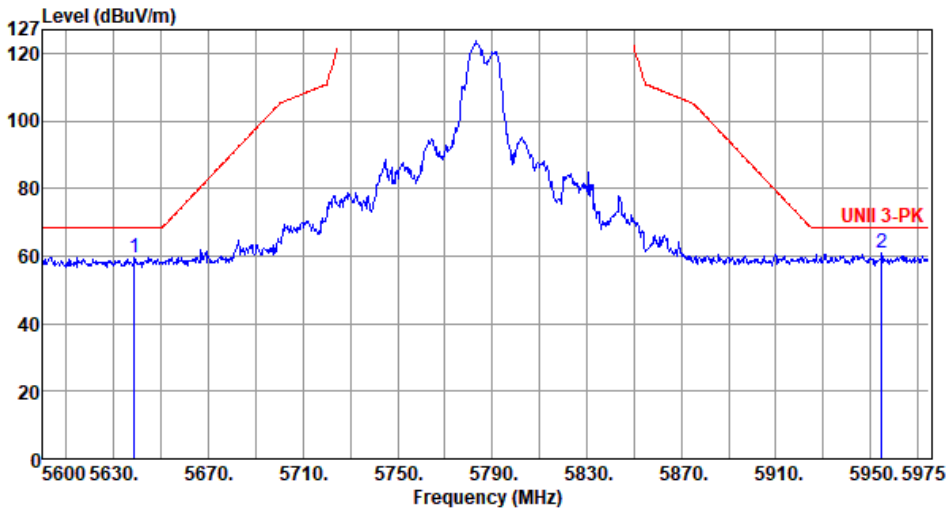Modulation	11a	Test Freq. (MHz)	5785																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5638.63</td><td>59.47</td><td>68.20</td><td>-8.73</td><td>57.59</td><td>1.88</td><td>Peak</td><td>330</td><td>253</td></tr><tr><td>2</td><td>5954.75</td><td>61.00</td><td>68.20</td><td>-7.20</td><td>58.14</td><td>2.86</td><td>Peak</td><td>330</td><td>253</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5638.63	59.47	68.20	-8.73	57.59	1.88	Peak	330	253	2	5954.75	61.00	68.20	-7.20	58.14	2.86	Peak	330	253
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5638.63	59.47	68.20	-8.73	57.59	1.88	Peak	330	253																								
2	5954.75	61.00	68.20	-7.20	58.14	2.86	Peak	330	253																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement


Appendix D

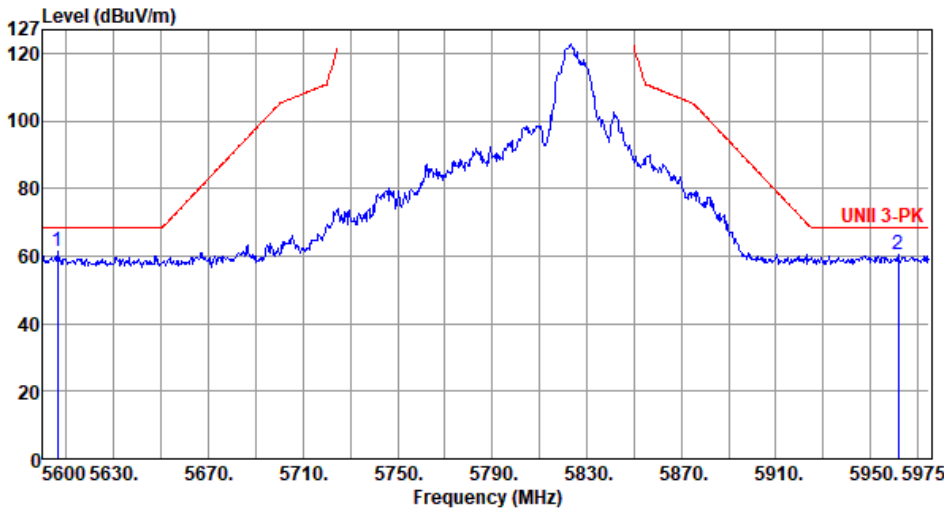Modulation	11a	Test Freq. (MHz)	5825																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5606.00</td><td>61.58</td><td>68.20</td><td>-6.62</td><td>59.72</td><td>1.86</td><td>Peak</td><td>313</td><td>207</td></tr><tr><td>2</td><td>5961.88</td><td>60.26</td><td>68.20</td><td>-7.94</td><td>57.38</td><td>2.88</td><td>Peak</td><td>313</td><td>207</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5606.00	61.58	68.20	-6.62	59.72	1.86	Peak	313	207	2	5961.88	60.26	68.20	-7.94	57.38	2.88	Peak	313	207
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5606.00	61.58	68.20	-6.62	59.72	1.86	Peak	313	207																								
2	5961.88	60.26	68.20	-7.94	57.38	2.88	Peak	313	207																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

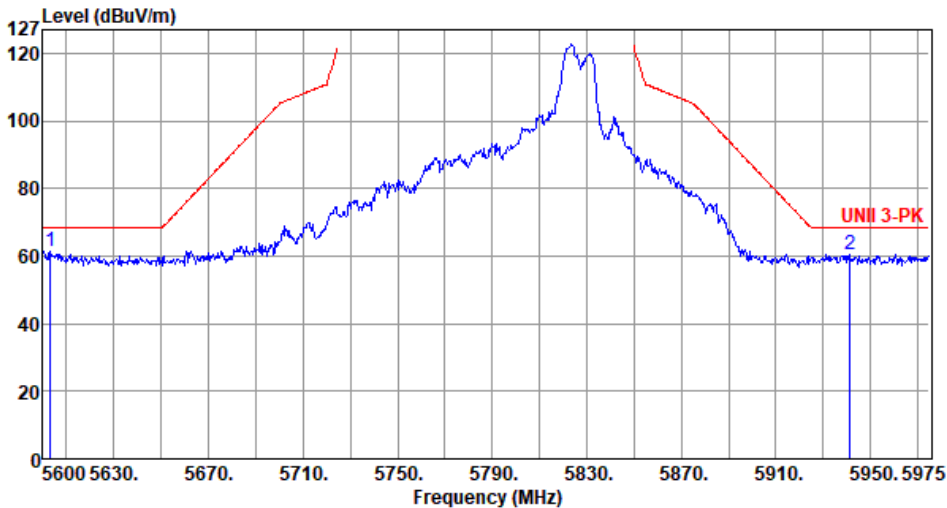Modulation	11a	Test Freq. (MHz)	5825																																																		
Polarization	Vertical-Peak																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5603.00</td><td>61.20</td><td>68.20</td><td>-7.00</td><td>59.35</td><td>1.85</td><td>Peak</td><td>324</td><td>250</td></tr><tr><td>2</td><td>5941.25</td><td>60.39</td><td>68.20</td><td>-7.81</td><td>57.55</td><td>2.84</td><td>Peak</td><td>324</td><td>250</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	5603.00	61.20	68.20	-7.00	59.35	1.85	Peak	324	250	2	5941.25	60.39	68.20	-7.81	57.55	2.84	Peak	324	250
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																												
		dBUV/m			dBUV			cm	deg																																												
1	5603.00	61.20	68.20	-7.00	59.35	1.85	Peak	324	250																																												
2	5941.25	60.39	68.20	-7.81	57.55	2.84	Peak	324	250																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement


Appendix D

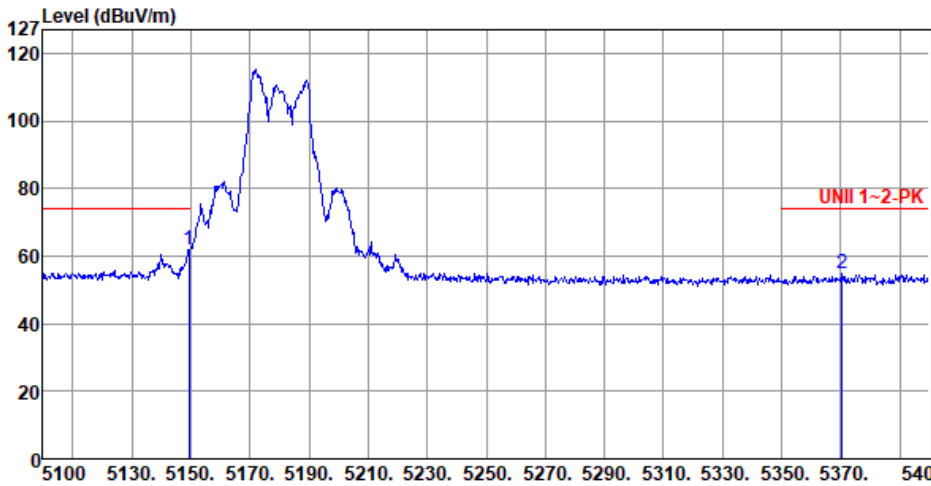Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5180																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.50</td><td>62.09</td><td>74.00</td><td>-11.91</td><td>60.09</td><td>2.00</td><td>Peak</td><td>232</td><td>249</td></tr><tr><td>2</td><td>5370.30</td><td>54.65</td><td>74.00</td><td>-19.35</td><td>53.18</td><td>1.47</td><td>Peak</td><td>232</td><td>249</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.50	62.09	74.00	-11.91	60.09	2.00	Peak	232	249	2	5370.30	54.65	74.00	-19.35	53.18	1.47	Peak	232	249
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.50	62.09	74.00	-11.91	60.09	2.00	Peak	232	249																								
2	5370.30	54.65	74.00	-19.35	53.18	1.47	Peak	232	249																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

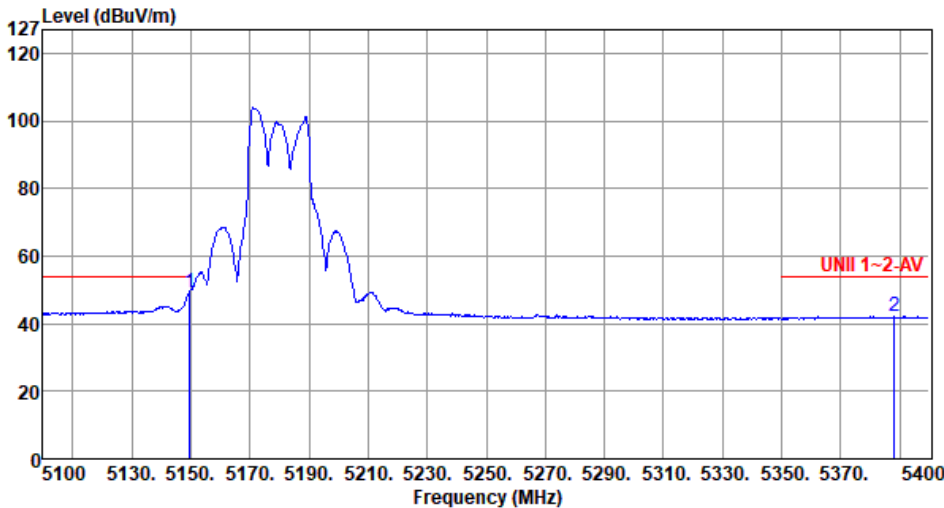Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5180																																																		
Polarization	Horizontal-Average																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.80</td><td>49.37</td><td>54.00</td><td>-4.63</td><td>47.37</td><td>2.00</td><td>Average</td><td>232</td><td>249</td></tr><tr><td>2</td><td>5388.00</td><td>42.05</td><td>54.00</td><td>-11.95</td><td>40.53</td><td>1.52</td><td>Average</td><td>232</td><td>249</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	5149.80	49.37	54.00	-4.63	47.37	2.00	Average	232	249	2	5388.00	42.05	54.00	-11.95	40.53	1.52	Average	232	249
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																												
		dBUV/m			dBUV			cm	deg																																												
1	5149.80	49.37	54.00	-4.63	47.37	2.00	Average	232	249																																												
2	5388.00	42.05	54.00	-11.95	40.53	1.52	Average	232	249																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement


Appendix D

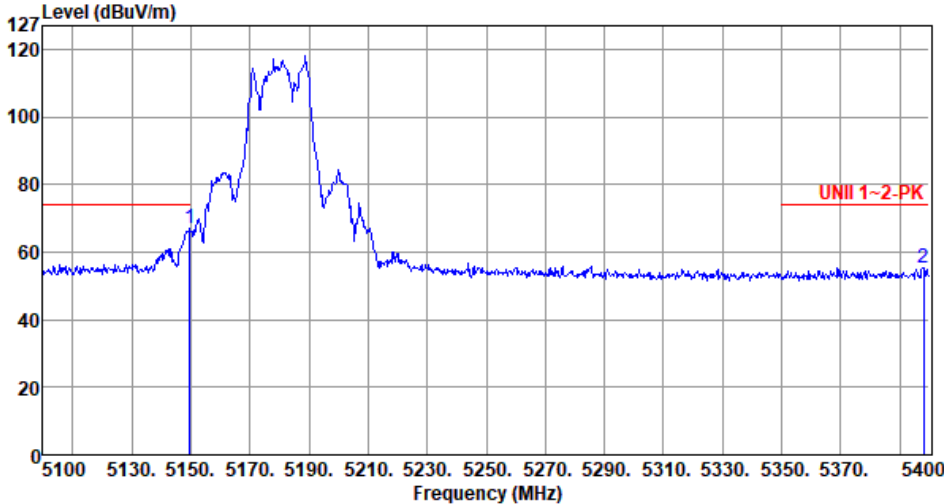Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5180																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.80</td><td>67.04</td><td>74.00</td><td>-6.96</td><td>65.04</td><td>2.00</td><td>Peak</td><td>233</td><td>249</td></tr><tr><td>2</td><td>5397.90</td><td>55.50</td><td>74.00</td><td>-18.50</td><td>53.95</td><td>1.55</td><td>Peak</td><td>233</td><td>249</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	67.04	74.00	-6.96	65.04	2.00	Peak	233	249	2	5397.90	55.50	74.00	-18.50	53.95	1.55	Peak	233	249
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	67.04	74.00	-6.96	65.04	2.00	Peak	233	249																								
2	5397.90	55.50	74.00	-18.50	53.95	1.55	Peak	233	249																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

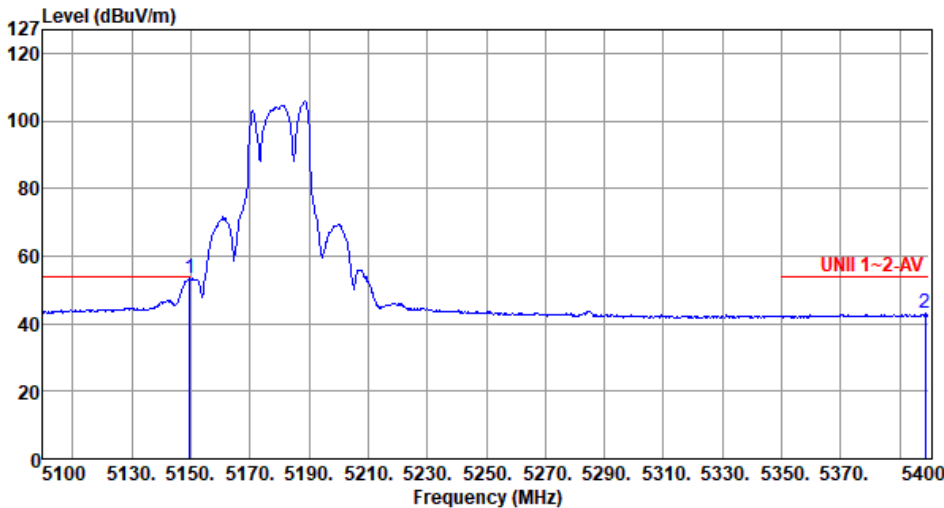Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5180																														
Polarization	Vertical-Average																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.80</td><td>53.58</td><td>54.00</td><td>-0.42</td><td>51.58</td><td>2.00</td><td>Average</td><td>233</td><td>249</td></tr><tr><td>2</td><td>5398.50</td><td>42.93</td><td>54.00</td><td>-11.07</td><td>41.38</td><td>1.55</td><td>Average</td><td>233</td><td>249</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	53.58	54.00	-0.42	51.58	2.00	Average	233	249	2	5398.50	42.93	54.00	-11.07	41.38	1.55	Average	233	249
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	53.58	54.00	-0.42	51.58	2.00	Average	233	249																								
2	5398.50	42.93	54.00	-11.07	41.38	1.55	Average	233	249																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

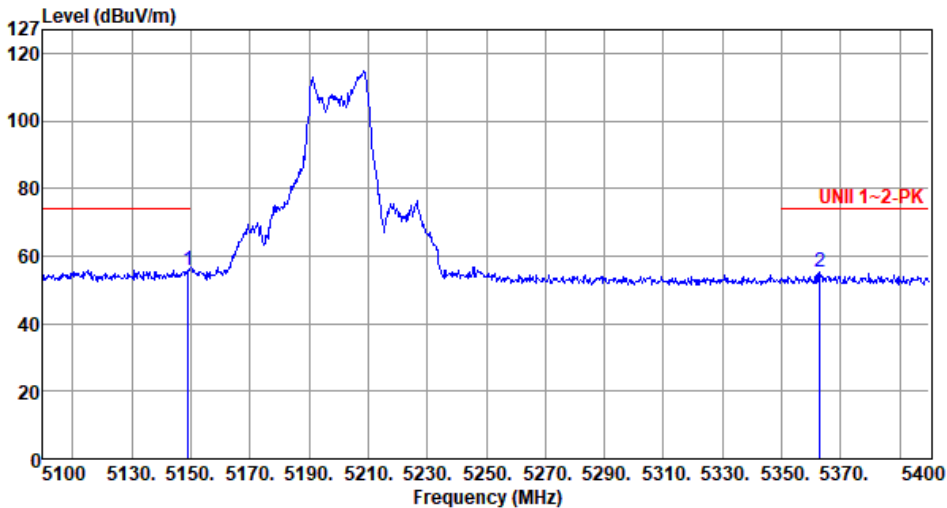Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5200																																																		
Polarization	Horizontal-Peak																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.20</td><td>55.76</td><td>74.00</td><td>-18.24</td><td>53.76</td><td>2.00</td><td>Peak</td><td>314</td><td>358</td></tr><tr><td>2</td><td>5362.80</td><td>55.08</td><td>74.00</td><td>-18.92</td><td>53.63</td><td>1.45</td><td>Peak</td><td>314</td><td>358</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5149.20	55.76	74.00	-18.24	53.76	2.00	Peak	314	358	2	5362.80	55.08	74.00	-18.92	53.63	1.45	Peak	314	358
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5149.20	55.76	74.00	-18.24	53.76	2.00	Peak	314	358																																												
2	5362.80	55.08	74.00	-18.92	53.63	1.45	Peak	314	358																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement


Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5200																														
Polarization	Horizontal-Average																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																	
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.30</td><td>43.93</td><td>54.00</td><td>-10.07</td><td>41.93</td><td>2.00</td><td>Average</td><td>314</td><td>358</td></tr><tr><td>2</td><td>5383.20</td><td>42.25</td><td>54.00</td><td>-11.75</td><td>40.75</td><td>1.50</td><td>Average</td><td>314</td><td>358</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.30	43.93	54.00	-10.07	41.93	2.00	Average	314	358	2	5383.20	42.25	54.00	-11.75	40.75	1.50	Average	314	358
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.30	43.93	54.00	-10.07	41.93	2.00	Average	314	358																								
2	5383.20	42.25	54.00	-11.75	40.75	1.50	Average	314	358																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement


Appendix D

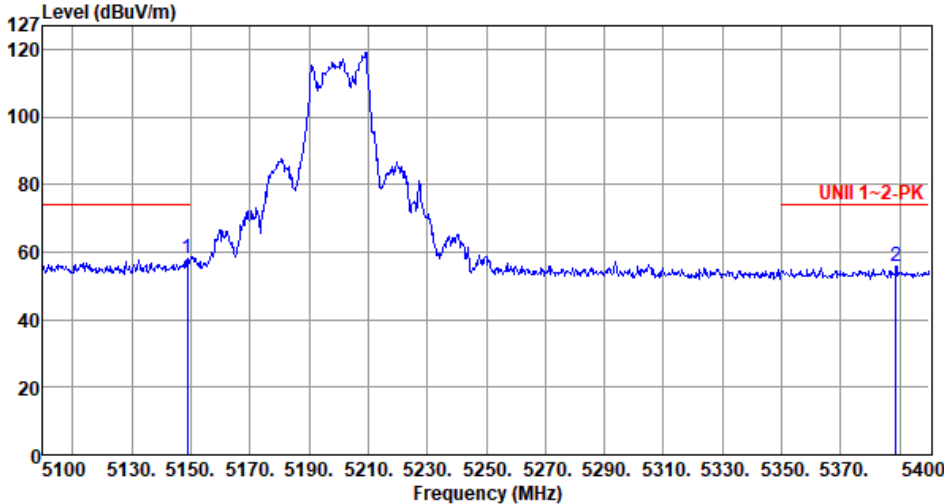Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5200																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.90</td><td>58.26</td><td>74.00</td><td>-15.74</td><td>56.26</td><td>2.00</td><td>Peak</td><td>257</td><td>250</td></tr><tr><td>2</td><td>5388.60</td><td>55.93</td><td>74.00</td><td>-18.07</td><td>54.41</td><td>1.52</td><td>Peak</td><td>257</td><td>250</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.90	58.26	74.00	-15.74	56.26	2.00	Peak	257	250	2	5388.60	55.93	74.00	-18.07	54.41	1.52	Peak	257	250
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.90	58.26	74.00	-15.74	56.26	2.00	Peak	257	250																								
2	5388.60	55.93	74.00	-18.07	54.41	1.52	Peak	257	250																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

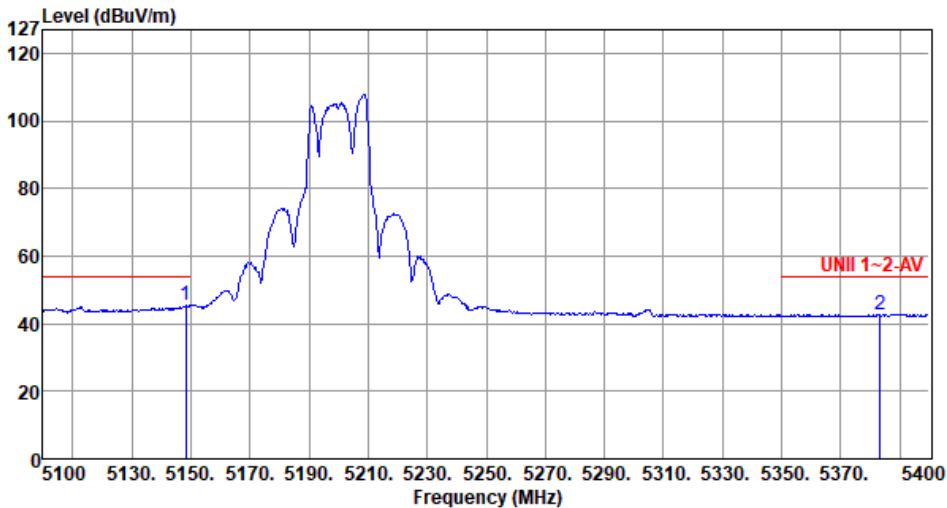Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5200
Polarization	Vertical-Average		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dB reading dB/m High Table dBuV/m dBuV cm deg 1 5148.30 45.40 54.00 -8.60 43.40 2.00 Average 257 250 2 5383.20 42.86 54.00 -11.14 41.36 1.50 Average 257 250			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			



Band Edge measurement


Appendix D

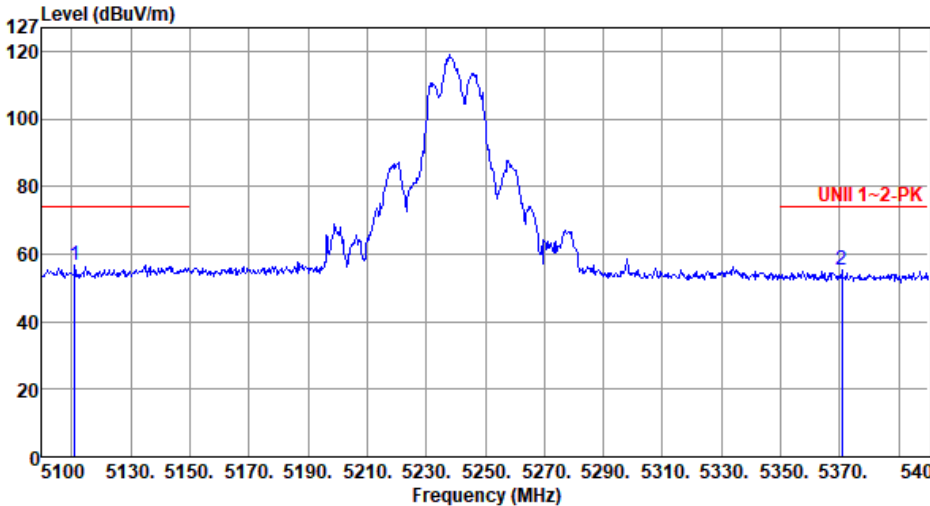Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5240																																																		
Polarization	Horizontal-Peak																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5111.10</td><td>56.66</td><td>74.00</td><td>-17.34</td><td>54.75</td><td>1.91</td><td>Peak</td><td>251</td><td>182</td></tr><tr><td>2</td><td>5370.60</td><td>55.14</td><td>74.00</td><td>-18.86</td><td>53.67</td><td>1.47</td><td>Peak</td><td>251</td><td>182</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5111.10	56.66	74.00	-17.34	54.75	1.91	Peak	251	182	2	5370.60	55.14	74.00	-18.86	53.67	1.47	Peak	251	182
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5111.10	56.66	74.00	-17.34	54.75	1.91	Peak	251	182																																												
2	5370.60	55.14	74.00	-18.86	53.67	1.47	Peak	251	182																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement


Appendix D

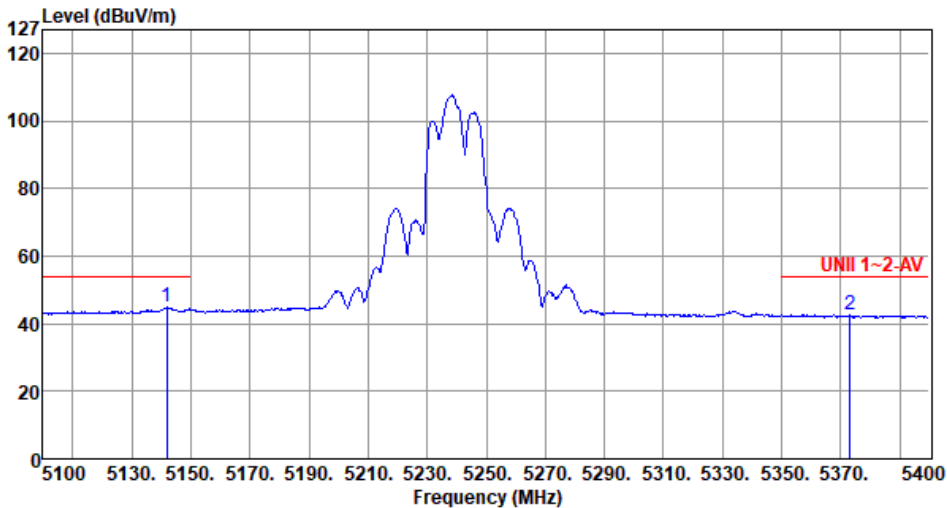Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5240																														
Polarization	Horizontal-Average																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5142.00</td><td>44.84</td><td>54.00</td><td>-9.16</td><td>42.86</td><td>1.98</td><td>Average</td><td>251</td><td>182</td></tr><tr><td>2</td><td>5373.00</td><td>42.50</td><td>54.00</td><td>-11.50</td><td>41.02</td><td>1.48</td><td>Average</td><td>251</td><td>182</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5142.00	44.84	54.00	-9.16	42.86	1.98	Average	251	182	2	5373.00	42.50	54.00	-11.50	41.02	1.48	Average	251	182
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5142.00	44.84	54.00	-9.16	42.86	1.98	Average	251	182																								
2	5373.00	42.50	54.00	-11.50	41.02	1.48	Average	251	182																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement


Appendix D

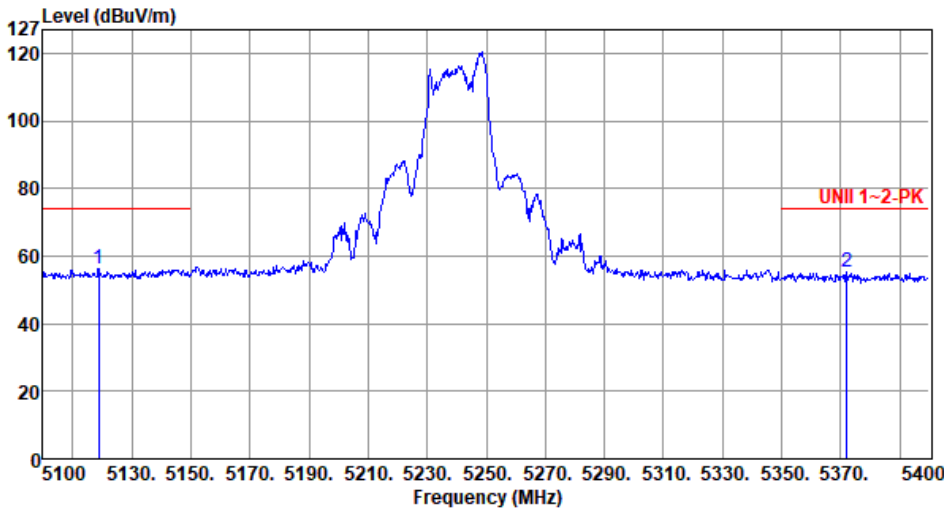Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5240																																																		
Polarization	Vertical-Peak																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5118.90</td><td>56.11</td><td>74.00</td><td>-17.89</td><td>54.17</td><td>1.94</td><td>Peak</td><td>176</td><td>253</td></tr><tr><td>2</td><td>5372.10</td><td>55.33</td><td>74.00</td><td>-18.67</td><td>53.86</td><td>1.47</td><td>Peak</td><td>176</td><td>253</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5118.90	56.11	74.00	-17.89	54.17	1.94	Peak	176	253	2	5372.10	55.33	74.00	-18.67	53.86	1.47	Peak	176	253
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5118.90	56.11	74.00	-17.89	54.17	1.94	Peak	176	253																																												
2	5372.10	55.33	74.00	-18.67	53.86	1.47	Peak	176	253																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

Appendix D

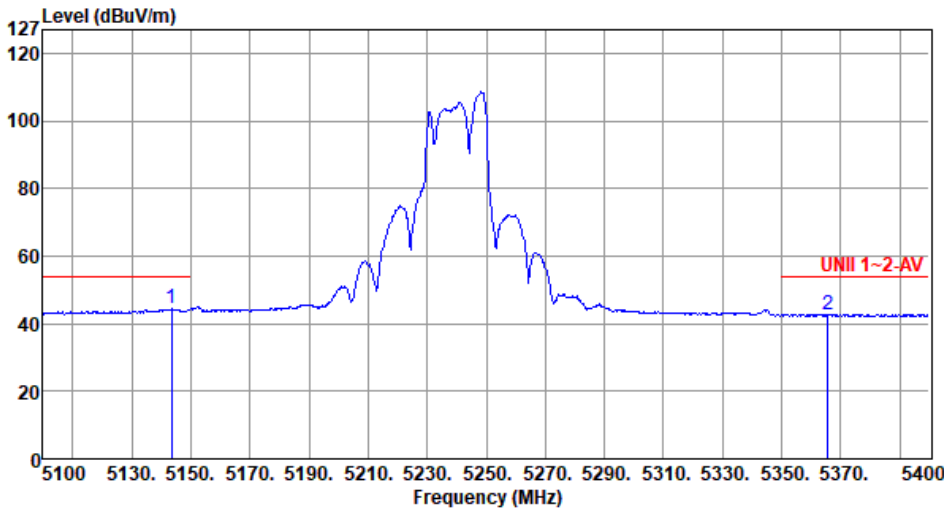Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5240																														
Polarization	Vertical-Average																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																	
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5143.50</td><td>44.32</td><td>54.00</td><td>-9.68</td><td>42.33</td><td>1.99</td><td>Average</td><td>176</td><td>253</td></tr><tr><td>2</td><td>5365.50</td><td>42.73</td><td>54.00</td><td>-11.27</td><td>41.27</td><td>1.46</td><td>Average</td><td>176</td><td>253</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5143.50	44.32	54.00	-9.68	42.33	1.99	Average	176	253	2	5365.50	42.73	54.00	-11.27	41.27	1.46	Average	176	253
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5143.50	44.32	54.00	-9.68	42.33	1.99	Average	176	253																								
2	5365.50	42.73	54.00	-11.27	41.27	1.46	Average	176	253																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement


Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5260																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																	
Level (dBuV/m) UNII 1~2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5136.00</td><td>57.16</td><td>74.00</td><td>-16.84</td><td>55.20</td><td>1.96</td><td>Peak</td><td>231</td><td>183</td></tr><tr><td>2</td><td>5354.70</td><td>56.13</td><td>74.00</td><td>-17.87</td><td>54.71</td><td>1.42</td><td>Peak</td><td>231</td><td>183</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5136.00	57.16	74.00	-16.84	55.20	1.96	Peak	231	183	2	5354.70	56.13	74.00	-17.87	54.71	1.42	Peak	231	183
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5136.00	57.16	74.00	-16.84	55.20	1.96	Peak	231	183																								
2	5354.70	56.13	74.00	-17.87	54.71	1.42	Peak	231	183																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

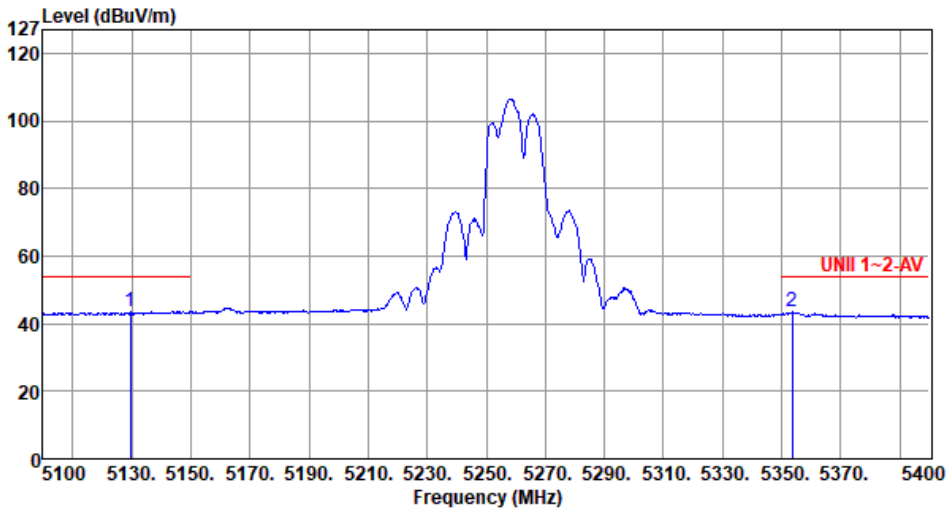Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5260																														
Polarization	Horizontal-Average																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5129.70</td><td>43.52</td><td>54.00</td><td>-10.48</td><td>41.57</td><td>1.95</td><td>Average</td><td>231</td><td>183</td></tr><tr><td>2</td><td>5353.50</td><td>43.43</td><td>54.00</td><td>-10.57</td><td>42.01</td><td>1.42</td><td>Average</td><td>231</td><td>183</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5129.70	43.52	54.00	-10.48	41.57	1.95	Average	231	183	2	5353.50	43.43	54.00	-10.57	42.01	1.42	Average	231	183
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5129.70	43.52	54.00	-10.48	41.57	1.95	Average	231	183																								
2	5353.50	43.43	54.00	-10.57	42.01	1.42	Average	231	183																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement


Appendix D

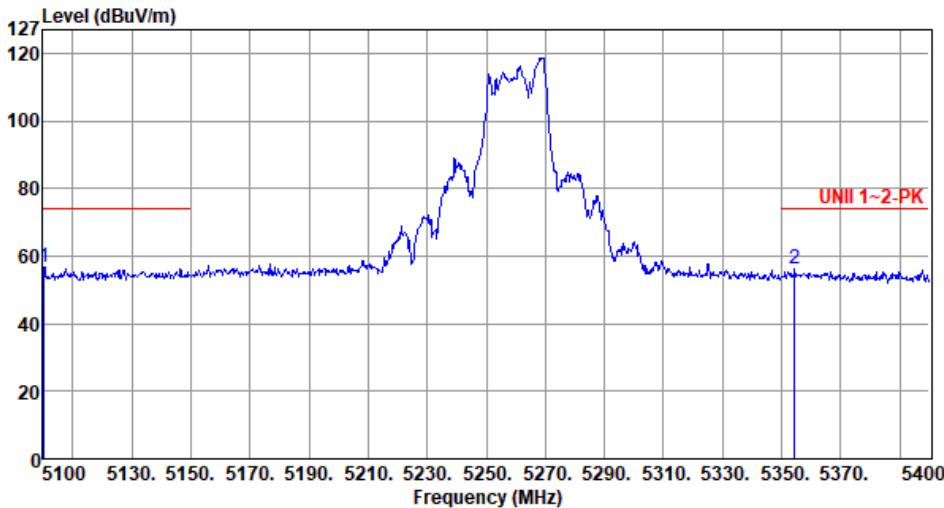Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5260																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5100.30</td><td>56.62</td><td>74.00</td><td>-17.38</td><td>54.73</td><td>1.89</td><td>Peak</td><td>180</td><td>253</td></tr><tr><td>2</td><td>5354.40</td><td>56.11</td><td>74.00</td><td>-17.89</td><td>54.69</td><td>1.42</td><td>Peak</td><td>180</td><td>253</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5100.30	56.62	74.00	-17.38	54.73	1.89	Peak	180	253	2	5354.40	56.11	74.00	-17.89	54.69	1.42	Peak	180	253
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5100.30	56.62	74.00	-17.38	54.73	1.89	Peak	180	253																								
2	5354.40	56.11	74.00	-17.89	54.69	1.42	Peak	180	253																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

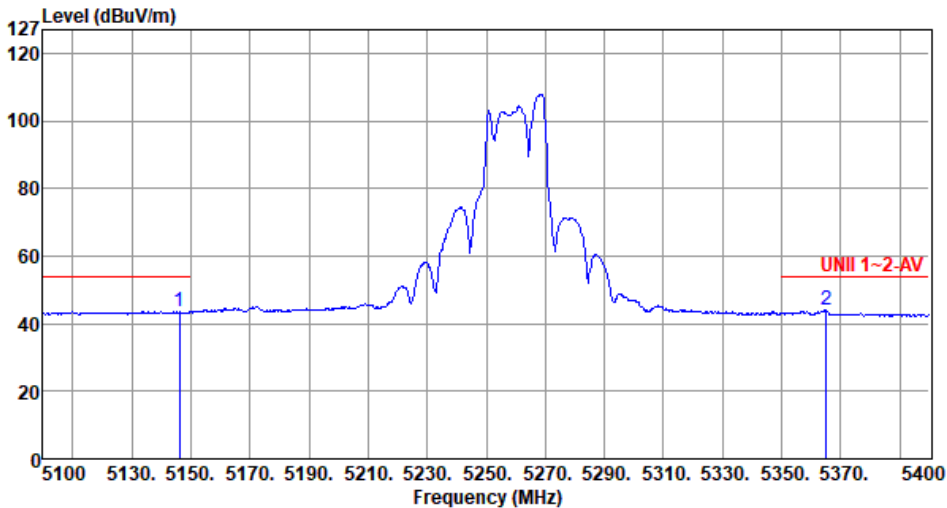Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5260																														
Polarization	Vertical-Average																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																	
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5146.20</td><td>43.66</td><td>54.00</td><td>-10.34</td><td>41.67</td><td>1.99</td><td>Average</td><td>180</td><td>253</td></tr><tr><td>2</td><td>5365.20</td><td>43.92</td><td>54.00</td><td>-10.08</td><td>42.46</td><td>1.46</td><td>Average</td><td>180</td><td>253</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5146.20	43.66	54.00	-10.34	41.67	1.99	Average	180	253	2	5365.20	43.92	54.00	-10.08	42.46	1.46	Average	180	253
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5146.20	43.66	54.00	-10.34	41.67	1.99	Average	180	253																								
2	5365.20	43.92	54.00	-10.08	42.46	1.46	Average	180	253																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement


Appendix D

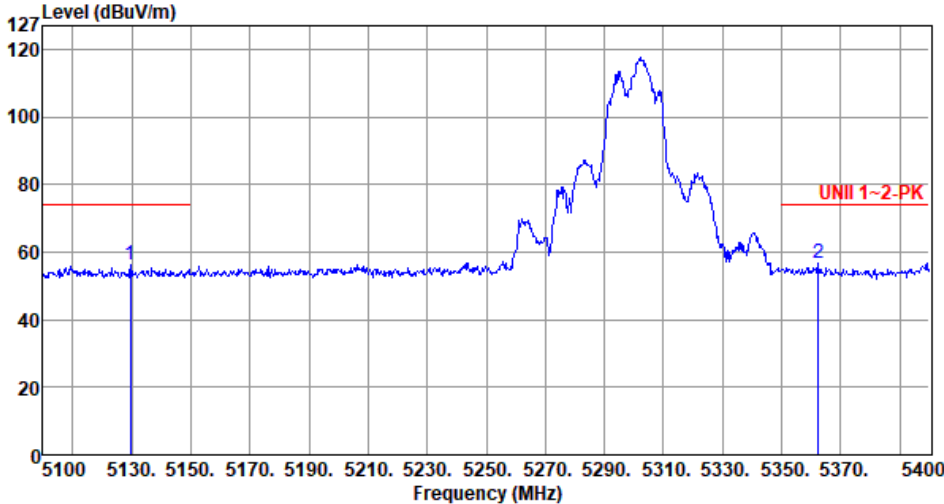Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5300																																																		
Polarization	Horizontal-Peak																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5129.70</td><td>56.45</td><td>74.00</td><td>-17.55</td><td>54.50</td><td>1.95</td><td>Peak</td><td>244</td><td>225</td></tr><tr><td>2</td><td>5362.50</td><td>56.71</td><td>74.00</td><td>-17.29</td><td>55.27</td><td>1.44</td><td>Peak</td><td>244</td><td>225</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5129.70	56.45	74.00	-17.55	54.50	1.95	Peak	244	225	2	5362.50	56.71	74.00	-17.29	55.27	1.44	Peak	244	225
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5129.70	56.45	74.00	-17.55	54.50	1.95	Peak	244	225																																												
2	5362.50	56.71	74.00	-17.29	55.27	1.44	Peak	244	225																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

Appendix D

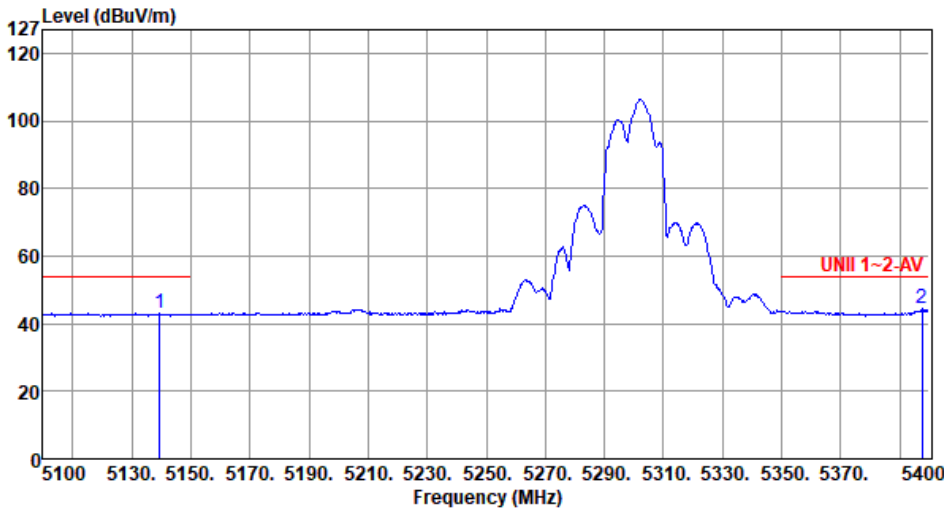Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5300																														
Polarization	Horizontal-Average																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5139.60</td><td>42.94</td><td>54.00</td><td>-11.06</td><td>40.96</td><td>1.98</td><td>Average</td><td>244</td><td>225</td></tr><tr><td>2</td><td>5397.60</td><td>44.31</td><td>54.00</td><td>-9.69</td><td>42.76</td><td>1.55</td><td>Average</td><td>244</td><td>225</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5139.60	42.94	54.00	-11.06	40.96	1.98	Average	244	225	2	5397.60	44.31	54.00	-9.69	42.76	1.55	Average	244	225
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5139.60	42.94	54.00	-11.06	40.96	1.98	Average	244	225																								
2	5397.60	44.31	54.00	-9.69	42.76	1.55	Average	244	225																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement


Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5300																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5136.90</td><td>56.25</td><td>74.00</td><td>-17.75</td><td>54.29</td><td>1.96</td><td>Peak</td><td>241</td><td>249</td></tr><tr><td>2</td><td>5351.10</td><td>58.27</td><td>74.00</td><td>-15.73</td><td>56.86</td><td>1.41</td><td>Peak</td><td>241</td><td>249</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5136.90	56.25	74.00	-17.75	54.29	1.96	Peak	241	249	2	5351.10	58.27	74.00	-15.73	56.86	1.41	Peak	241	249
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5136.90	56.25	74.00	-17.75	54.29	1.96	Peak	241	249																								
2	5351.10	58.27	74.00	-15.73	56.86	1.41	Peak	241	249																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement


Appendix D

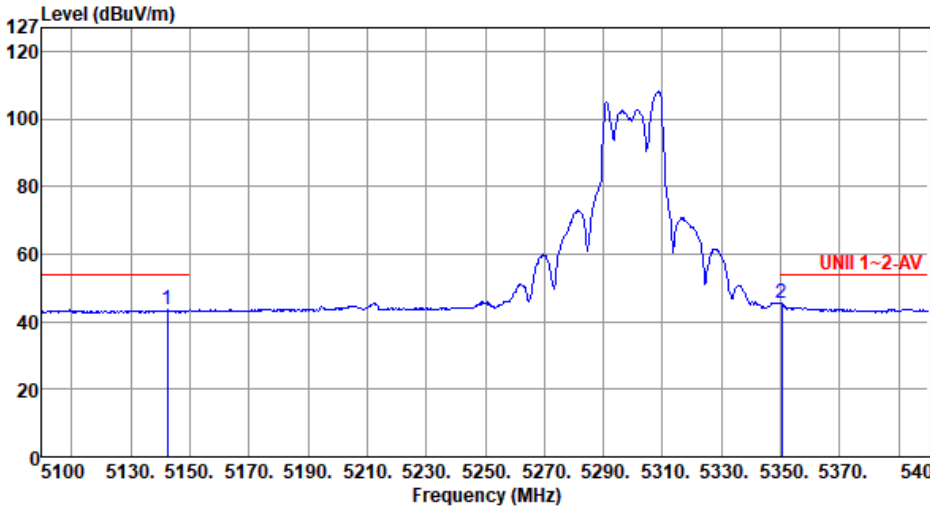Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5300																																																		
Polarization	Vertical-Average																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5142.30</td><td>43.42</td><td>54.00</td><td>-10.58</td><td>41.44</td><td>1.98</td><td>Average</td><td>241</td><td>249</td></tr><tr><td>2</td><td>5350.20</td><td>45.25</td><td>54.00</td><td>-8.75</td><td>43.84</td><td>1.41</td><td>Average</td><td>241</td><td>249</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5142.30	43.42	54.00	-10.58	41.44	1.98	Average	241	249	2	5350.20	45.25	54.00	-8.75	43.84	1.41	Average	241	249
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5142.30	43.42	54.00	-10.58	41.44	1.98	Average	241	249																																												
2	5350.20	45.25	54.00	-8.75	43.84	1.41	Average	241	249																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

Appendix D

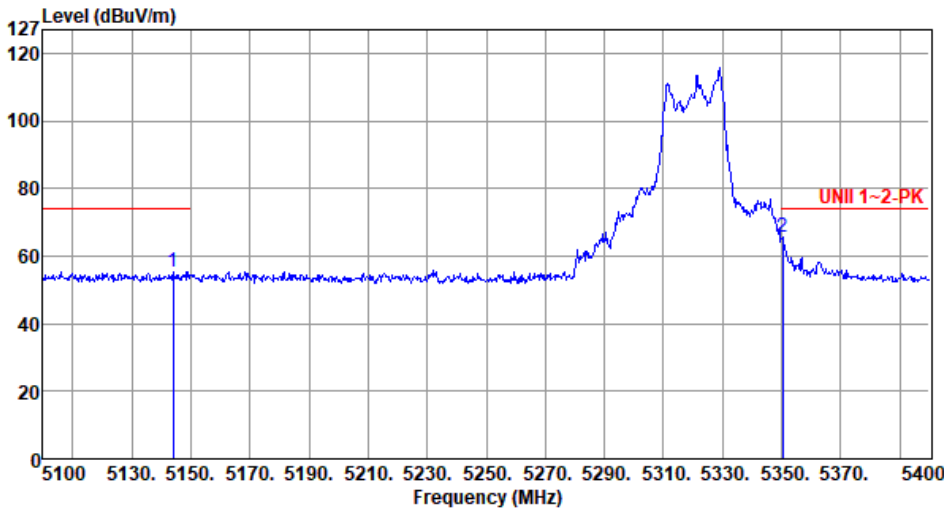Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5320																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5144.10</td><td>55.33</td><td>74.00</td><td>-18.67</td><td>53.34</td><td>1.99</td><td>Peak</td><td>315</td><td>150</td></tr><tr><td>2</td><td>5350.20</td><td>65.66</td><td>74.00</td><td>-8.34</td><td>64.25</td><td>1.41</td><td>Peak</td><td>315</td><td>150</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5144.10	55.33	74.00	-18.67	53.34	1.99	Peak	315	150	2	5350.20	65.66	74.00	-8.34	64.25	1.41	Peak	315	150
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5144.10	55.33	74.00	-18.67	53.34	1.99	Peak	315	150																								
2	5350.20	65.66	74.00	-8.34	64.25	1.41	Peak	315	150																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5320																																																		
Polarization	Horizontal-Average																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5107.20</td><td>42.92</td><td>54.00</td><td>-11.08</td><td>41.02</td><td>1.90</td><td>Average</td><td>315</td><td>150</td></tr><tr><td>2</td><td>5350.20</td><td>51.22</td><td>54.00</td><td>-2.78</td><td>49.81</td><td>1.41</td><td>Average</td><td>315</td><td>150</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table						dBuV			cm	deg	1	5107.20	42.92	54.00	-11.08	41.02	1.90	Average	315	150	2	5350.20	51.22	54.00	-2.78	49.81	1.41	Average	315	150
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
					dBuV			cm	deg																																												
1	5107.20	42.92	54.00	-11.08	41.02	1.90	Average	315	150																																												
2	5350.20	51.22	54.00	-2.78	49.81	1.41	Average	315	150																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

Appendix D

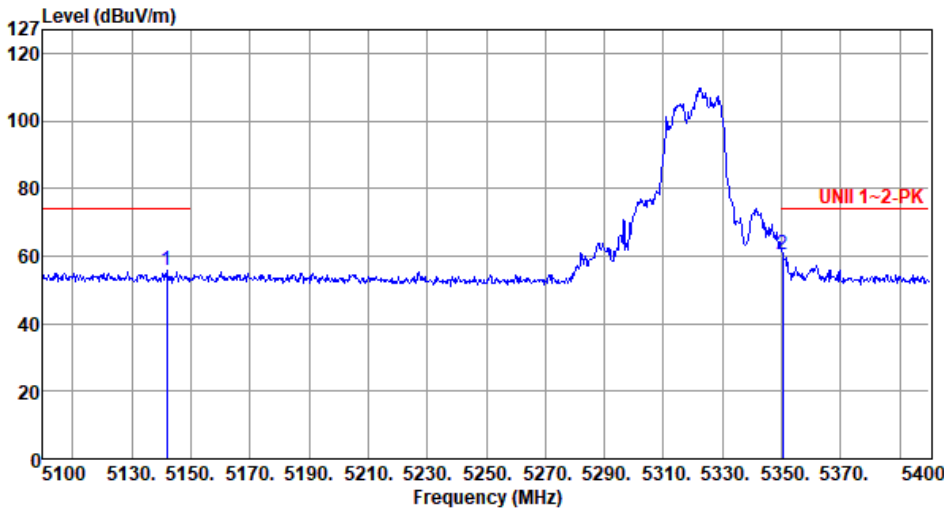Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5320																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5142.00</td><td>55.82</td><td>74.00</td><td>-18.18</td><td>53.84</td><td>1.98</td><td>Peak</td><td>240</td><td>311</td></tr><tr><td>2</td><td>5350.20</td><td>60.56</td><td>74.00</td><td>-13.44</td><td>59.15</td><td>1.41</td><td>Peak</td><td>240</td><td>311</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5142.00	55.82	74.00	-18.18	53.84	1.98	Peak	240	311	2	5350.20	60.56	74.00	-13.44	59.15	1.41	Peak	240	311
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5142.00	55.82	74.00	-18.18	53.84	1.98	Peak	240	311																								
2	5350.20	60.56	74.00	-13.44	59.15	1.41	Peak	240	311																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5320																																								
Polarization	Vertical-Average																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
Level (dBUV/m) 1 UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5105.40</td><td>42.82</td><td>54.00</td><td>-11.18</td><td>40.92</td><td>1.90</td><td>Average</td><td>240</td><td>311</td></tr><tr><td>2</td><td>5350.20</td><td>48.36</td><td>54.00</td><td>-5.64</td><td>46.95</td><td>1.41</td><td>Average</td><td>240</td><td>311</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg	1	5105.40	42.82	54.00	-11.18	40.92	1.90	Average	240	311	2	5350.20	48.36	54.00	-5.64	46.95	1.41	Average	240	311
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg																																		
1	5105.40	42.82	54.00	-11.18	40.92	1.90	Average	240	311																																		
2	5350.20	48.36	54.00	-5.64	46.95	1.41	Average	240	311																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement


Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5500																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5459.35</td><td>55.96</td><td>74.00</td><td>-18.04</td><td>54.27</td><td>1.69</td><td>Peak</td><td>281</td><td>139</td></tr><tr><td>2</td><td>5469.64</td><td>64.82</td><td>68.20</td><td>-3.38</td><td>63.10</td><td>1.72</td><td>Peak</td><td>281</td><td>139</td></tr><tr><td>3</td><td>5729.50</td><td>56.24</td><td>68.20</td><td>-11.96</td><td>54.06</td><td>2.18</td><td>Peak</td><td>281</td><td>139</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.35	55.96	74.00	-18.04	54.27	1.69	Peak	281	139	2	5469.64	64.82	68.20	-3.38	63.10	1.72	Peak	281	139	3	5729.50	56.24	68.20	-11.96	54.06	2.18	Peak	281	139
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5459.35	55.96	74.00	-18.04	54.27	1.69	Peak	281	139																																		
2	5469.64	64.82	68.20	-3.38	63.10	1.72	Peak	281	139																																		
3	5729.50	56.24	68.20	-11.96	54.06	2.18	Peak	281	139																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

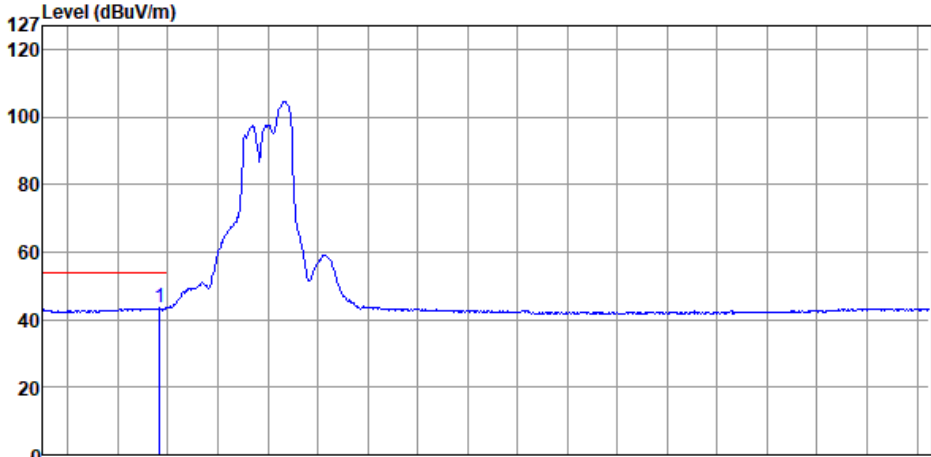Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5500																				
Polarization	Horizontal-Average																						
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5456.86</td><td>43.55</td><td>54.00</td><td>-10.45</td><td>41.87</td><td>1.68</td><td>Average</td><td>281</td><td>139</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5456.86	43.55	54.00	-10.45	41.87	1.68	Average	281	139
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5456.86	43.55	54.00	-10.45	41.87	1.68	Average	281	139														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5500																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
Level (dBuV/m) UNII 1~2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5457.57</td><td>56.12</td><td>74.00</td><td>-17.88</td><td>54.43</td><td>1.69</td><td>Peak</td><td>315</td><td>288</td></tr><tr><td>2</td><td>5469.64</td><td>62.88</td><td>68.20</td><td>-5.32</td><td>61.16</td><td>1.72</td><td>Peak</td><td>315</td><td>288</td></tr><tr><td>3</td><td>5752.58</td><td>55.85</td><td>68.20</td><td>-12.35</td><td>53.57</td><td>2.28</td><td>Peak</td><td>315</td><td>288</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5457.57	56.12	74.00	-17.88	54.43	1.69	Peak	315	288	2	5469.64	62.88	68.20	-5.32	61.16	1.72	Peak	315	288	3	5752.58	55.85	68.20	-12.35	53.57	2.28	Peak	315	288
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5457.57	56.12	74.00	-17.88	54.43	1.69	Peak	315	288																																		
2	5469.64	62.88	68.20	-5.32	61.16	1.72	Peak	315	288																																		
3	5752.58	55.85	68.20	-12.35	53.57	2.28	Peak	315	288																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement


Appendix D

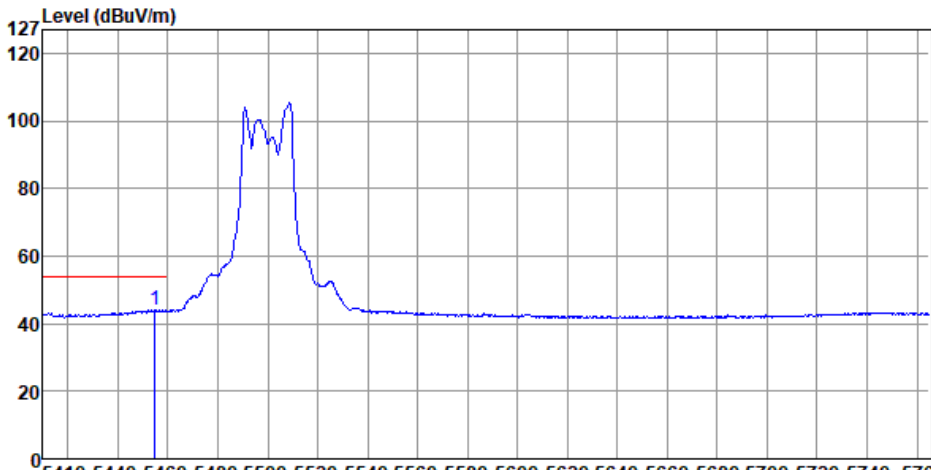Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5500																				
Polarization	Vertical-Average																						
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																							
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5454.73</td><td>44.04</td><td>54.00</td><td>-9.96</td><td>42.36</td><td>1.68</td><td>Average</td><td>315</td><td>288</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5454.73	44.04	54.00	-9.96	42.36	1.68	Average	315	288
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5454.73	44.04	54.00	-9.96	42.36	1.68	Average	315	288														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

Appendix D

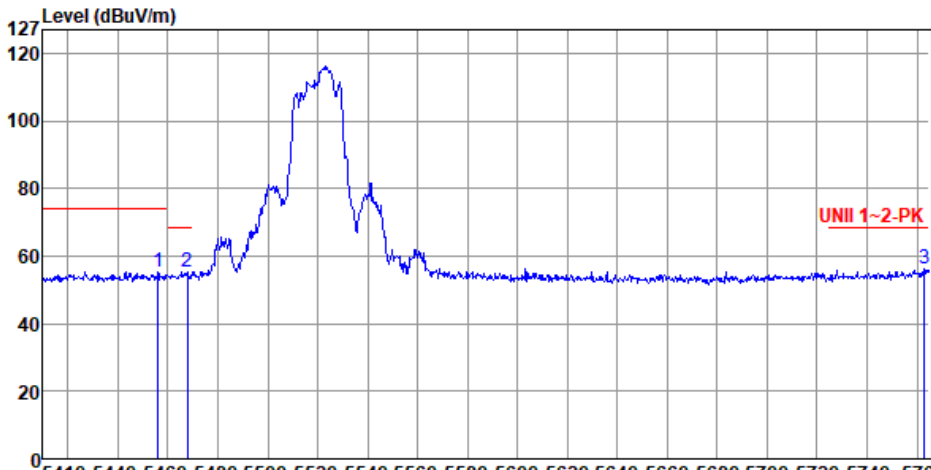Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5520																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5456.15</td><td>55.45</td><td>74.00</td><td>-18.55</td><td>53.77</td><td>1.68</td><td>Peak</td><td>236</td><td>217</td></tr><tr><td>2</td><td>5467.87</td><td>55.47</td><td>68.20</td><td>-12.73</td><td>53.76</td><td>1.71</td><td>Peak</td><td>236</td><td>217</td></tr><tr><td>3</td><td>5762.87</td><td>56.33</td><td>68.20</td><td>-11.87</td><td>54.00</td><td>2.33</td><td>Peak</td><td>236</td><td>217</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5456.15	55.45	74.00	-18.55	53.77	1.68	Peak	236	217	2	5467.87	55.47	68.20	-12.73	53.76	1.71	Peak	236	217	3	5762.87	56.33	68.20	-11.87	54.00	2.33	Peak	236	217
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5456.15	55.45	74.00	-18.55	53.77	1.68	Peak	236	217																																		
2	5467.87	55.47	68.20	-12.73	53.76	1.71	Peak	236	217																																		
3	5762.87	56.33	68.20	-11.87	54.00	2.33	Peak	236	217																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement


Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5520
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m)			



Band Edge measurement


Appendix D

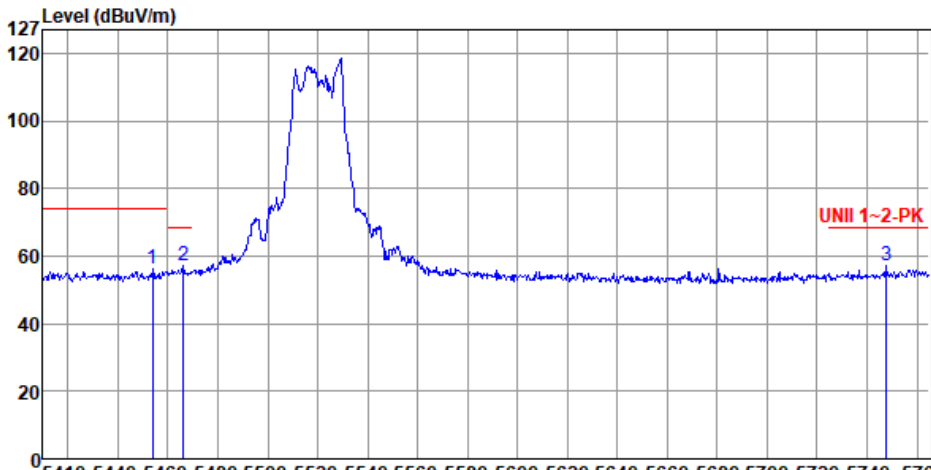Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5520																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5454.02</td><td>56.07</td><td>74.00</td><td>-17.93</td><td>54.39</td><td>1.68</td><td>Peak</td><td>243</td><td>246</td></tr><tr><td>2</td><td>5466.09</td><td>57.20</td><td>68.20</td><td>-11.00</td><td>55.50</td><td>1.70</td><td>Peak</td><td>243</td><td>246</td></tr><tr><td>3</td><td>5747.61</td><td>57.30</td><td>68.20</td><td>-10.90</td><td>55.03</td><td>2.27</td><td>Peak</td><td>243</td><td>246</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5454.02	56.07	74.00	-17.93	54.39	1.68	Peak	243	246	2	5466.09	57.20	68.20	-11.00	55.50	1.70	Peak	243	246	3	5747.61	57.30	68.20	-10.90	55.03	2.27	Peak	243	246
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5454.02	56.07	74.00	-17.93	54.39	1.68	Peak	243	246																																		
2	5466.09	57.20	68.20	-11.00	55.50	1.70	Peak	243	246																																		
3	5747.61	57.30	68.20	-10.90	55.03	2.27	Peak	243	246																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement


Appendix D

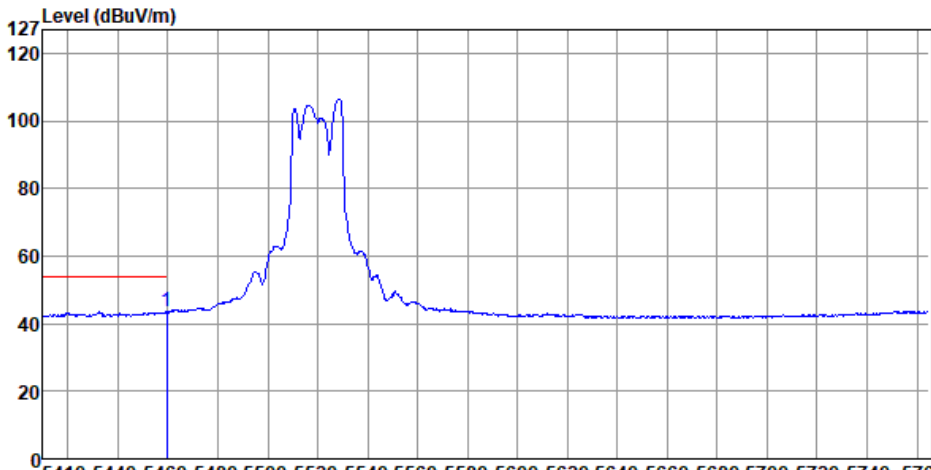Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5520																				
Polarization	Vertical-Average																						
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5459.70</td><td>43.51</td><td>54.00</td><td>-10.49</td><td>41.82</td><td>1.69</td><td>Average</td><td>243</td><td>246</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.70	43.51	54.00	-10.49	41.82	1.69	Average	243	246
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5459.70	43.51	54.00	-10.49	41.82	1.69	Average	243	246														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

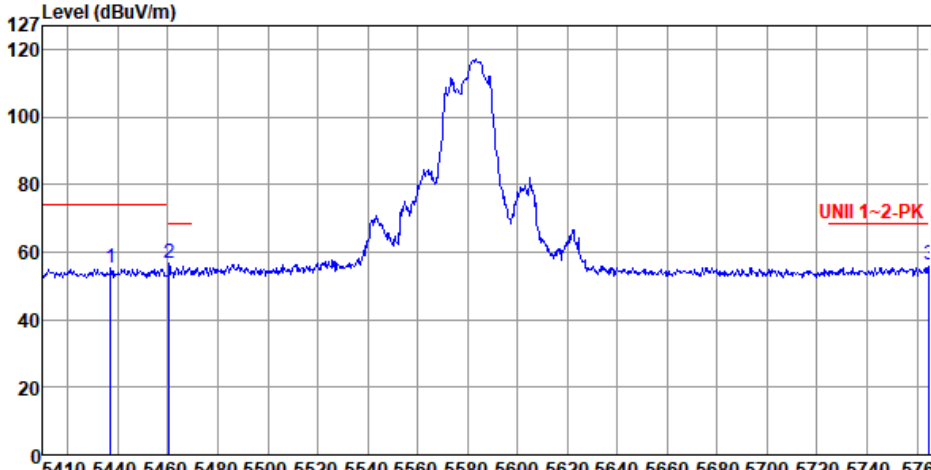Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5580																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5436.98</td><td>55.45</td><td>74.00</td><td>-18.55</td><td>53.82</td><td>1.63</td><td>Peak</td><td>320</td><td>206</td></tr><tr><td>2</td><td>5460.41</td><td>56.51</td><td>68.20</td><td>-11.69</td><td>54.82</td><td>1.69</td><td>Peak</td><td>320</td><td>206</td></tr><tr><td>3</td><td>5765.00</td><td>56.13</td><td>68.20</td><td>-12.07</td><td>53.79</td><td>2.34</td><td>Peak</td><td>320</td><td>206</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5436.98	55.45	74.00	-18.55	53.82	1.63	Peak	320	206	2	5460.41	56.51	68.20	-11.69	54.82	1.69	Peak	320	206	3	5765.00	56.13	68.20	-12.07	53.79	2.34	Peak	320	206
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5436.98	55.45	74.00	-18.55	53.82	1.63	Peak	320	206																																		
2	5460.41	56.51	68.20	-11.69	54.82	1.69	Peak	320	206																																		
3	5765.00	56.13	68.20	-12.07	53.79	2.34	Peak	320	206																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement


Appendix D

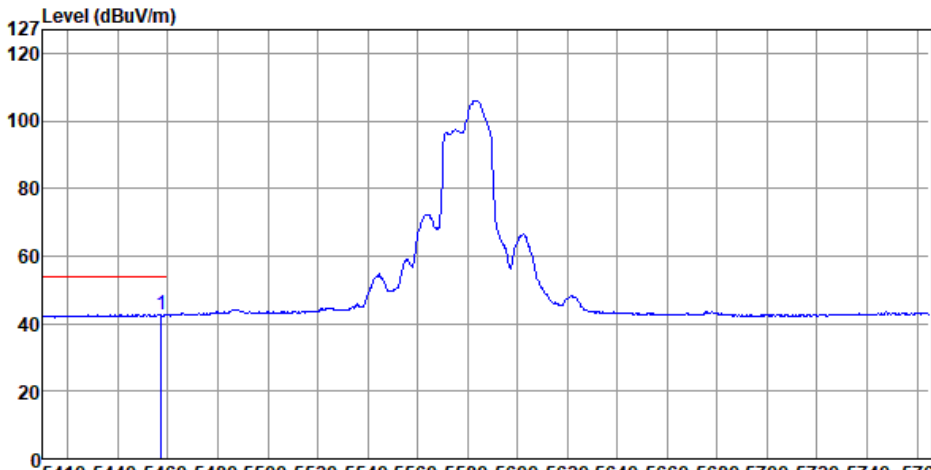Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5580																				
Polarization	Horizontal-Average																						
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																							
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5457.22</td><td>42.72</td><td>54.00</td><td>-11.28</td><td>41.04</td><td>1.68</td><td>Average</td><td>320</td><td>206</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5457.22	42.72	54.00	-11.28	41.04	1.68	Average	320	206
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5457.22	42.72	54.00	-11.28	41.04	1.68	Average	320	206														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement


Appendix D

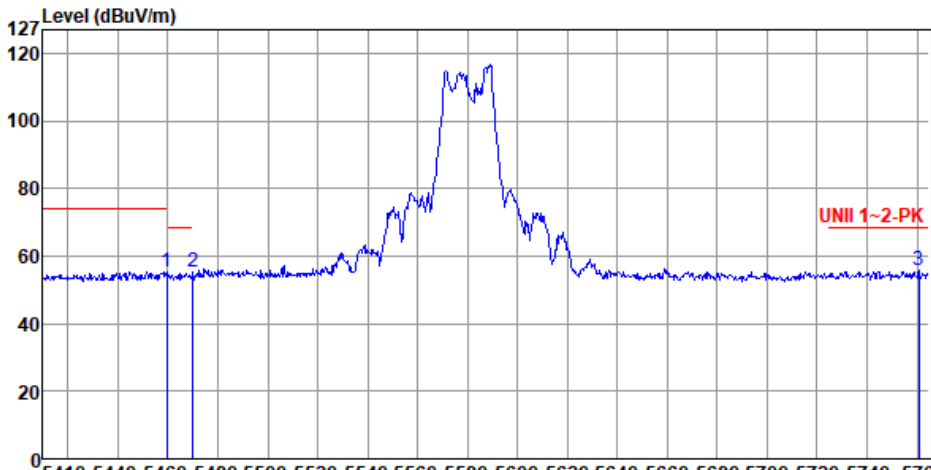Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5580																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5459.70</td><td>55.49</td><td>74.00</td><td>-18.51</td><td>53.80</td><td>1.69</td><td>Peak</td><td>238</td><td>243</td></tr><tr><td>2</td><td>5470.00</td><td>55.08</td><td>68.20</td><td>-13.12</td><td>53.36</td><td>1.72</td><td>Peak</td><td>238</td><td>243</td></tr><tr><td>3</td><td>5760.74</td><td>55.62</td><td>68.20</td><td>-12.58</td><td>53.30</td><td>2.32</td><td>Peak</td><td>238</td><td>243</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.70	55.49	74.00	-18.51	53.80	1.69	Peak	238	243	2	5470.00	55.08	68.20	-13.12	53.36	1.72	Peak	238	243	3	5760.74	55.62	68.20	-12.58	53.30	2.32	Peak	238	243
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5459.70	55.49	74.00	-18.51	53.80	1.69	Peak	238	243																																		
2	5470.00	55.08	68.20	-13.12	53.36	1.72	Peak	238	243																																		
3	5760.74	55.62	68.20	-12.58	53.30	2.32	Peak	238	243																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement


Appendix D

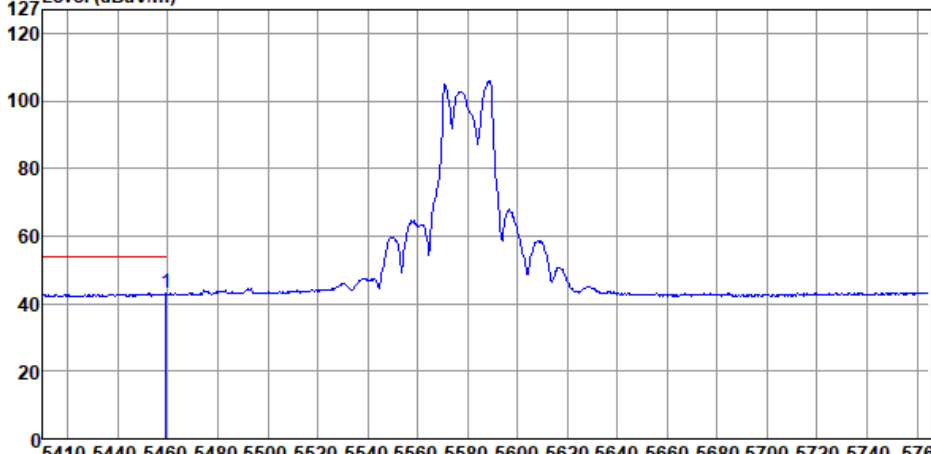Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5580																				
Polarization	Vertical-Average																						
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5459.35</td><td>42.91</td><td>54.00</td><td>-11.09</td><td>41.22</td><td>1.69</td><td>Average</td><td>238</td><td>243</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.35	42.91	54.00	-11.09	41.22	1.69	Average	238	243
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5459.35	42.91	54.00	-11.09	41.22	1.69	Average	238	243														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

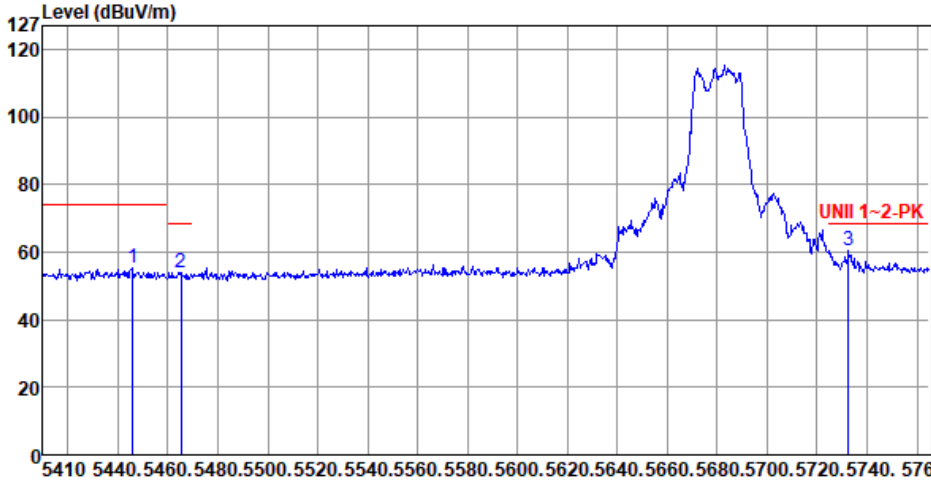Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5680																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5445.86</td><td>55.22</td><td>74.00</td><td>-18.78</td><td>53.56</td><td>1.66</td><td>Peak</td><td>306</td><td>194</td></tr><tr><td>2</td><td>5465.38</td><td>54.06</td><td>68.20</td><td>-14.14</td><td>52.36</td><td>1.70</td><td>Peak</td><td>306</td><td>194</td></tr><tr><td>3</td><td>5732.70</td><td>60.41</td><td>68.20</td><td>-7.79</td><td>58.22</td><td>2.19</td><td>Peak</td><td>306</td><td>194</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5445.86	55.22	74.00	-18.78	53.56	1.66	Peak	306	194	2	5465.38	54.06	68.20	-14.14	52.36	1.70	Peak	306	194	3	5732.70	60.41	68.20	-7.79	58.22	2.19	Peak	306	194
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5445.86	55.22	74.00	-18.78	53.56	1.66	Peak	306	194																																		
2	5465.38	54.06	68.20	-14.14	52.36	1.70	Peak	306	194																																		
3	5732.70	60.41	68.20	-7.79	58.22	2.19	Peak	306	194																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5680
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBUV/m)			



Band Edge measurement

Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5680																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																											
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5424.20</td><td>55.38</td><td>74.00</td><td>-18.62</td><td>53.77</td><td>1.61</td><td>Peak</td><td>297</td><td>278</td></tr><tr><td>2</td><td>5460.41</td><td>53.93</td><td>68.20</td><td>-14.27</td><td>52.24</td><td>1.69</td><td>Peak</td><td>297</td><td>278</td></tr><tr><td>3</td><td>5725.24</td><td>61.03</td><td>68.20</td><td>-7.17</td><td>58.87</td><td>2.16</td><td>Peak</td><td>297</td><td>278</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5424.20	55.38	74.00	-18.62	53.77	1.61	Peak	297	278	2	5460.41	53.93	68.20	-14.27	52.24	1.69	Peak	297	278	3	5725.24	61.03	68.20	-7.17	58.87	2.16	Peak	297	278
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5424.20	55.38	74.00	-18.62	53.77	1.61	Peak	297	278																																		
2	5460.41	53.93	68.20	-14.27	52.24	1.69	Peak	297	278																																		
3	5725.24	61.03	68.20	-7.17	58.87	2.16	Peak	297	278																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement


Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5680
Polarization	Vertical-Average		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBUV/m)			



Band Edge measurement


Appendix D

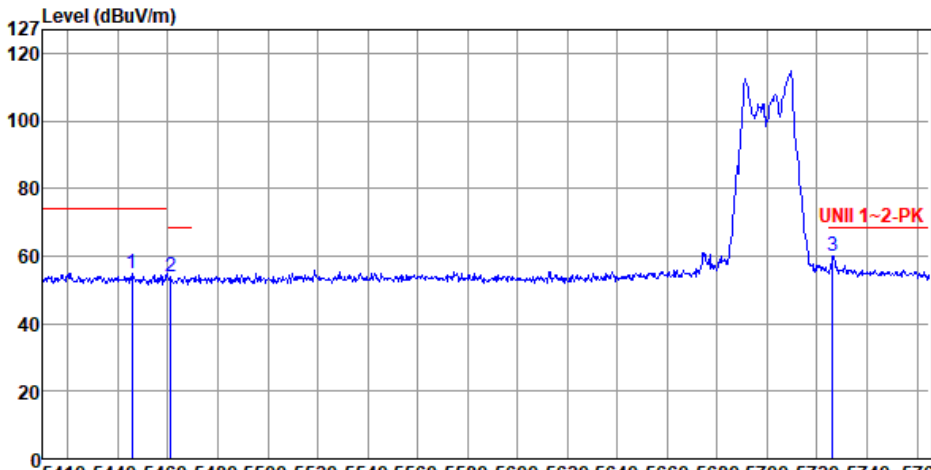Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5700																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5445.50</td><td>54.86</td><td>74.00</td><td>-19.14</td><td>53.20</td><td>1.66</td><td>Peak</td><td>235</td><td>283</td></tr><tr><td>2</td><td>5461.12</td><td>54.06</td><td>68.20</td><td>-14.14</td><td>52.37</td><td>1.69</td><td>Peak</td><td>235</td><td>283</td></tr><tr><td>3</td><td>5726.31</td><td>60.04</td><td>68.20</td><td>-8.16</td><td>57.87</td><td>2.17</td><td>Peak</td><td>235</td><td>283</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5445.50	54.86	74.00	-19.14	53.20	1.66	Peak	235	283	2	5461.12	54.06	68.20	-14.14	52.37	1.69	Peak	235	283	3	5726.31	60.04	68.20	-8.16	57.87	2.17	Peak	235	283
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5445.50	54.86	74.00	-19.14	53.20	1.66	Peak	235	283																																		
2	5461.12	54.06	68.20	-14.14	52.37	1.69	Peak	235	283																																		
3	5726.31	60.04	68.20	-8.16	57.87	2.17	Peak	235	283																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement


Appendix D

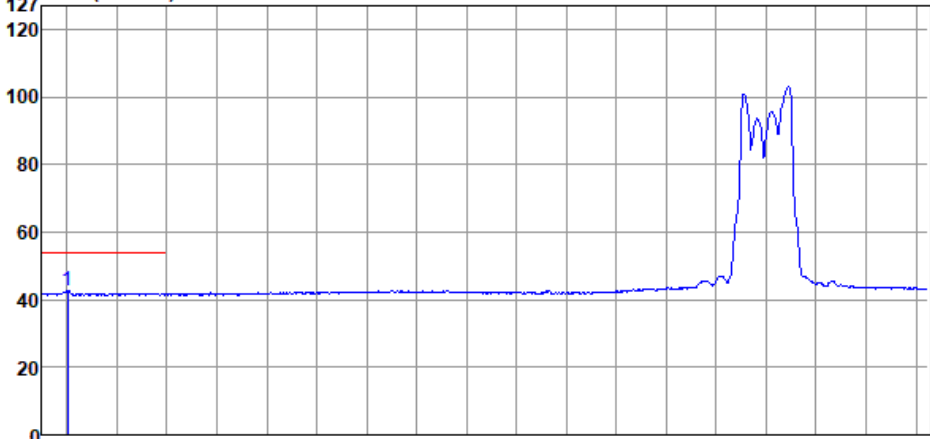Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5700						
Polarization	Horizontal-Average								
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5420.30	42.55	54.00	-11.45	40.96	1.59	Average	235	283
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Band Edge measurement

Appendix D

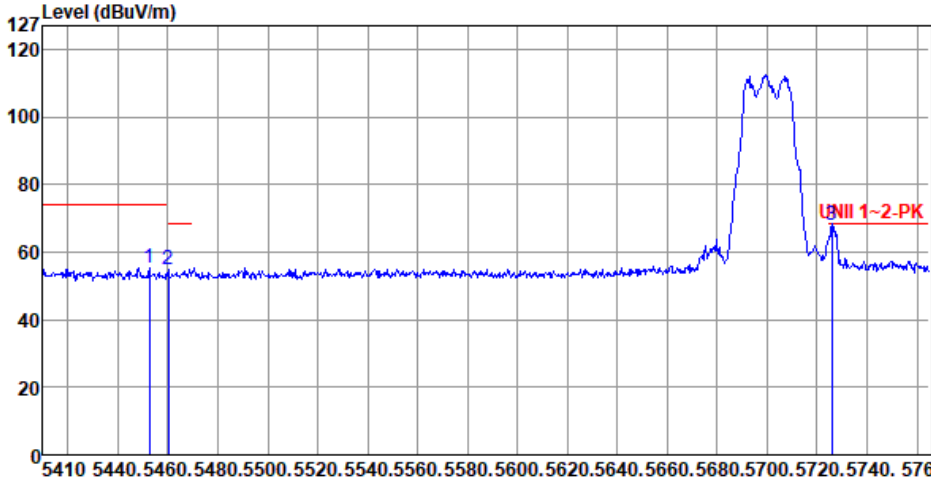Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5700																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5452.60</td><td>55.46</td><td>74.00</td><td>-18.54</td><td>53.79</td><td>1.67</td><td>Peak</td><td>134</td><td>226</td></tr><tr><td>2</td><td>5460.10</td><td>54.93</td><td>68.20</td><td>-13.27</td><td>53.24</td><td>1.69</td><td>Peak</td><td>134</td><td>226</td></tr><tr><td>3</td><td>5725.95</td><td>68.05</td><td>68.20</td><td>-0.15</td><td>65.89</td><td>2.16</td><td>Peak</td><td>134</td><td>226</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5452.60	55.46	74.00	-18.54	53.79	1.67	Peak	134	226	2	5460.10	54.93	68.20	-13.27	53.24	1.69	Peak	134	226	3	5725.95	68.05	68.20	-0.15	65.89	2.16	Peak	134	226
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5452.60	55.46	74.00	-18.54	53.79	1.67	Peak	134	226																																		
2	5460.10	54.93	68.20	-13.27	53.24	1.69	Peak	134	226																																		
3	5725.95	68.05	68.20	-0.15	65.89	2.16	Peak	134	226																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5700						
Polarization	Vertical-Average								
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5410.00	42.79	54.00	-11.21	41.21	1.58	Average	134	226
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Band Edge measurement

Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5745																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																	
Level (dBUV/m) UNII 3-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5648.00</td><td>56.91</td><td>68.20</td><td>-11.29</td><td>55.02</td><td>1.89</td><td>Peak</td><td>141</td><td>216</td></tr><tr><td>2</td><td>5972.38</td><td>55.56</td><td>68.20</td><td>-12.64</td><td>52.65</td><td>2.91</td><td>Peak</td><td>141</td><td>216</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5648.00	56.91	68.20	-11.29	55.02	1.89	Peak	141	216	2	5972.38	55.56	68.20	-12.64	52.65	2.91	Peak	141	216
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5648.00	56.91	68.20	-11.29	55.02	1.89	Peak	141	216																								
2	5972.38	55.56	68.20	-12.64	52.65	2.91	Peak	141	216																								



Band Edge measurement


Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5745																																																		
Polarization	Vertical-Peak																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																																					
Level (dBUV/m) UNI 3-PK Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5645.75</td><td>58.74</td><td>68.20</td><td>-9.46</td><td>56.85</td><td>1.89</td><td>Peak</td><td>307</td><td>262</td></tr><tr><td>2</td><td>5950.25</td><td>56.15</td><td>68.20</td><td>-12.05</td><td>53.30</td><td>2.85</td><td>Peak</td><td>307</td><td>262</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5645.75	58.74	68.20	-9.46	56.85	1.89	Peak	307	262	2	5950.25	56.15	68.20	-12.05	53.30	2.85	Peak	307	262
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5645.75	58.74	68.20	-9.46	56.85	1.89	Peak	307	262																																												
2	5950.25	56.15	68.20	-12.05	53.30	2.85	Peak	307	262																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

Appendix D

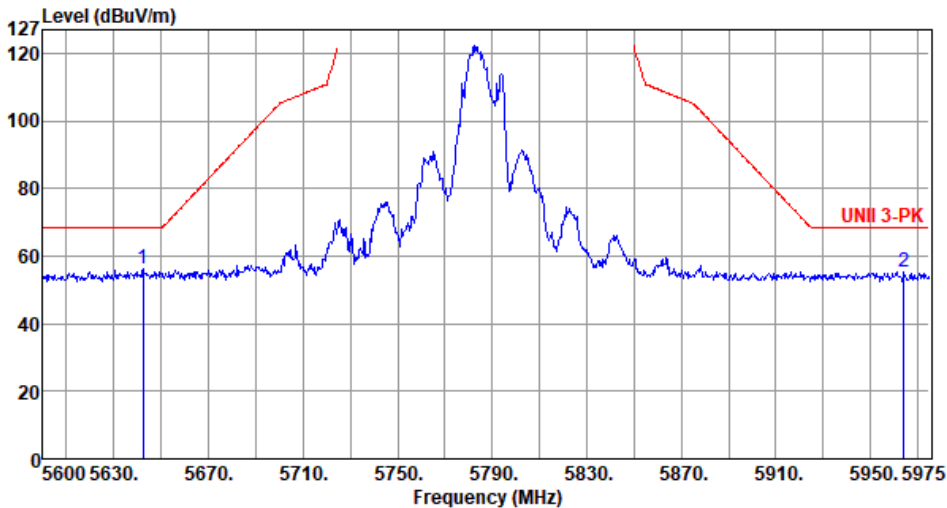Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5785																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5642.38</td><td>56.25</td><td>68.20</td><td>-11.95</td><td>54.36</td><td>1.89</td><td>Peak</td><td>311</td><td>216</td></tr><tr><td>2</td><td>5964.13</td><td>55.22</td><td>68.20</td><td>-12.98</td><td>52.33</td><td>2.89</td><td>Peak</td><td>311</td><td>216</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5642.38	56.25	68.20	-11.95	54.36	1.89	Peak	311	216	2	5964.13	55.22	68.20	-12.98	52.33	2.89	Peak	311	216
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5642.38	56.25	68.20	-11.95	54.36	1.89	Peak	311	216																								
2	5964.13	55.22	68.20	-12.98	52.33	2.89	Peak	311	216																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5785
Polarization	Vertical-Peak		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) </			



Band Edge measurement


Appendix D

Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5825																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																	
Level (dBuV/m) 1 2 Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5606.75</td><td>56.37</td><td>68.20</td><td>-11.83</td><td>54.51</td><td>1.86</td><td>Peak</td><td>315</td><td>214</td></tr><tr><td>2</td><td>5974.63</td><td>57.23</td><td>68.20</td><td>-10.97</td><td>54.31</td><td>2.92</td><td>Peak</td><td>315</td><td>214</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5606.75	56.37	68.20	-11.83	54.51	1.86	Peak	315	214	2	5974.63	57.23	68.20	-10.97	54.31	2.92	Peak	315	214
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5606.75	56.37	68.20	-11.83	54.51	1.86	Peak	315	214																								
2	5974.63	57.23	68.20	-10.97	54.31	2.92	Peak	315	214																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

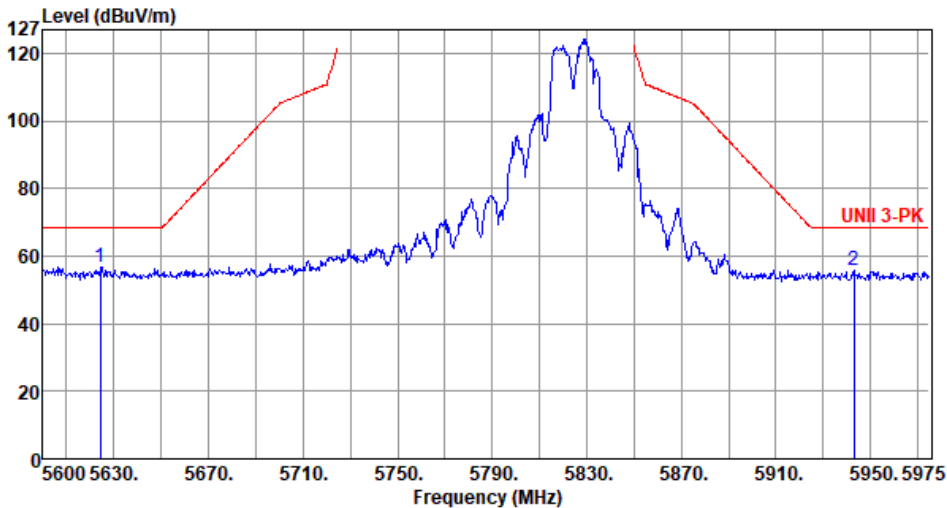Modulation	be EHT20_OFDMA	Test Freq. (MHz)	5825																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5624.38</td><td>56.90</td><td>68.20</td><td>-11.30</td><td>55.03</td><td>1.87</td><td>Peak</td><td>299</td><td>267</td></tr><tr><td>2</td><td>5943.13</td><td>55.80</td><td>68.20</td><td>-12.40</td><td>52.96</td><td>2.84</td><td>Peak</td><td>299</td><td>267</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5624.38	56.90	68.20	-11.30	55.03	1.87	Peak	299	267	2	5943.13	55.80	68.20	-12.40	52.96	2.84	Peak	299	267
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5624.38	56.90	68.20	-11.30	55.03	1.87	Peak	299	267																								
2	5943.13	55.80	68.20	-12.40	52.96	2.84	Peak	299	267																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

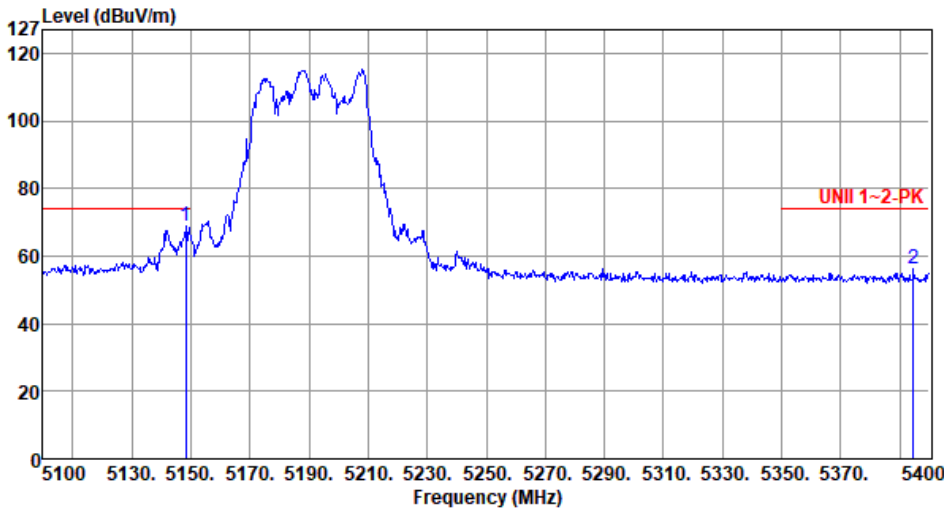Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5190																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.30</td><td>68.69</td><td>74.00</td><td>-5.31</td><td>66.69</td><td>2.00</td><td>Peak</td><td>304</td><td>189</td></tr><tr><td>2</td><td>5394.60</td><td>56.12</td><td>74.00</td><td>-17.88</td><td>54.59</td><td>1.53</td><td>Peak</td><td>304</td><td>189</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.30	68.69	74.00	-5.31	66.69	2.00	Peak	304	189	2	5394.60	56.12	74.00	-17.88	54.59	1.53	Peak	304	189
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.30	68.69	74.00	-5.31	66.69	2.00	Peak	304	189																								
2	5394.60	56.12	74.00	-17.88	54.59	1.53	Peak	304	189																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement


Appendix D

Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5190																														
Polarization	Horizontal-Average																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m) 127 120 100 80 60 40 20 0 5100 5130 5150 5170 5190 5210 5230 5250 5270 5290 5310 5330 5350 5370 5400 Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.60</td><td>53.46</td><td>54.00</td><td>-0.54</td><td>51.46</td><td>2.00</td><td>Average</td><td>304</td><td>189</td></tr><tr><td>2</td><td>5393.40</td><td>42.90</td><td>54.00</td><td>-11.10</td><td>41.37</td><td>1.53</td><td>Average</td><td>304</td><td>189</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.60	53.46	54.00	-0.54	51.46	2.00	Average	304	189	2	5393.40	42.90	54.00	-11.10	41.37	1.53	Average	304	189
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.60	53.46	54.00	-0.54	51.46	2.00	Average	304	189																								
2	5393.40	42.90	54.00	-11.10	41.37	1.53	Average	304	189																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

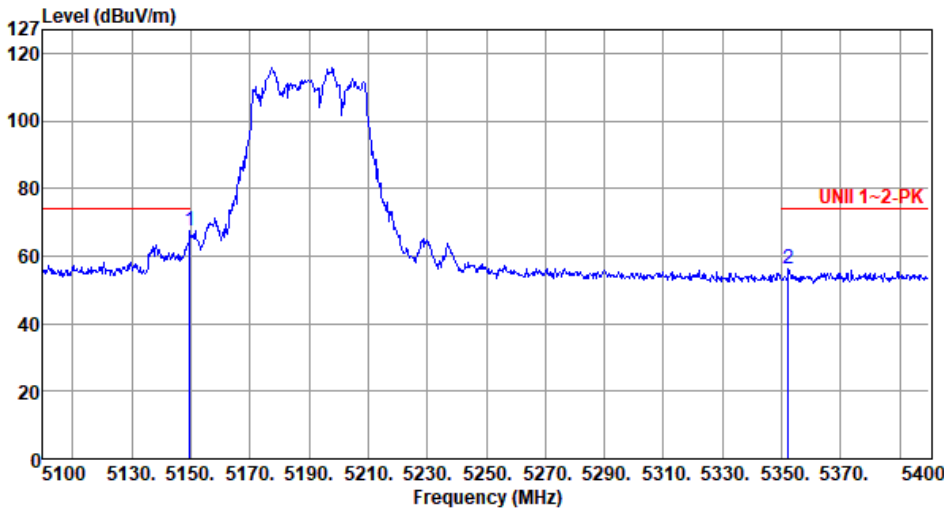Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5190																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.80</td><td>67.38</td><td>74.00</td><td>-6.62</td><td>65.38</td><td>2.00</td><td>Peak</td><td>137</td><td>259</td></tr><tr><td>2</td><td>5352.30</td><td>56.27</td><td>74.00</td><td>-17.73</td><td>54.86</td><td>1.41</td><td>Peak</td><td>137</td><td>259</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	67.38	74.00	-6.62	65.38	2.00	Peak	137	259	2	5352.30	56.27	74.00	-17.73	54.86	1.41	Peak	137	259
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	67.38	74.00	-6.62	65.38	2.00	Peak	137	259																								
2	5352.30	56.27	74.00	-17.73	54.86	1.41	Peak	137	259																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

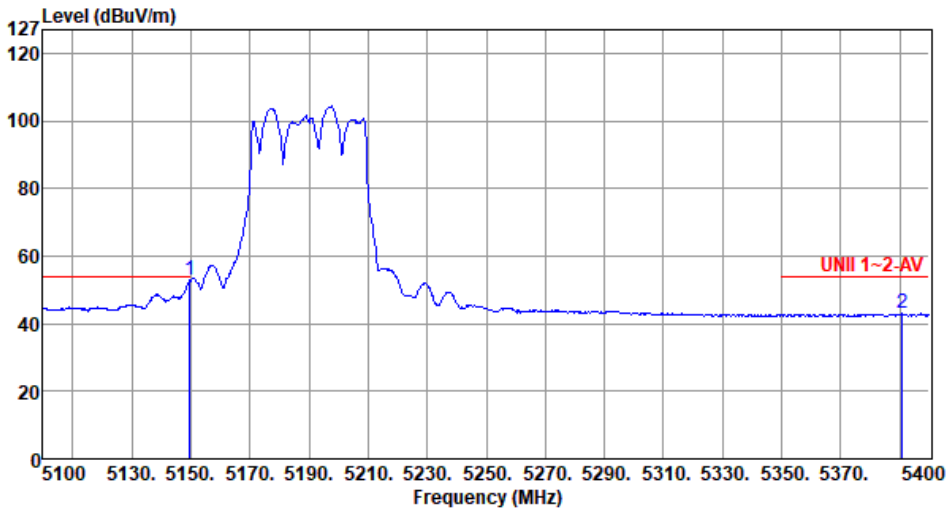Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5190																														
Polarization	Vertical-Average																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.80</td><td>52.82</td><td>54.00</td><td>-1.18</td><td>50.82</td><td>2.00</td><td>Average</td><td>137</td><td>259</td></tr><tr><td>2</td><td>5390.70</td><td>42.97</td><td>54.00</td><td>-11.03</td><td>41.45</td><td>1.52</td><td>Average</td><td>137</td><td>259</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	52.82	54.00	-1.18	50.82	2.00	Average	137	259	2	5390.70	42.97	54.00	-11.03	41.45	1.52	Average	137	259
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	52.82	54.00	-1.18	50.82	2.00	Average	137	259																								
2	5390.70	42.97	54.00	-11.03	41.45	1.52	Average	137	259																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5230																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5147.10</td><td>60.38</td><td>74.00</td><td>-13.62</td><td>58.39</td><td>1.99</td><td>Peak</td><td>307</td><td>213</td></tr><tr><td>2</td><td>5385.00</td><td>56.42</td><td>74.00</td><td>-17.58</td><td>54.92</td><td>1.50</td><td>Peak</td><td>307</td><td>213</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5147.10	60.38	74.00	-13.62	58.39	1.99	Peak	307	213	2	5385.00	56.42	74.00	-17.58	54.92	1.50	Peak	307	213
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5147.10	60.38	74.00	-13.62	58.39	1.99	Peak	307	213																								
2	5385.00	56.42	74.00	-17.58	54.92	1.50	Peak	307	213																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

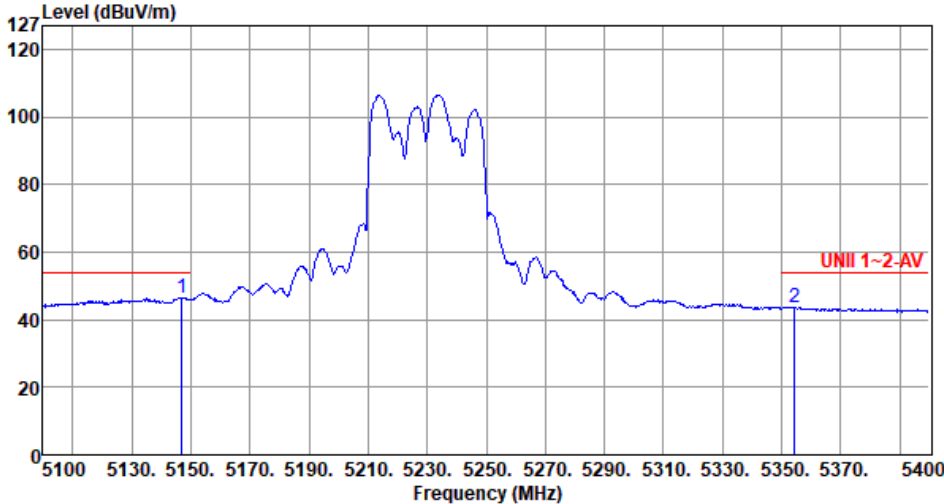Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5230																														
Polarization	Horizontal-Average																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5147.10</td><td>46.54</td><td>54.00</td><td>-7.46</td><td>44.55</td><td>1.99</td><td>Average</td><td>307</td><td>213</td></tr><tr><td>2</td><td>5354.40</td><td>43.80</td><td>54.00</td><td>-10.20</td><td>42.38</td><td>1.42</td><td>Average</td><td>307</td><td>213</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5147.10	46.54	54.00	-7.46	44.55	1.99	Average	307	213	2	5354.40	43.80	54.00	-10.20	42.38	1.42	Average	307	213
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5147.10	46.54	54.00	-7.46	44.55	1.99	Average	307	213																								
2	5354.40	43.80	54.00	-10.20	42.38	1.42	Average	307	213																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement


Appendix D

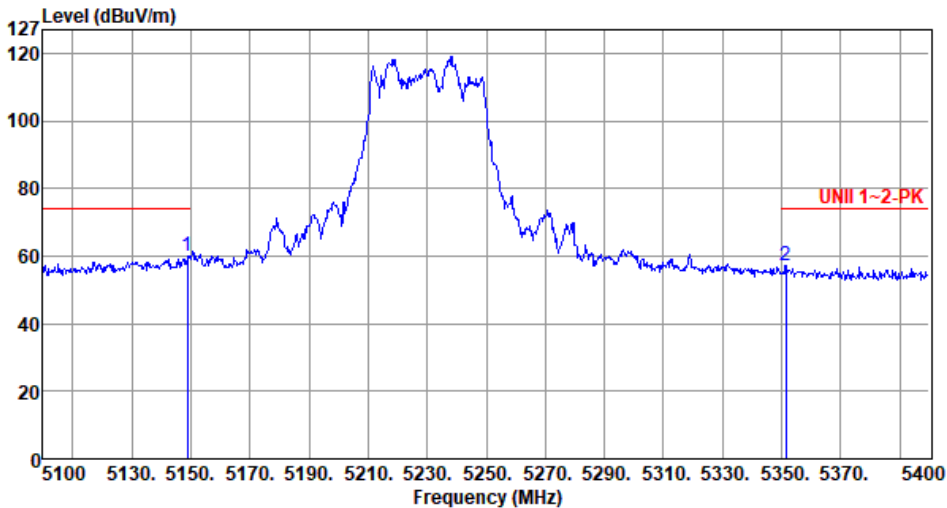Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5230																																																		
Polarization	Vertical-Peak																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.90</td><td>60.11</td><td>74.00</td><td>-13.89</td><td>58.11</td><td>2.00</td><td>Peak</td><td>123</td><td>256</td></tr><tr><td>2</td><td>5351.40</td><td>57.17</td><td>74.00</td><td>-16.83</td><td>55.76</td><td>1.41</td><td>Peak</td><td>123</td><td>256</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5148.90	60.11	74.00	-13.89	58.11	2.00	Peak	123	256	2	5351.40	57.17	74.00	-16.83	55.76	1.41	Peak	123	256
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5148.90	60.11	74.00	-13.89	58.11	2.00	Peak	123	256																																												
2	5351.40	57.17	74.00	-16.83	55.76	1.41	Peak	123	256																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement


Appendix D

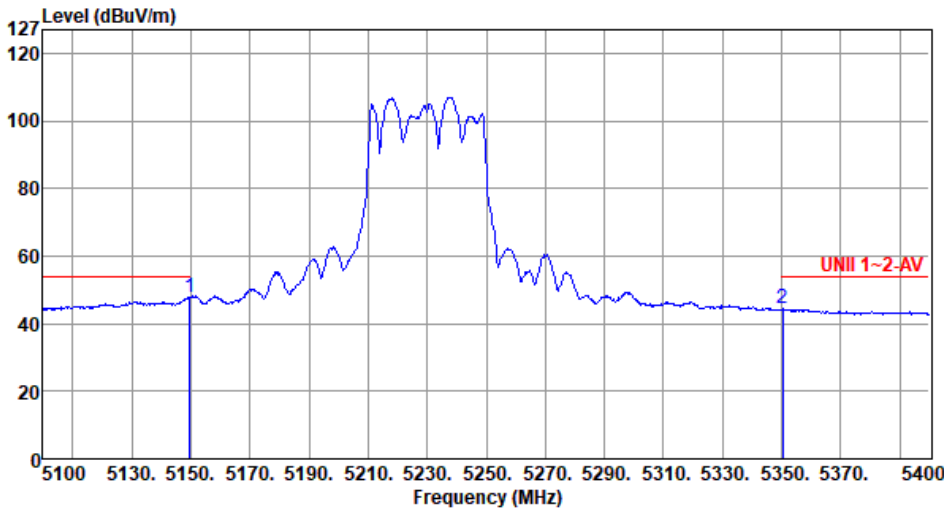Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5230																																								
Polarization	Vertical-Average																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><td>1</td><td>5149.80</td><td>47.95</td><td>54.00</td><td>-6.05</td><td>45.95</td><td>2.00</td><td>Average</td><td>123</td><td>256</td></tr><tr><td>2</td><td>5350.20</td><td>44.32</td><td>54.00</td><td>-9.68</td><td>42.91</td><td>1.41</td><td>Average</td><td>123</td><td>256</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table	1	5149.80	47.95	54.00	-6.05	45.95	2.00	Average	123	256	2	5350.20	44.32	54.00	-9.68	42.91	1.41	Average	123	256
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																		
1	5149.80	47.95	54.00	-6.05	45.95	2.00	Average	123	256																																		
2	5350.20	44.32	54.00	-9.68	42.91	1.41	Average	123	256																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

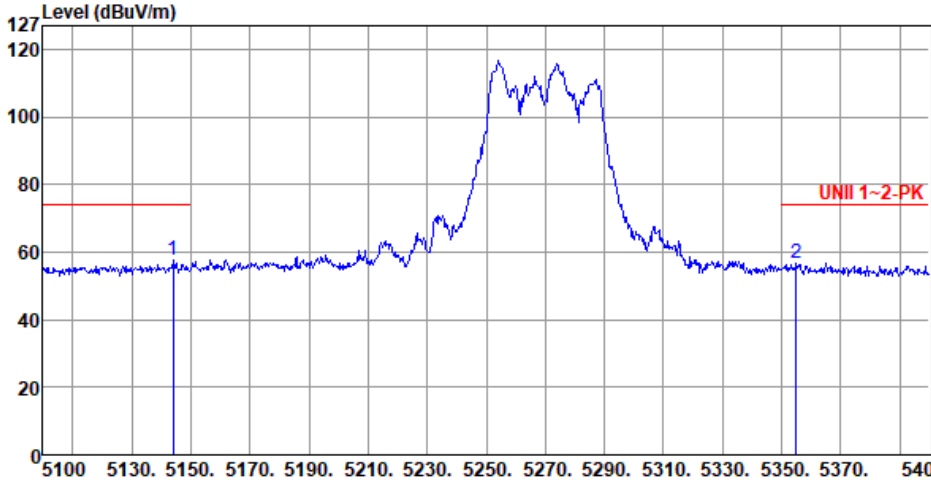Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5270																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5144.10</td><td>57.58</td><td>74.00</td><td>-16.42</td><td>55.59</td><td>1.99</td><td>Peak</td><td>304</td><td>209</td></tr><tr><td>2</td><td>5355.00</td><td>56.54</td><td>74.00</td><td>-17.46</td><td>55.12</td><td>1.42</td><td>Peak</td><td>304</td><td>209</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5144.10	57.58	74.00	-16.42	55.59	1.99	Peak	304	209	2	5355.00	56.54	74.00	-17.46	55.12	1.42	Peak	304	209
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5144.10	57.58	74.00	-16.42	55.59	1.99	Peak	304	209																								
2	5355.00	56.54	74.00	-17.46	55.12	1.42	Peak	304	209																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5270																																																		
Polarization	Horizontal-Average																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
Level (dBuV/m) 127 120 100 80 60 40 20 0 5100 5130. 5150. 5170. 5190. 5210. 5230. 5250. 5270. 5290. 5310. 5330. 5350. 5370. 5400 Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.10</td><td>44.51</td><td>54.00</td><td>-9.49</td><td>42.52</td><td>1.99</td><td>Average</td><td>304</td><td>209</td></tr><tr><td>2</td><td>5353.20</td><td>44.30</td><td>54.00</td><td>-9.70</td><td>42.88</td><td>1.42</td><td>Average</td><td>304</td><td>209</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5147.10	44.51	54.00	-9.49	42.52	1.99	Average	304	209	2	5353.20	44.30	54.00	-9.70	42.88	1.42	Average	304	209
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5147.10	44.51	54.00	-9.49	42.52	1.99	Average	304	209																																												
2	5353.20	44.30	54.00	-9.70	42.88	1.42	Average	304	209																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement


Appendix D

Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5270																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5111.70</td><td>56.64</td><td>74.00</td><td>-17.36</td><td>54.73</td><td>1.91</td><td>Peak</td><td>168</td><td>250</td></tr><tr><td>2</td><td>5361.30</td><td>56.79</td><td>74.00</td><td>-17.21</td><td>55.35</td><td>1.44</td><td>Peak</td><td>168</td><td>250</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5111.70	56.64	74.00	-17.36	54.73	1.91	Peak	168	250	2	5361.30	56.79	74.00	-17.21	55.35	1.44	Peak	168	250
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5111.70	56.64	74.00	-17.36	54.73	1.91	Peak	168	250																								
2	5361.30	56.79	74.00	-17.21	55.35	1.44	Peak	168	250																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

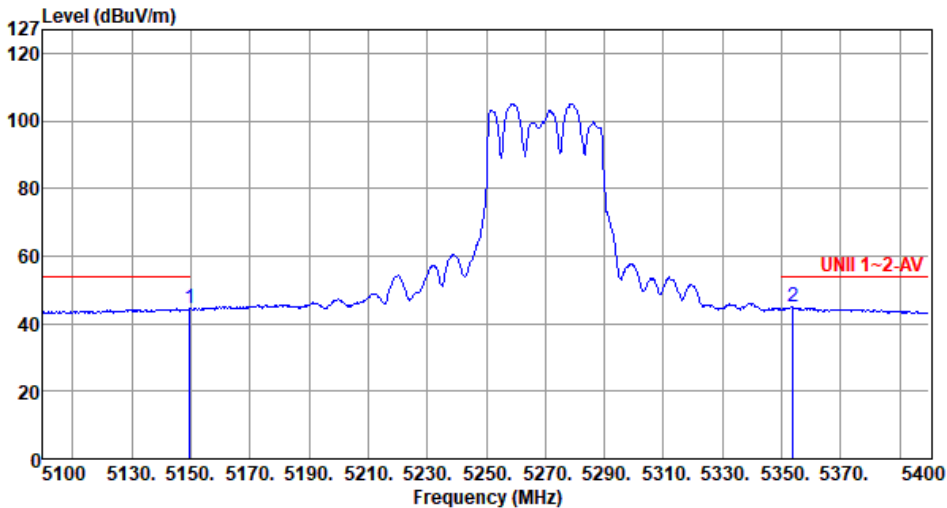Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5270																														
Polarization	Vertical-Average																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.80</td><td>44.43</td><td>54.00</td><td>-9.57</td><td>42.43</td><td>2.00</td><td>Average</td><td>168</td><td>250</td></tr><tr><td>2</td><td>5353.80</td><td>44.87</td><td>54.00</td><td>-9.13</td><td>43.45</td><td>1.42</td><td>Average</td><td>168</td><td>250</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	44.43	54.00	-9.57	42.43	2.00	Average	168	250	2	5353.80	44.87	54.00	-9.13	43.45	1.42	Average	168	250
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	44.43	54.00	-9.57	42.43	2.00	Average	168	250																								
2	5353.80	44.87	54.00	-9.13	43.45	1.42	Average	168	250																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

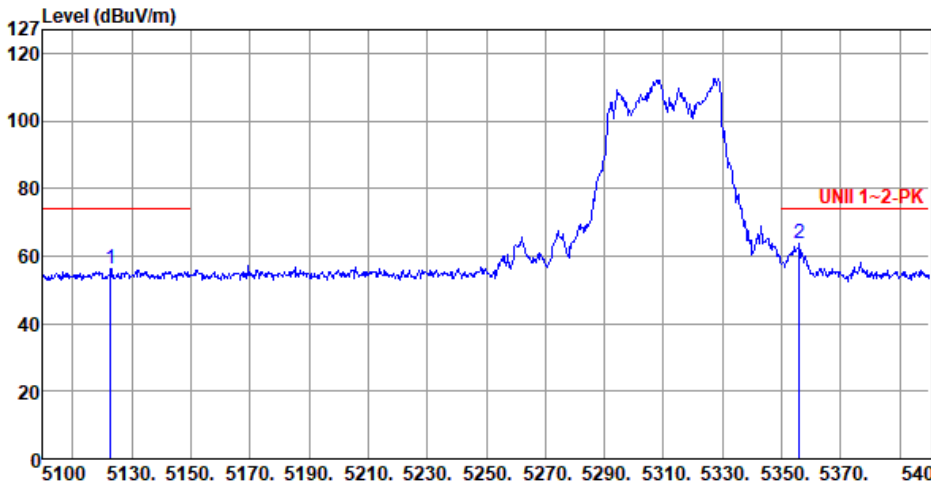Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5310																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5122.80</td><td>56.31</td><td>74.00</td><td>-17.69</td><td>54.36</td><td>1.95</td><td>Peak</td><td>303</td><td>175</td></tr><tr><td>2</td><td>5355.90</td><td>63.55</td><td>74.00</td><td>-10.45</td><td>62.12</td><td>1.43</td><td>Peak</td><td>303</td><td>175</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5122.80	56.31	74.00	-17.69	54.36	1.95	Peak	303	175	2	5355.90	63.55	74.00	-10.45	62.12	1.43	Peak	303	175
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	5122.80	56.31	74.00	-17.69	54.36	1.95	Peak	303	175																																		
2	5355.90	63.55	74.00	-10.45	62.12	1.43	Peak	303	175																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement


Appendix D

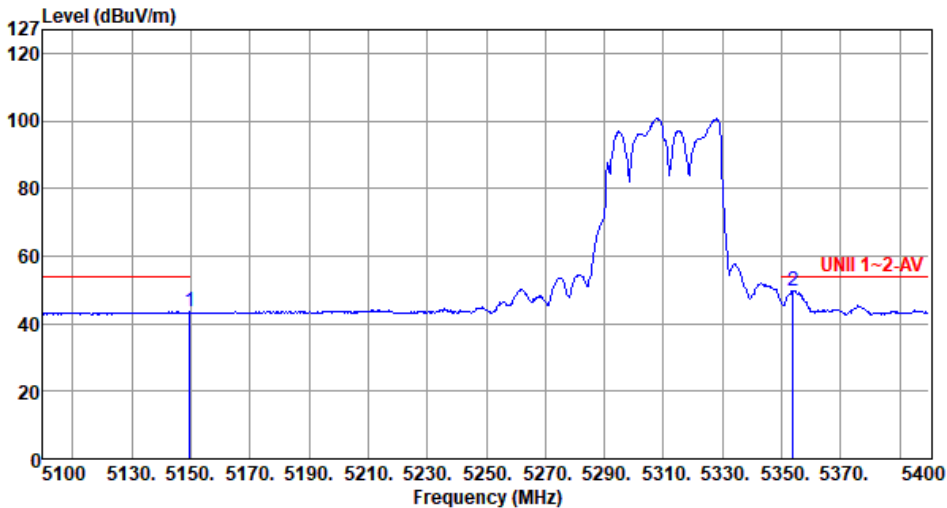Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5310																																																		
Polarization	Horizontal-Average																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.80</td><td>43.66</td><td>54.00</td><td>-10.34</td><td>41.66</td><td>2.00</td><td>Average</td><td>303</td><td>175</td></tr><tr><td>2</td><td>5353.80</td><td>49.76</td><td>54.00</td><td>-4.24</td><td>48.34</td><td>1.42</td><td>Average</td><td>303</td><td>175</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5149.80	43.66	54.00	-10.34	41.66	2.00	Average	303	175	2	5353.80	49.76	54.00	-4.24	48.34	1.42	Average	303	175
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5149.80	43.66	54.00	-10.34	41.66	2.00	Average	303	175																																												
2	5353.80	49.76	54.00	-4.24	48.34	1.42	Average	303	175																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement


Appendix D

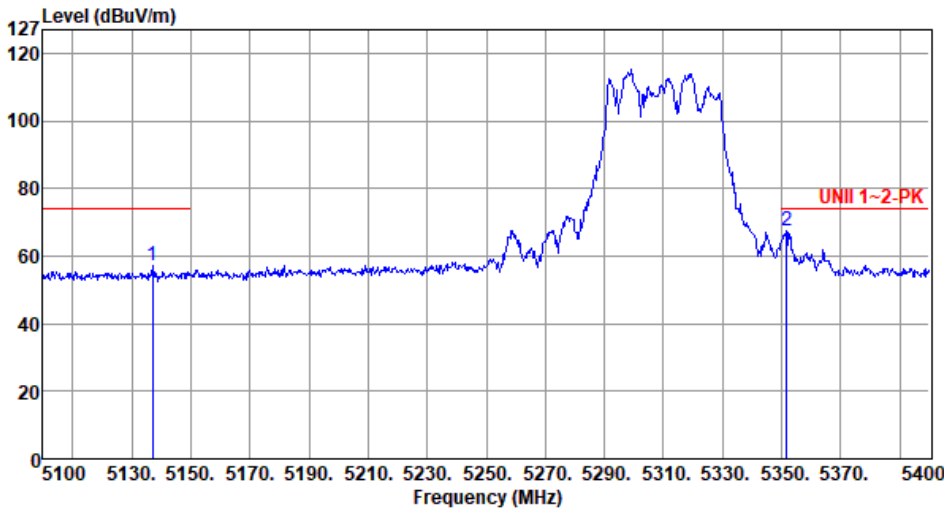Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5310																																																		
Polarization	Vertical-Peak																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5137.20</td><td>57.21</td><td>74.00</td><td>-16.79</td><td>55.25</td><td>1.96</td><td>Peak</td><td>122</td><td>255</td></tr><tr><td>2</td><td>5351.70</td><td>67.30</td><td>74.00</td><td>-6.70</td><td>65.89</td><td>1.41</td><td>Peak</td><td>122</td><td>255</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5137.20	57.21	74.00	-16.79	55.25	1.96	Peak	122	255	2	5351.70	67.30	74.00	-6.70	65.89	1.41	Peak	122	255
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5137.20	57.21	74.00	-16.79	55.25	1.96	Peak	122	255																																												
2	5351.70	67.30	74.00	-6.70	65.89	1.41	Peak	122	255																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement


Appendix D

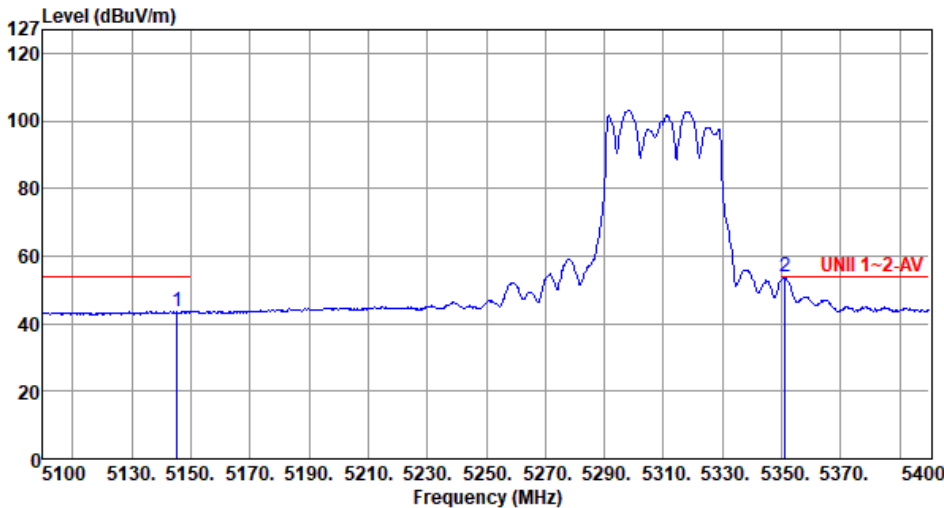Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5310																														
Polarization	Vertical-Average																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5145.30</td><td>43.62</td><td>54.00</td><td>-10.38</td><td>41.63</td><td>1.99</td><td>Average</td><td>122</td><td>255</td></tr><tr><td>2</td><td>5351.10</td><td>53.72</td><td>54.00</td><td>-0.28</td><td>52.31</td><td>1.41</td><td>Average</td><td>122</td><td>255</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5145.30	43.62	54.00	-10.38	41.63	1.99	Average	122	255	2	5351.10	53.72	54.00	-0.28	52.31	1.41	Average	122	255
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5145.30	43.62	54.00	-10.38	41.63	1.99	Average	122	255																								
2	5351.10	53.72	54.00	-0.28	52.31	1.41	Average	122	255																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement


Appendix D

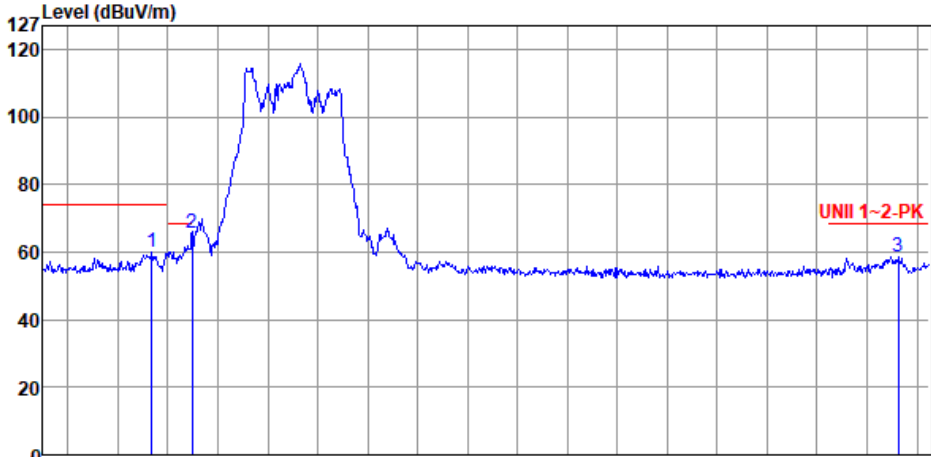Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5510																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5453.67</td><td>59.97</td><td>74.00</td><td>-14.03</td><td>58.30</td><td>1.67</td><td>Peak</td><td>238</td><td>221</td></tr><tr><td>2</td><td>5469.64</td><td>65.61</td><td>68.20</td><td>-2.59</td><td>63.89</td><td>1.72</td><td>Peak</td><td>238</td><td>221</td></tr><tr><td>3</td><td>5752.58</td><td>58.52</td><td>68.20</td><td>-9.68</td><td>56.24</td><td>2.28</td><td>Peak</td><td>238</td><td>221</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5453.67	59.97	74.00	-14.03	58.30	1.67	Peak	238	221	2	5469.64	65.61	68.20	-2.59	63.89	1.72	Peak	238	221	3	5752.58	58.52	68.20	-9.68	56.24	2.28	Peak	238	221
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5453.67	59.97	74.00	-14.03	58.30	1.67	Peak	238	221																																		
2	5469.64	65.61	68.20	-2.59	63.89	1.72	Peak	238	221																																		
3	5752.58	58.52	68.20	-9.68	56.24	2.28	Peak	238	221																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement


Appendix D

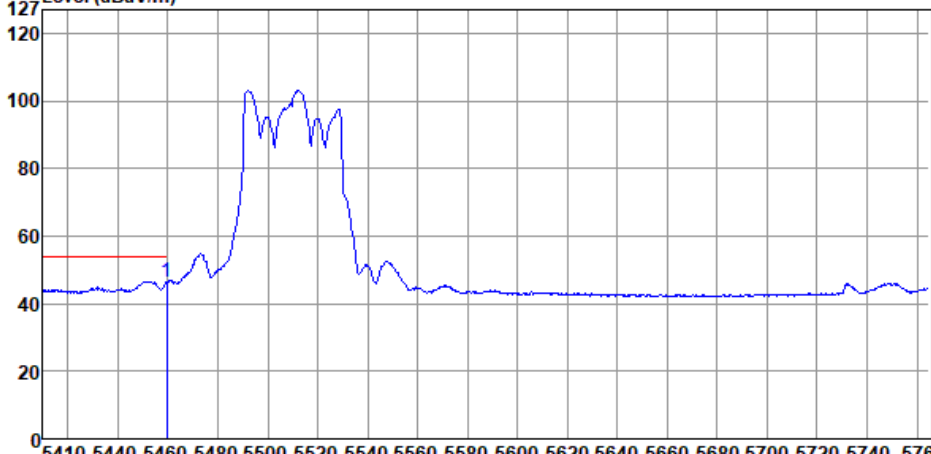Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5510																				
Polarization	Horizontal-Average																						
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5459.70</td><td>46.58</td><td>54.00</td><td>-7.42</td><td>44.89</td><td>1.69</td><td>Average</td><td>238</td><td>221</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.70	46.58	54.00	-7.42	44.89	1.69	Average	238	221
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5459.70	46.58	54.00	-7.42	44.89	1.69	Average	238	221														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

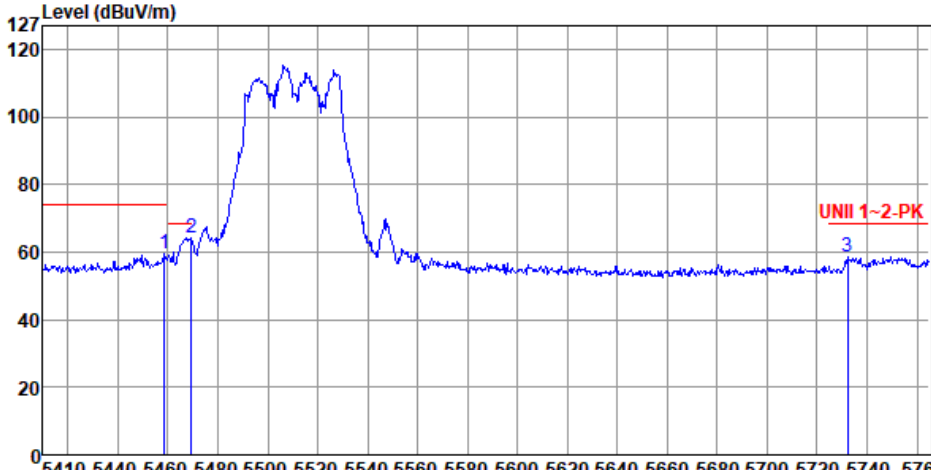Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5510																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5458.64</td><td>59.60</td><td>74.00</td><td>-14.40</td><td>57.91</td><td>1.69</td><td>Peak</td><td>324</td><td>258</td></tr><tr><td>2</td><td>5469.29</td><td>64.26</td><td>68.20</td><td>-3.94</td><td>62.54</td><td>1.72</td><td>Peak</td><td>324</td><td>258</td></tr><tr><td>3</td><td>5732.34</td><td>58.68</td><td>68.20</td><td>-9.52</td><td>56.49</td><td>2.19</td><td>Peak</td><td>324</td><td>258</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5458.64	59.60	74.00	-14.40	57.91	1.69	Peak	324	258	2	5469.29	64.26	68.20	-3.94	62.54	1.72	Peak	324	258	3	5732.34	58.68	68.20	-9.52	56.49	2.19	Peak	324	258
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5458.64	59.60	74.00	-14.40	57.91	1.69	Peak	324	258																																		
2	5469.29	64.26	68.20	-3.94	62.54	1.72	Peak	324	258																																		
3	5732.34	58.68	68.20	-9.52	56.49	2.19	Peak	324	258																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement


Appendix D

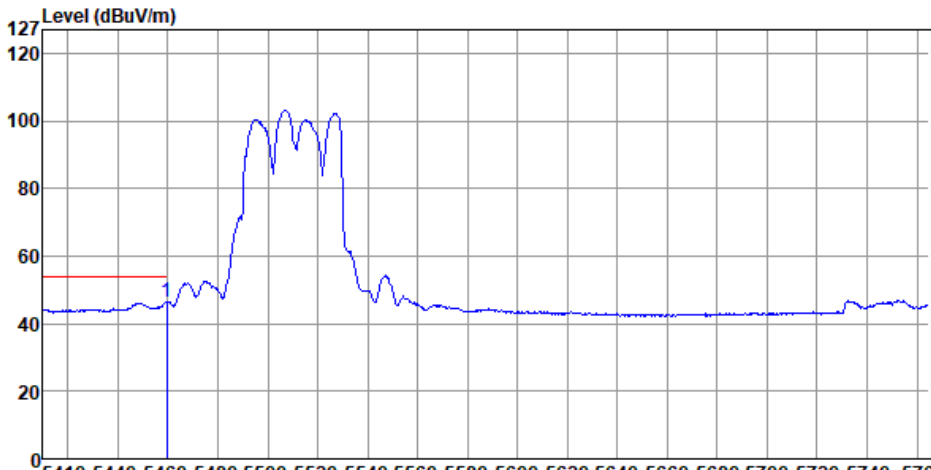Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5510																				
Polarization	Vertical-Average																						
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5459.70</td><td>46.49</td><td>54.00</td><td>-7.51</td><td>44.80</td><td>1.69</td><td>Average</td><td>324</td><td>258</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.70	46.49	54.00	-7.51	44.80	1.69	Average	324	258
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5459.70	46.49	54.00	-7.51	44.80	1.69	Average	324	258														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

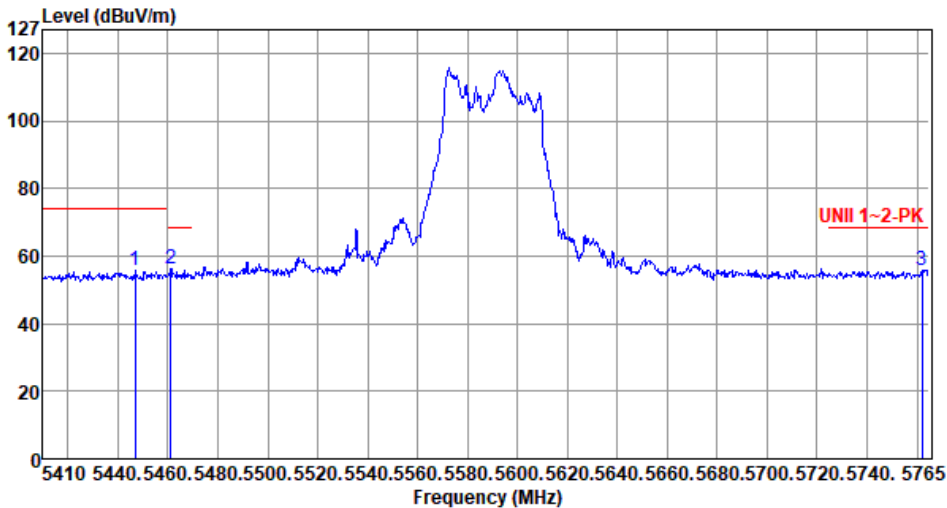Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5590																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5446.92</td><td>55.64</td><td>74.00</td><td>-18.36</td><td>53.99</td><td>1.65</td><td>Peak</td><td>317</td><td>207</td></tr><tr><td>2</td><td>5461.12</td><td>56.34</td><td>68.20</td><td>-11.86</td><td>54.65</td><td>1.69</td><td>Peak</td><td>317</td><td>207</td></tr><tr><td>3</td><td>5762.16</td><td>55.94</td><td>68.20</td><td>-12.26</td><td>53.61</td><td>2.33</td><td>Peak</td><td>317</td><td>207</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5446.92	55.64	74.00	-18.36	53.99	1.65	Peak	317	207	2	5461.12	56.34	68.20	-11.86	54.65	1.69	Peak	317	207	3	5762.16	55.94	68.20	-12.26	53.61	2.33	Peak	317	207
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5446.92	55.64	74.00	-18.36	53.99	1.65	Peak	317	207																																		
2	5461.12	56.34	68.20	-11.86	54.65	1.69	Peak	317	207																																		
3	5762.16	55.94	68.20	-12.26	53.61	2.33	Peak	317	207																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement


Appendix D

Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5590																				
Polarization	Horizontal-Average																						
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																							
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5459.70</td><td>43.13</td><td>54.00</td><td>-10.87</td><td>41.44</td><td>1.69</td><td>Average</td><td>317</td><td>207</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.70	43.13	54.00	-10.87	41.44	1.69	Average	317	207
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5459.70	43.13	54.00	-10.87	41.44	1.69	Average	317	207														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

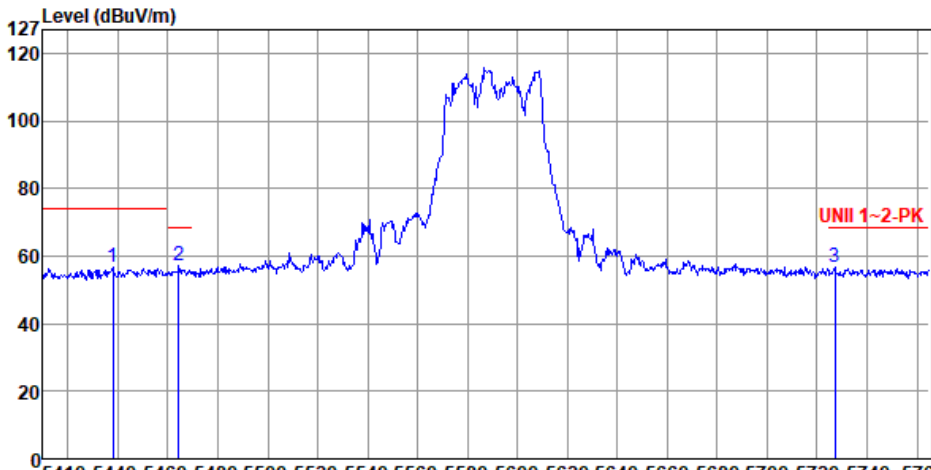Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5590																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5438.05</td><td>56.66</td><td>74.00</td><td>-17.34</td><td>55.02</td><td>1.64</td><td>Peak</td><td>322</td><td>249</td></tr><tr><td>2</td><td>5464.32</td><td>56.99</td><td>68.20</td><td>-11.21</td><td>55.29</td><td>1.70</td><td>Peak</td><td>322</td><td>249</td></tr><tr><td>3</td><td>5727.02</td><td>56.78</td><td>68.20</td><td>-11.42</td><td>54.61</td><td>2.17</td><td>Peak</td><td>322</td><td>249</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5438.05	56.66	74.00	-17.34	55.02	1.64	Peak	322	249	2	5464.32	56.99	68.20	-11.21	55.29	1.70	Peak	322	249	3	5727.02	56.78	68.20	-11.42	54.61	2.17	Peak	322	249
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5438.05	56.66	74.00	-17.34	55.02	1.64	Peak	322	249																																		
2	5464.32	56.99	68.20	-11.21	55.29	1.70	Peak	322	249																																		
3	5727.02	56.78	68.20	-11.42	54.61	2.17	Peak	322	249																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

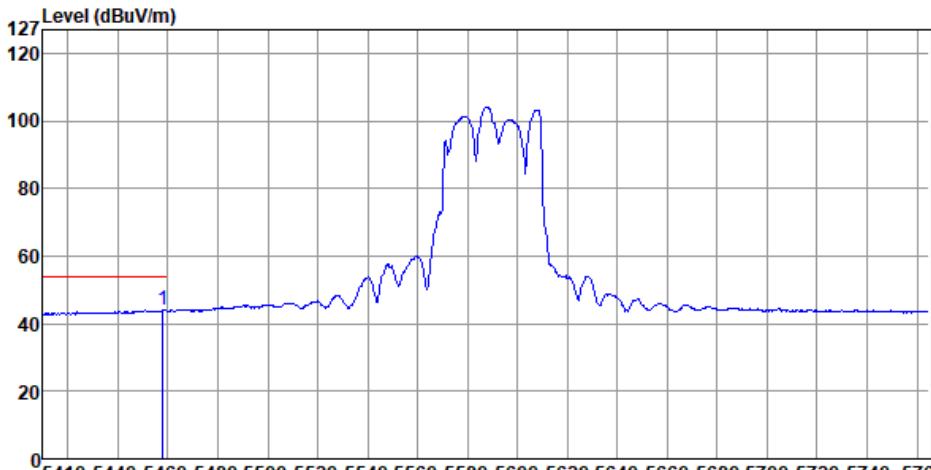Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5590																											
Polarization	Vertical-Average																													
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																														
Level (dBUV/m)  Frequency (MHz) <table><tr><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>High cm</th><th>Table deg</th></tr><tr><td>1 5457.93</td><td>44.04</td><td>54.00</td><td>-9.96</td><td>42.35</td><td>1.69</td><td>Average</td><td>322</td><td>249</td></tr></table>				Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT	Turn	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		High cm	Table deg	1 5457.93	44.04	54.00	-9.96	42.35	1.69	Average	322	249
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT	Turn																						
MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		High cm	Table deg																						
1 5457.93	44.04	54.00	-9.96	42.35	1.69	Average	322	249																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																														



Band Edge measurement

Appendix D

Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5670																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5431.30</td><td>56.06</td><td>74.00</td><td>-17.94</td><td>54.44</td><td>1.62</td><td>Peak</td><td>313</td><td>204</td></tr><tr><td>2</td><td>5467.87</td><td>54.33</td><td>68.20</td><td>-13.87</td><td>52.62</td><td>1.71</td><td>Peak</td><td>313</td><td>204</td></tr><tr><td>3</td><td>5731.63</td><td>58.62</td><td>68.20</td><td>-9.58</td><td>56.43</td><td>2.19</td><td>Peak</td><td>313</td><td>204</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5431.30	56.06	74.00	-17.94	54.44	1.62	Peak	313	204	2	5467.87	54.33	68.20	-13.87	52.62	1.71	Peak	313	204	3	5731.63	58.62	68.20	-9.58	56.43	2.19	Peak	313	204
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5431.30	56.06	74.00	-17.94	54.44	1.62	Peak	313	204																																		
2	5467.87	54.33	68.20	-13.87	52.62	1.71	Peak	313	204																																		
3	5731.63	58.62	68.20	-9.58	56.43	2.19	Peak	313	204																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5670
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) </			



Band Edge measurement


Appendix D

Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5670																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5439.82</td><td>56.73</td><td>74.00</td><td>-17.27</td><td>55.08</td><td>1.65</td><td>Peak</td><td>324</td><td>264</td></tr><tr><td>2</td><td>5461.83</td><td>55.28</td><td>68.20</td><td>-12.92</td><td>53.59</td><td>1.69</td><td>Peak</td><td>324</td><td>264</td></tr><tr><td>3</td><td>5727.73</td><td>62.42</td><td>68.20</td><td>-5.78</td><td>60.25</td><td>2.17</td><td>Peak</td><td>324</td><td>264</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5439.82	56.73	74.00	-17.27	55.08	1.65	Peak	324	264	2	5461.83	55.28	68.20	-12.92	53.59	1.69	Peak	324	264	3	5727.73	62.42	68.20	-5.78	60.25	2.17	Peak	324	264
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5439.82	56.73	74.00	-17.27	55.08	1.65	Peak	324	264																																		
2	5461.83	55.28	68.20	-12.92	53.59	1.69	Peak	324	264																																		
3	5727.73	62.42	68.20	-5.78	60.25	2.17	Peak	324	264																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement


Appendix D

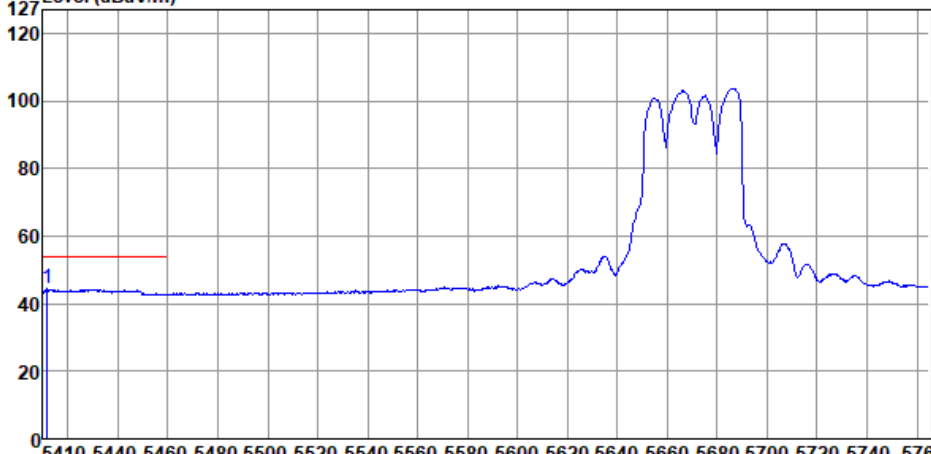Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5670						
Polarization	Vertical-Average								
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5411.78	44.44	54.00	-9.56	42.87	1.57	Average	324	264
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Band Edge measurement


Appendix D

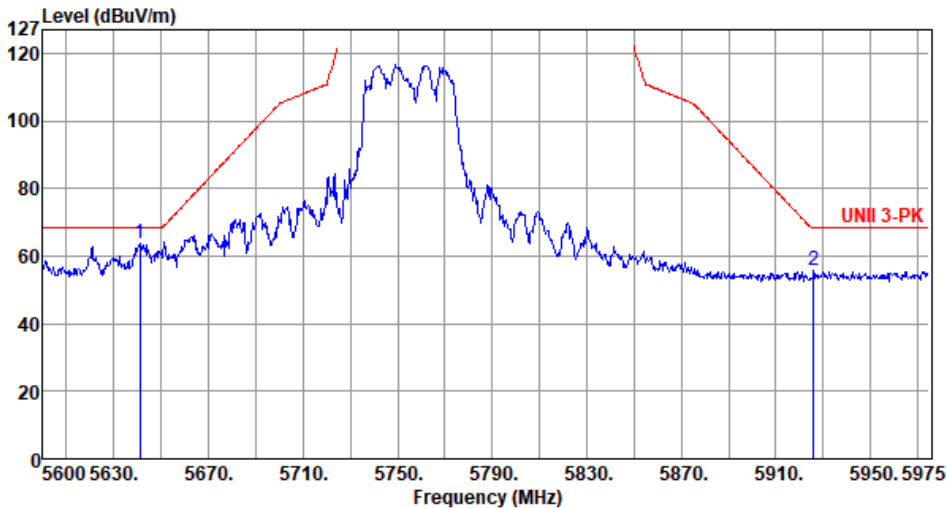Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5755																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5640.88</td><td>63.71</td><td>68.20</td><td>-4.49</td><td>61.83</td><td>1.88</td><td>Peak</td><td>237</td><td>131</td></tr><tr><td>2</td><td>5925.88</td><td>55.96</td><td>68.20</td><td>-12.24</td><td>53.14</td><td>2.82</td><td>Peak</td><td>237</td><td>131</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5640.88	63.71	68.20	-4.49	61.83	1.88	Peak	237	131	2	5925.88	55.96	68.20	-12.24	53.14	2.82	Peak	237	131
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5640.88	63.71	68.20	-4.49	61.83	1.88	Peak	237	131																								
2	5925.88	55.96	68.20	-12.24	53.14	2.82	Peak	237	131																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

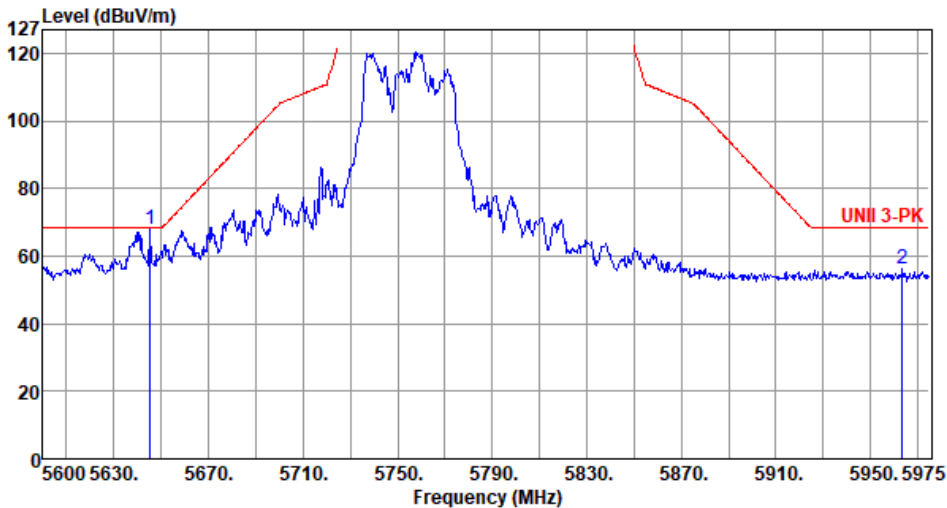Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5755																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5645.38</td><td>67.94</td><td>68.20</td><td>-0.26</td><td>66.05</td><td>1.89</td><td>Peak</td><td>308</td><td>128</td></tr><tr><td>2</td><td>5963.38</td><td>56.10</td><td>68.20</td><td>-12.10</td><td>53.21</td><td>2.89</td><td>Peak</td><td>308</td><td>128</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5645.38	67.94	68.20	-0.26	66.05	1.89	Peak	308	128	2	5963.38	56.10	68.20	-12.10	53.21	2.89	Peak	308	128
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5645.38	67.94	68.20	-0.26	66.05	1.89	Peak	308	128																								
2	5963.38	56.10	68.20	-12.10	53.21	2.89	Peak	308	128																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement


Appendix D

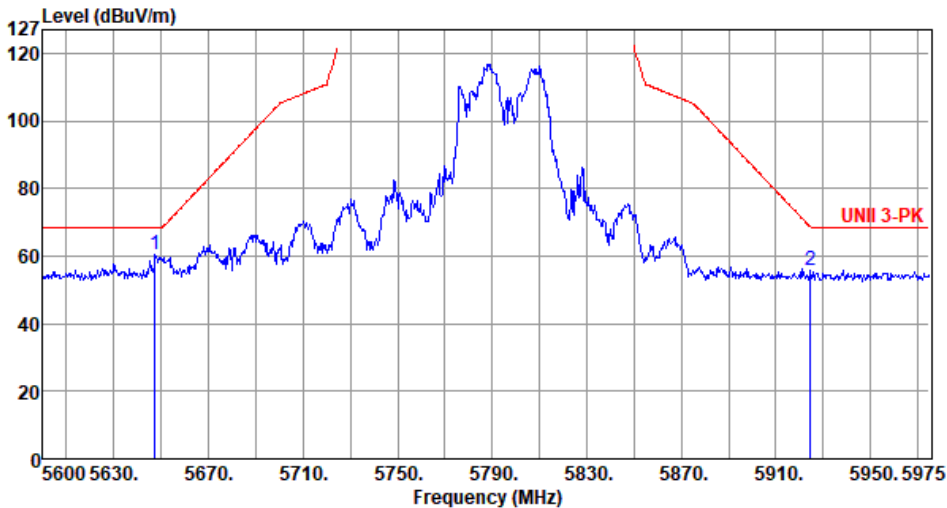Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5795																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5647.25</td><td>60.41</td><td>68.20</td><td>-7.79</td><td>58.52</td><td>1.89</td><td>Peak</td><td>305</td><td>52</td></tr><tr><td>2</td><td>5924.75</td><td>55.91</td><td>68.38</td><td>-12.47</td><td>53.09</td><td>2.82</td><td>Peak</td><td>305</td><td>52</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5647.25	60.41	68.20	-7.79	58.52	1.89	Peak	305	52	2	5924.75	55.91	68.38	-12.47	53.09	2.82	Peak	305	52
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5647.25	60.41	68.20	-7.79	58.52	1.89	Peak	305	52																								
2	5924.75	55.91	68.38	-12.47	53.09	2.82	Peak	305	52																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

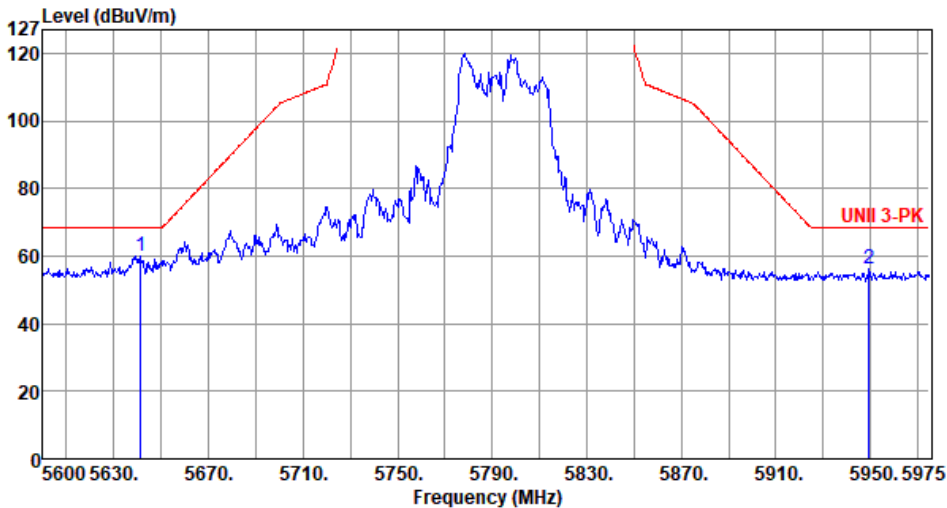Modulation	be EHT40_OFDMA	Test Freq. (MHz)	5795																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5641.25</td><td>60.22</td><td>68.20</td><td>-7.98</td><td>58.33</td><td>1.89</td><td>Peak</td><td>307</td><td>132</td></tr><tr><td>2</td><td>5949.50</td><td>56.15</td><td>68.20</td><td>-12.05</td><td>53.31</td><td>2.84</td><td>Peak</td><td>307</td><td>132</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5641.25	60.22	68.20	-7.98	58.33	1.89	Peak	307	132	2	5949.50	56.15	68.20	-12.05	53.31	2.84	Peak	307	132
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5641.25	60.22	68.20	-7.98	58.33	1.89	Peak	307	132																								
2	5949.50	56.15	68.20	-12.05	53.31	2.84	Peak	307	132																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement


Appendix D

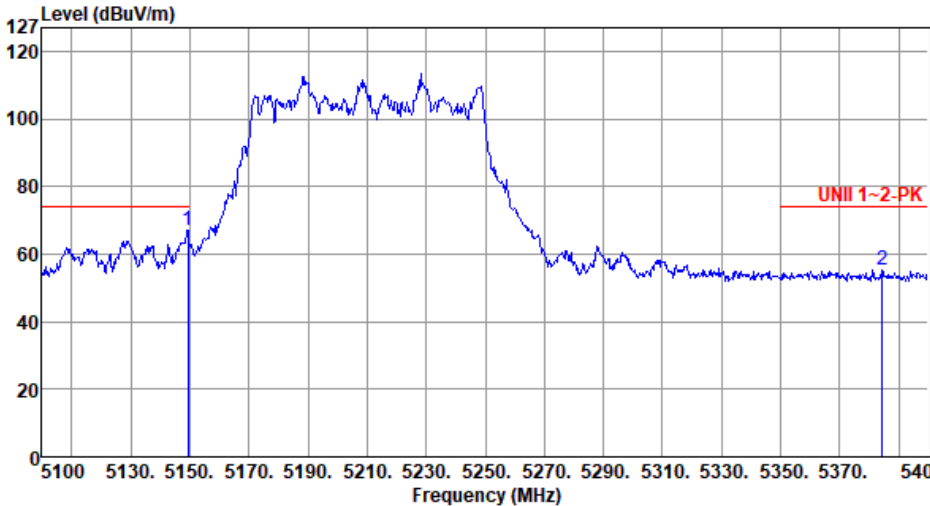Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5210																																																		
Polarization	Horizontal-Peak																																																				
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.50</td><td>67.03</td><td>74.00</td><td>-6.97</td><td>65.03</td><td>2.00</td><td>Peak</td><td>241</td><td>184</td></tr><tr><td>2</td><td>5384.40</td><td>55.21</td><td>74.00</td><td>-18.79</td><td>53.71</td><td>1.50</td><td>Peak</td><td>241</td><td>184</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5149.50	67.03	74.00	-6.97	65.03	2.00	Peak	241	184	2	5384.40	55.21	74.00	-18.79	53.71	1.50	Peak	241	184
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5149.50	67.03	74.00	-6.97	65.03	2.00	Peak	241	184																																												
2	5384.40	55.21	74.00	-18.79	53.71	1.50	Peak	241	184																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement


Appendix D

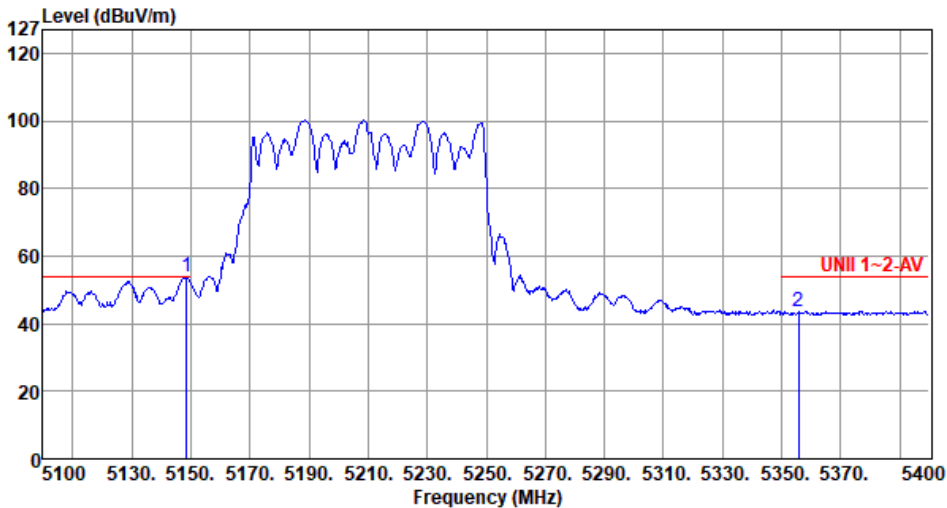Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5210																														
Polarization	Horizontal- Average																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.60</td><td>53.88</td><td>54.00</td><td>-0.12</td><td>51.88</td><td>2.00</td><td>Average</td><td>241</td><td>284</td></tr><tr><td>2</td><td>5355.60</td><td>43.77</td><td>54.00</td><td>-10.23</td><td>42.34</td><td>1.43</td><td>Average</td><td>241</td><td>284</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.60	53.88	54.00	-0.12	51.88	2.00	Average	241	284	2	5355.60	43.77	54.00	-10.23	42.34	1.43	Average	241	284
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.60	53.88	54.00	-0.12	51.88	2.00	Average	241	284																								
2	5355.60	43.77	54.00	-10.23	42.34	1.43	Average	241	284																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

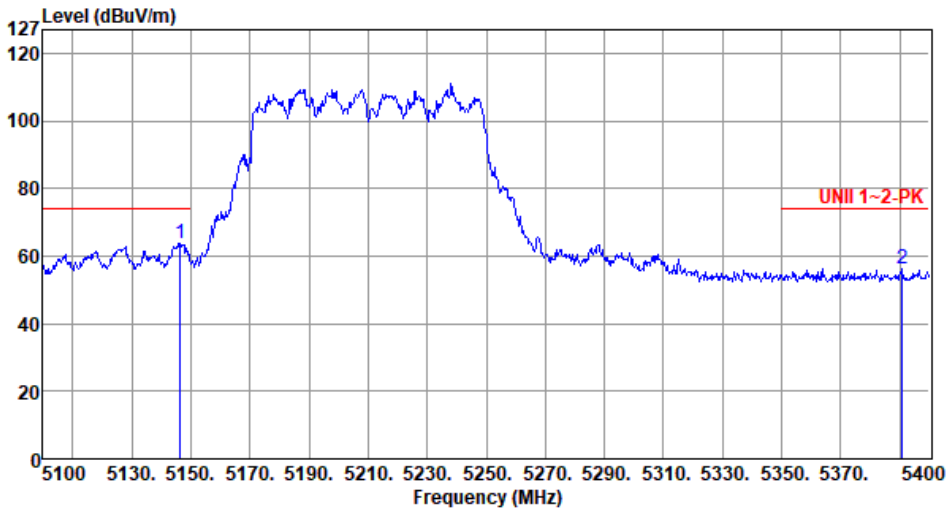Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5210																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5146.50</td><td>63.80</td><td>74.00</td><td>-10.20</td><td>61.81</td><td>1.99</td><td>Peak</td><td>323</td><td>258</td></tr><tr><td>2</td><td>5390.70</td><td>56.12</td><td>74.00</td><td>-17.88</td><td>54.60</td><td>1.52</td><td>Peak</td><td>323</td><td>258</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5146.50	63.80	74.00	-10.20	61.81	1.99	Peak	323	258	2	5390.70	56.12	74.00	-17.88	54.60	1.52	Peak	323	258
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5146.50	63.80	74.00	-10.20	61.81	1.99	Peak	323	258																								
2	5390.70	56.12	74.00	-17.88	54.60	1.52	Peak	323	258																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

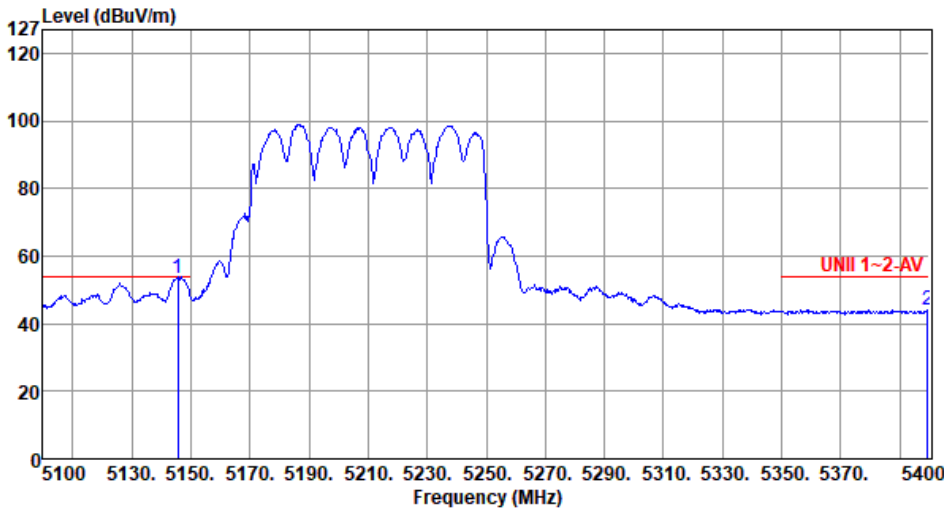Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5210																														
Polarization	Vertical-Average																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5145.60</td><td>53.41</td><td>54.00</td><td>-0.59</td><td>51.42</td><td>1.99</td><td>Average</td><td>323</td><td>258</td></tr><tr><td>2</td><td>5399.40</td><td>44.11</td><td>54.00</td><td>-9.89</td><td>42.56</td><td>1.55</td><td>Average</td><td>323</td><td>258</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5145.60	53.41	54.00	-0.59	51.42	1.99	Average	323	258	2	5399.40	44.11	54.00	-9.89	42.56	1.55	Average	323	258
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5145.60	53.41	54.00	-0.59	51.42	1.99	Average	323	258																								
2	5399.40	44.11	54.00	-9.89	42.56	1.55	Average	323	258																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

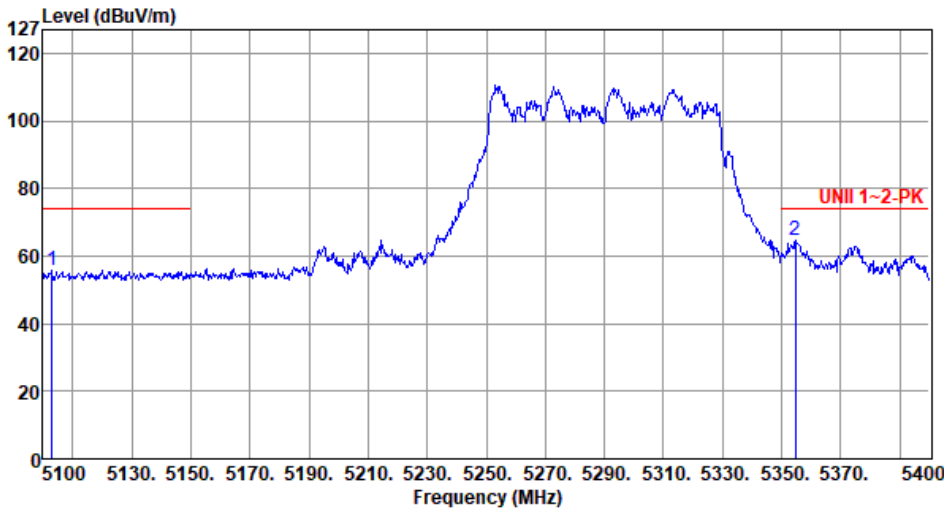Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5290																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5103.00</td><td>55.72</td><td>74.00</td><td>-18.28</td><td>53.82</td><td>1.90</td><td>Peak</td><td>240</td><td>214</td></tr><tr><td>2</td><td>5354.70</td><td>64.61</td><td>74.00</td><td>-9.39</td><td>63.19</td><td>1.42</td><td>Peak</td><td>240</td><td>214</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5103.00	55.72	74.00	-18.28	53.82	1.90	Peak	240	214	2	5354.70	64.61	74.00	-9.39	63.19	1.42	Peak	240	214
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	5103.00	55.72	74.00	-18.28	53.82	1.90	Peak	240	214																																		
2	5354.70	64.61	74.00	-9.39	63.19	1.42	Peak	240	214																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement


Appendix D

Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5290
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) <			



Band Edge measurement


Appendix D

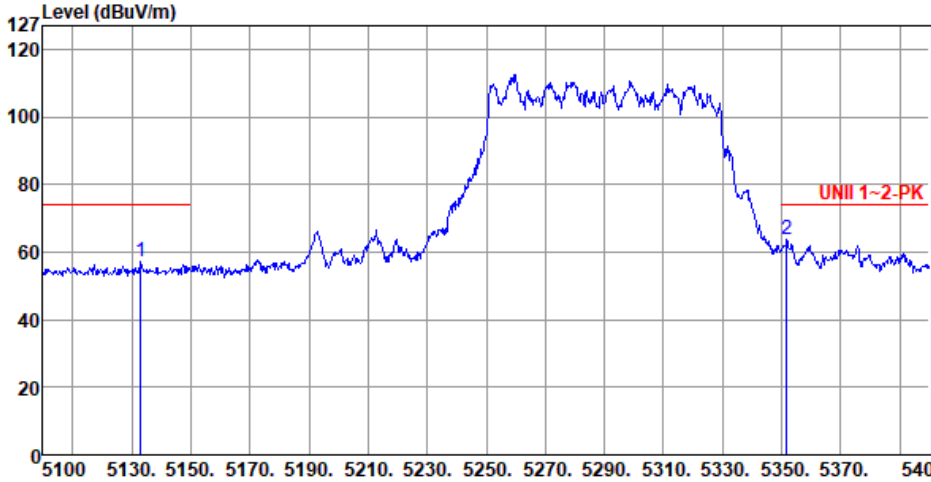Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5290																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5133.00</td><td>57.31</td><td>74.00</td><td>-16.69</td><td>55.35</td><td>1.96</td><td>Peak</td><td>123</td><td>250</td></tr><tr><td>2</td><td>5351.70</td><td>63.54</td><td>74.00</td><td>-10.46</td><td>62.13</td><td>1.41</td><td>Peak</td><td>123</td><td>250</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5133.00	57.31	74.00	-16.69	55.35	1.96	Peak	123	250	2	5351.70	63.54	74.00	-10.46	62.13	1.41	Peak	123	250
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5133.00	57.31	74.00	-16.69	55.35	1.96	Peak	123	250																								
2	5351.70	63.54	74.00	-10.46	62.13	1.41	Peak	123	250																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

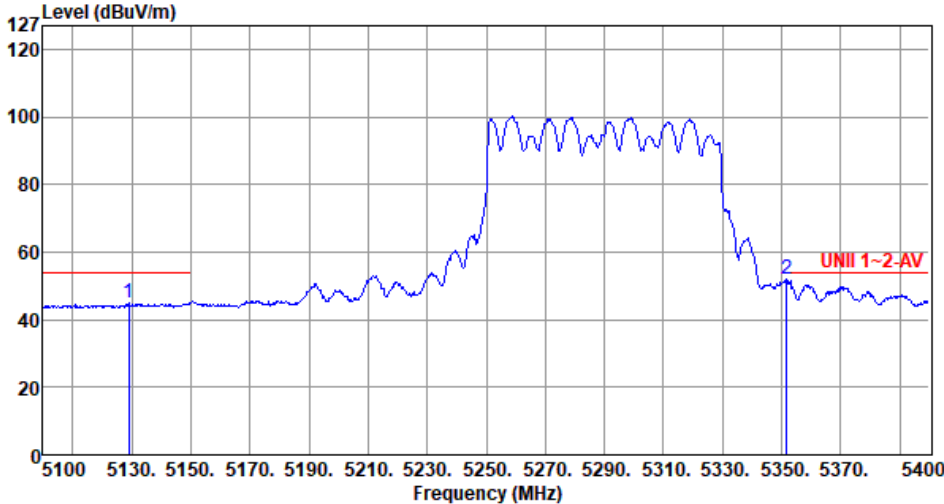Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5290																														
Polarization	Vertical-Average																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5129.10</td><td>44.84</td><td>54.00</td><td>-9.16</td><td>42.89</td><td>1.95</td><td>Average</td><td>123</td><td>250</td></tr><tr><td>2</td><td>5351.70</td><td>51.81</td><td>54.00</td><td>-2.19</td><td>50.40</td><td>1.41</td><td>Average</td><td>123</td><td>250</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5129.10	44.84	54.00	-9.16	42.89	1.95	Average	123	250	2	5351.70	51.81	54.00	-2.19	50.40	1.41	Average	123	250
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5129.10	44.84	54.00	-9.16	42.89	1.95	Average	123	250																								
2	5351.70	51.81	54.00	-2.19	50.40	1.41	Average	123	250																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement


Appendix D

Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5530																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5433.08</td><td>64.78</td><td>74.00</td><td>-9.22</td><td>63.15</td><td>1.63</td><td>Peak</td><td>235</td><td>222</td></tr><tr><td>2</td><td>5470.00</td><td>63.23</td><td>68.20</td><td>-4.97</td><td>61.51</td><td>1.72</td><td>Peak</td><td>235</td><td>222</td></tr><tr><td>3</td><td>5747.96</td><td>56.36</td><td>68.20</td><td>-11.84</td><td>54.09</td><td>2.27</td><td>Peak</td><td>235</td><td>222</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5433.08	64.78	74.00	-9.22	63.15	1.63	Peak	235	222	2	5470.00	63.23	68.20	-4.97	61.51	1.72	Peak	235	222	3	5747.96	56.36	68.20	-11.84	54.09	2.27	Peak	235	222
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5433.08	64.78	74.00	-9.22	63.15	1.63	Peak	235	222																																		
2	5470.00	63.23	68.20	-4.97	61.51	1.72	Peak	235	222																																		
3	5747.96	56.36	68.20	-11.84	54.09	2.27	Peak	235	222																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

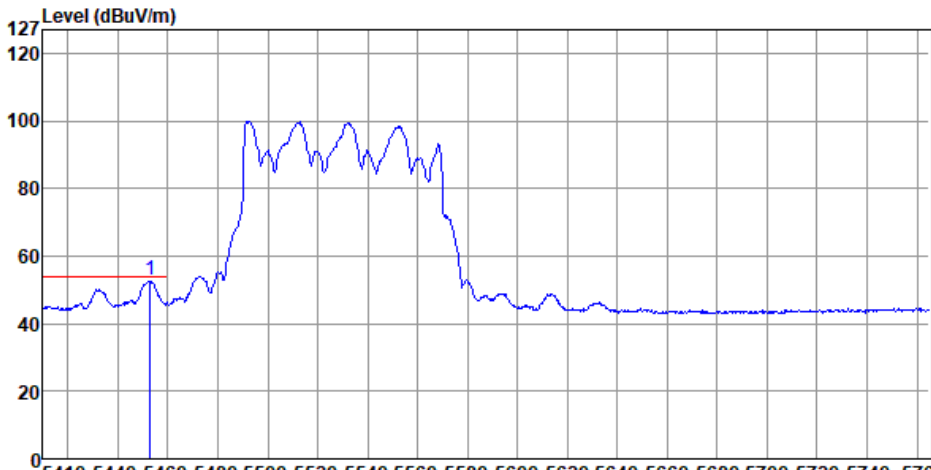Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5530																				
Polarization	Horizontal-Average																						
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																							
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5452.96</td><td>52.86</td><td>54.00</td><td>-1.14</td><td>51.19</td><td>1.67</td><td>Average</td><td>235</td><td>222</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5452.96	52.86	54.00	-1.14	51.19	1.67	Average	235	222
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5452.96	52.86	54.00	-1.14	51.19	1.67	Average	235	222														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement


Appendix D

Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5530																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m) 127 120 100 80 60 40 20 0 5410 5440.5460.5480.5500.5520.5540.5560.5580.5600.5620.5640.5660.5680.5700.5720.5740. 5765 Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5458.64</td><td>65.72</td><td>74.00</td><td>-8.28</td><td>64.03</td><td>1.69</td><td>Peak</td><td>316</td><td>286</td></tr><tr><td>2</td><td>5460.10</td><td>65.49</td><td>68.20</td><td>-2.71</td><td>63.80</td><td>1.69</td><td>Peak</td><td>316</td><td>286</td></tr><tr><td>3</td><td>5754.00</td><td>56.00</td><td>68.20</td><td>-12.20</td><td>53.71</td><td>2.29</td><td>Peak</td><td>316</td><td>286</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5458.64	65.72	74.00	-8.28	64.03	1.69	Peak	316	286	2	5460.10	65.49	68.20	-2.71	63.80	1.69	Peak	316	286	3	5754.00	56.00	68.20	-12.20	53.71	2.29	Peak	316	286
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5458.64	65.72	74.00	-8.28	64.03	1.69	Peak	316	286																																		
2	5460.10	65.49	68.20	-2.71	63.80	1.69	Peak	316	286																																		
3	5754.00	56.00	68.20	-12.20	53.71	2.29	Peak	316	286																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement


Appendix D

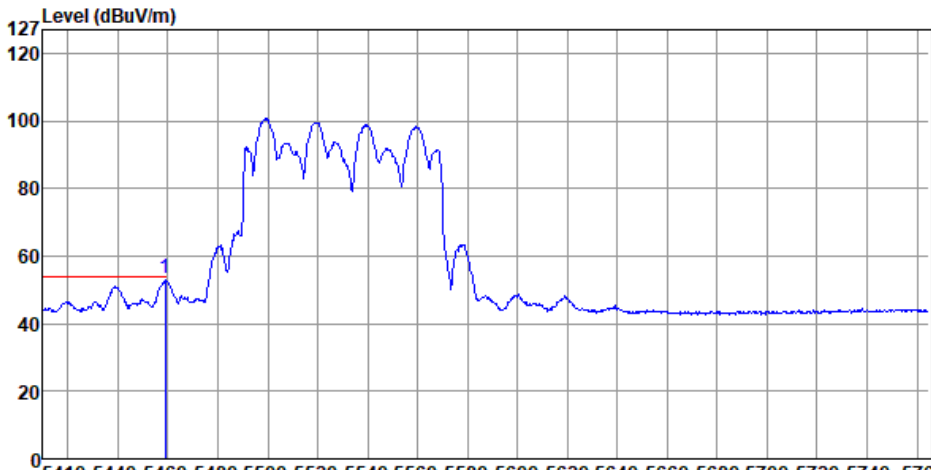Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5530																				
Polarization	Vertical-Average																						
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																							
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5458.99</td><td>53.30</td><td>54.00</td><td>-0.70</td><td>51.61</td><td>1.69</td><td>Average</td><td>316</td><td>286</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5458.99	53.30	54.00	-0.70	51.61	1.69	Average	316	286
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5458.99	53.30	54.00	-0.70	51.61	1.69	Average	316	286														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

Appendix D

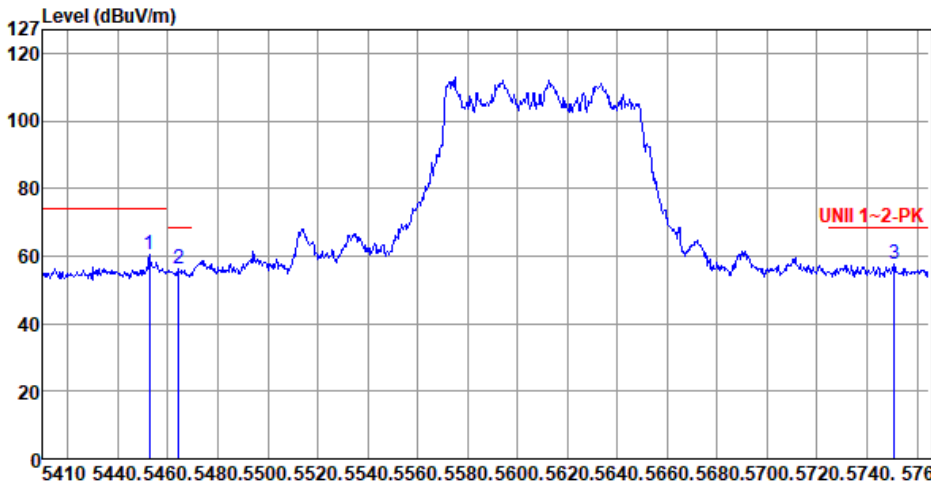Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5610																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5452.60</td><td>60.22</td><td>74.00</td><td>-13.78</td><td>58.55</td><td>1.67</td><td>Peak</td><td>314</td><td>206</td></tr><tr><td>2</td><td>5464.32</td><td>56.37</td><td>68.20</td><td>-11.83</td><td>54.67</td><td>1.70</td><td>Peak</td><td>314</td><td>206</td></tr><tr><td>3</td><td>5750.80</td><td>57.84</td><td>68.20</td><td>-10.36</td><td>55.57</td><td>2.27</td><td>Peak</td><td>314</td><td>206</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5452.60	60.22	74.00	-13.78	58.55	1.67	Peak	314	206	2	5464.32	56.37	68.20	-11.83	54.67	1.70	Peak	314	206	3	5750.80	57.84	68.20	-10.36	55.57	2.27	Peak	314	206
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5452.60	60.22	74.00	-13.78	58.55	1.67	Peak	314	206																																		
2	5464.32	56.37	68.20	-11.83	54.67	1.70	Peak	314	206																																		
3	5750.80	57.84	68.20	-10.36	55.57	2.27	Peak	314	206																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5610
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64			
Level (dBUV/m)			



Band Edge measurement


Appendix D

Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5610																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m) UNII 1~2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5459.35</td><td>60.21</td><td>74.00</td><td>-13.79</td><td>58.52</td><td>1.69</td><td>Peak</td><td>234</td><td>242</td></tr><tr><td>2</td><td>5461.12</td><td>57.98</td><td>68.20</td><td>-10.22</td><td>56.29</td><td>1.69</td><td>Peak</td><td>234</td><td>242</td></tr><tr><td>3</td><td>5738.02</td><td>57.49</td><td>68.20</td><td>-10.71</td><td>55.27</td><td>2.22</td><td>Peak</td><td>234</td><td>242</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.35	60.21	74.00	-13.79	58.52	1.69	Peak	234	242	2	5461.12	57.98	68.20	-10.22	56.29	1.69	Peak	234	242	3	5738.02	57.49	68.20	-10.71	55.27	2.22	Peak	234	242
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5459.35	60.21	74.00	-13.79	58.52	1.69	Peak	234	242																																		
2	5461.12	57.98	68.20	-10.22	56.29	1.69	Peak	234	242																																		
3	5738.02	57.49	68.20	-10.71	55.27	2.22	Peak	234	242																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement


Appendix D

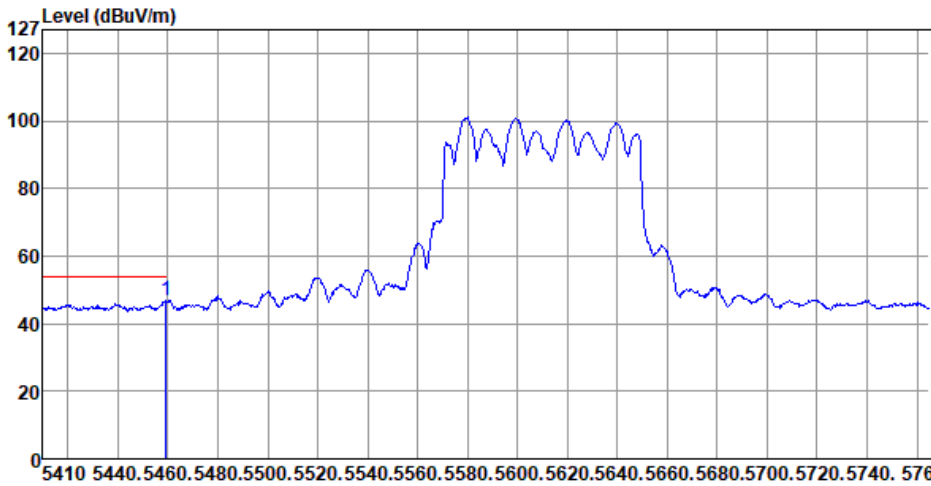Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5610																				
Polarization	Vertical-Average																						
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5459.35</td><td>46.75</td><td>54.00</td><td>-7.25</td><td>45.06</td><td>1.69</td><td>Average</td><td>234</td><td>242</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.35	46.75	54.00	-7.25	45.06	1.69	Average	234	242
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5459.35	46.75	54.00	-7.25	45.06	1.69	Average	234	242														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement


Appendix D

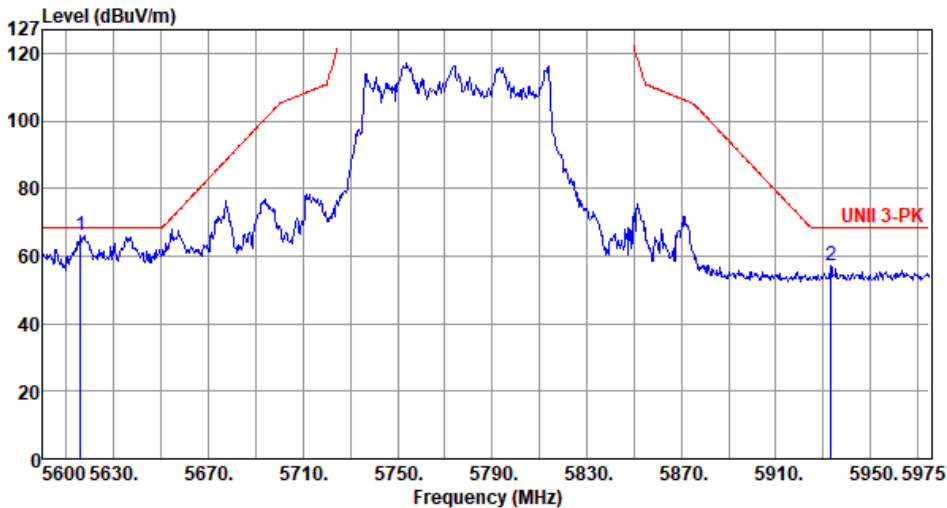Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5775																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5615.75</td><td>66.13</td><td>68.20</td><td>-2.07</td><td>64.27</td><td>1.86</td><td>Peak</td><td>163</td><td>217</td></tr><tr><td>2</td><td>5933.38</td><td>57.10</td><td>68.20</td><td>-11.10</td><td>54.27</td><td>2.83</td><td>Peak</td><td>163</td><td>217</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5615.75	66.13	68.20	-2.07	64.27	1.86	Peak	163	217	2	5933.38	57.10	68.20	-11.10	54.27	2.83	Peak	163	217
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5615.75	66.13	68.20	-2.07	64.27	1.86	Peak	163	217																								
2	5933.38	57.10	68.20	-11.10	54.27	2.83	Peak	163	217																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

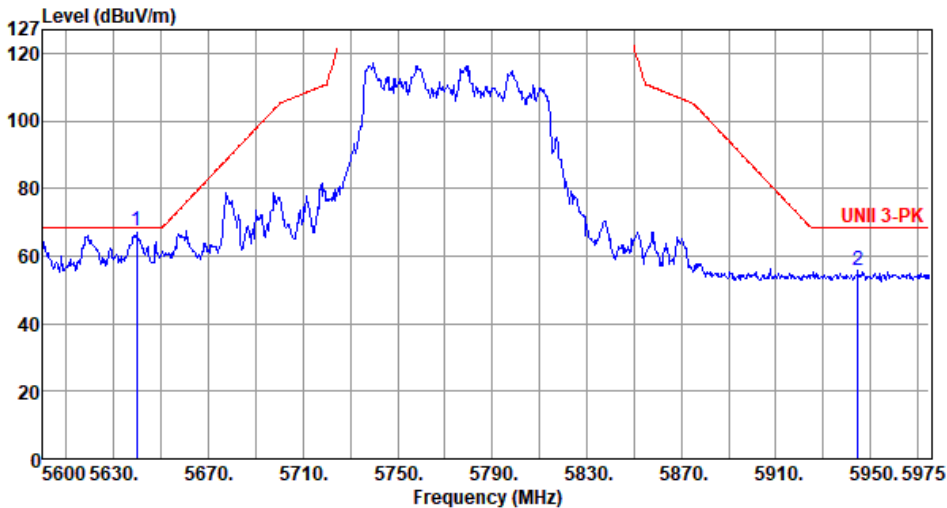Modulation	be EHT80_OFDMA	Test Freq. (MHz)	5775																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5639.75</td><td>67.29</td><td>68.20</td><td>-0.91</td><td>65.41</td><td>1.88</td><td>Peak</td><td>304</td><td>128</td></tr><tr><td>2</td><td>5944.63</td><td>55.58</td><td>68.20</td><td>-12.62</td><td>52.74</td><td>2.84</td><td>Peak</td><td>304</td><td>128</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5639.75	67.29	68.20	-0.91	65.41	1.88	Peak	304	128	2	5944.63	55.58	68.20	-12.62	52.74	2.84	Peak	304	128
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5639.75	67.29	68.20	-0.91	65.41	1.88	Peak	304	128																								
2	5944.63	55.58	68.20	-12.62	52.74	2.84	Peak	304	128																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement


Appendix D

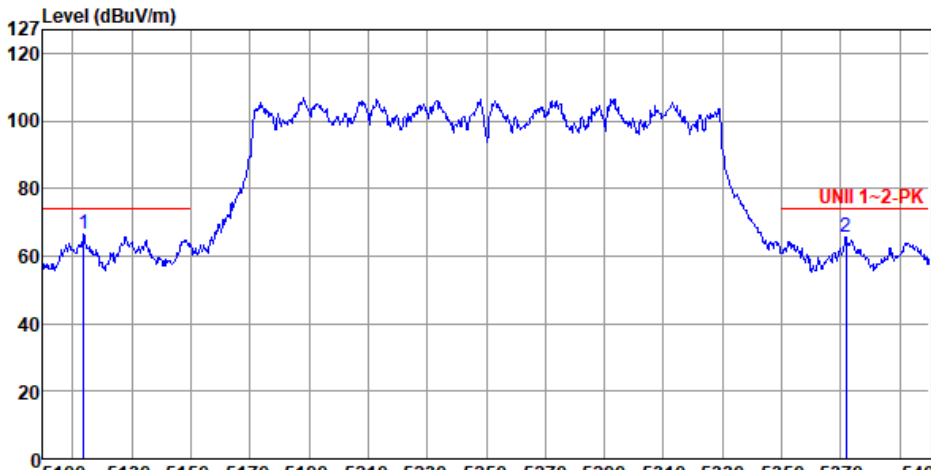Modulation	be EHT160_OFDMA	Test Freq. (MHz)	5250																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5113.80</td><td>66.50</td><td>74.00</td><td>-7.50</td><td>64.57</td><td>1.93</td><td>Peak</td><td>301</td><td>182</td></tr><tr><td>2</td><td>5371.80</td><td>65.79</td><td>74.00</td><td>-8.21</td><td>64.32</td><td>1.47</td><td>Peak</td><td>250</td><td>219</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5113.80	66.50	74.00	-7.50	64.57	1.93	Peak	301	182	2	5371.80	65.79	74.00	-8.21	64.32	1.47	Peak	250	219
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5113.80	66.50	74.00	-7.50	64.57	1.93	Peak	301	182																								
2	5371.80	65.79	74.00	-8.21	64.32	1.47	Peak	250	219																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement


Appendix D

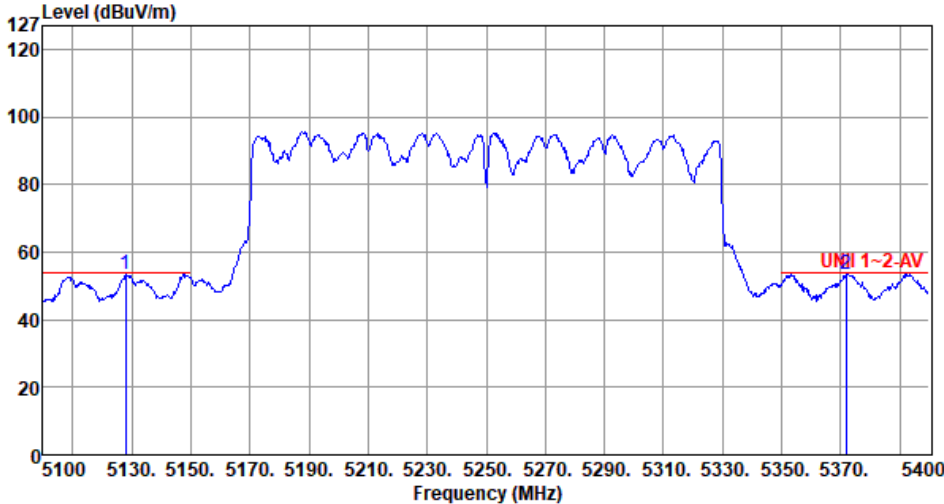Modulation	be EHT160_OFDMA	Test Freq. (MHz)	5250																														
Polarization	Horizontal-Average																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5127.90</td><td>53.30</td><td>54.00</td><td>-0.70</td><td>51.35</td><td>1.95</td><td>Average</td><td>301</td><td>182</td></tr><tr><td>2</td><td>5371.80</td><td>53.65</td><td>54.00</td><td>-0.35</td><td>52.18</td><td>1.47</td><td>Average</td><td>250</td><td>219</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5127.90	53.30	54.00	-0.70	51.35	1.95	Average	301	182	2	5371.80	53.65	54.00	-0.35	52.18	1.47	Average	250	219
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5127.90	53.30	54.00	-0.70	51.35	1.95	Average	301	182																								
2	5371.80	53.65	54.00	-0.35	52.18	1.47	Average	250	219																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement


Appendix D

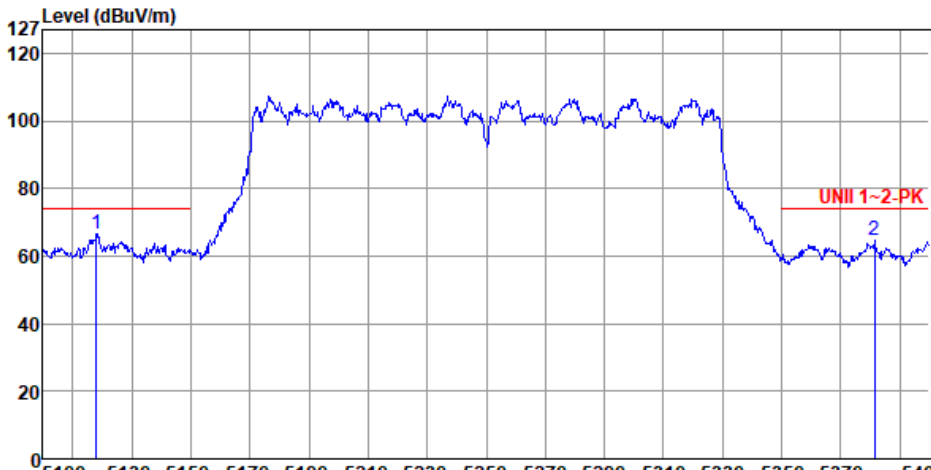Modulation	be EHT160_OFDMA	Test Freq. (MHz)	5250																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5118.00</td><td>66.50</td><td>74.00</td><td>-7.50</td><td>64.56</td><td>1.94</td><td>Peak</td><td>241</td><td>261</td></tr><tr><td>2</td><td>5381.40</td><td>64.52</td><td>74.00</td><td>-9.48</td><td>63.03</td><td>1.49</td><td>Peak</td><td>312</td><td>245</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5118.00	66.50	74.00	-7.50	64.56	1.94	Peak	241	261	2	5381.40	64.52	74.00	-9.48	63.03	1.49	Peak	312	245
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5118.00	66.50	74.00	-7.50	64.56	1.94	Peak	241	261																								
2	5381.40	64.52	74.00	-9.48	63.03	1.49	Peak	312	245																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement


Appendix D

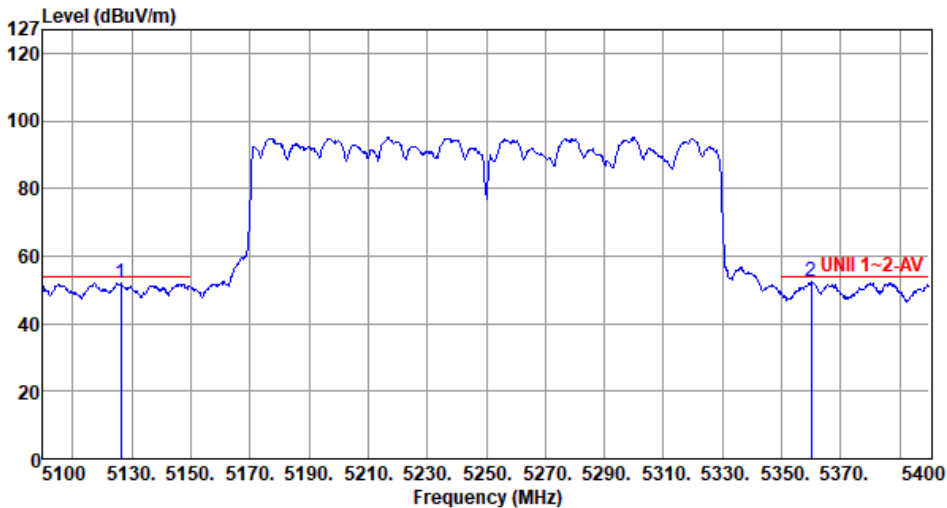Modulation	be EHT160_OFDMA	Test Freq. (MHz)	5250																														
Polarization	Vertical-Average																																
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5126.40</td><td>51.90</td><td>54.00</td><td>-2.10</td><td>49.96</td><td>1.94</td><td>Average</td><td>241</td><td>261</td></tr><tr><td>2</td><td>5360.10</td><td>52.38</td><td>54.00</td><td>-1.62</td><td>50.94</td><td>1.44</td><td>Average</td><td>312</td><td>245</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5126.40	51.90	54.00	-2.10	49.96	1.94	Average	241	261	2	5360.10	52.38	54.00	-1.62	50.94	1.44	Average	312	245
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5126.40	51.90	54.00	-2.10	49.96	1.94	Average	241	261																								
2	5360.10	52.38	54.00	-1.62	50.94	1.44	Average	312	245																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

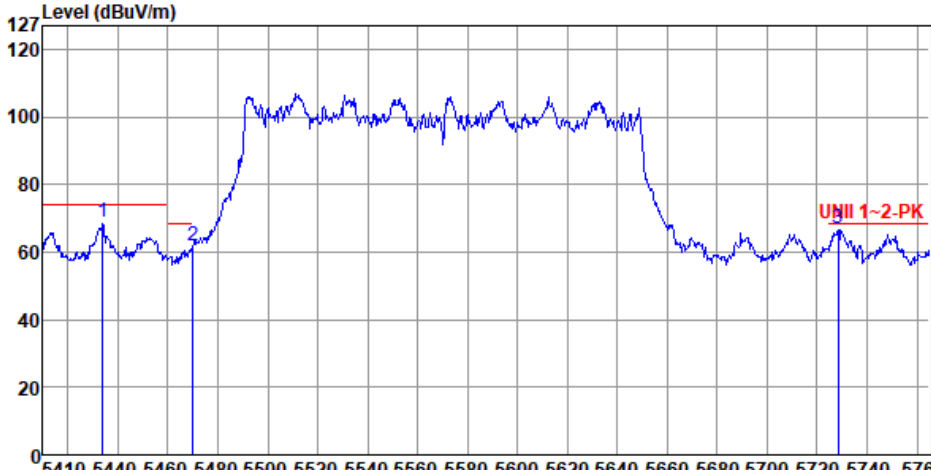Modulation	be EHT160_OFDMA	Test Freq. (MHz)	5570																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5433.79</td><td>68.88</td><td>74.00</td><td>-5.12</td><td>67.25</td><td>1.63</td><td>Peak</td><td>235</td><td>222</td></tr><tr><td>2</td><td>5470.00</td><td>61.87</td><td>68.20</td><td>-6.33</td><td>60.15</td><td>1.72</td><td>Peak</td><td>235</td><td>222</td></tr><tr><td>3</td><td>5728.44</td><td>66.94</td><td>68.20</td><td>-1.26</td><td>64.77</td><td>2.17</td><td>Peak</td><td>135</td><td>221</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5433.79	68.88	74.00	-5.12	67.25	1.63	Peak	235	222	2	5470.00	61.87	68.20	-6.33	60.15	1.72	Peak	235	222	3	5728.44	66.94	68.20	-1.26	64.77	2.17	Peak	135	221
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5433.79	68.88	74.00	-5.12	67.25	1.63	Peak	235	222																																		
2	5470.00	61.87	68.20	-6.33	60.15	1.72	Peak	235	222																																		
3	5728.44	66.94	68.20	-1.26	64.77	2.17	Peak	135	221																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT160_OFDMA	Test Freq. (MHz)	5570																				
Polarization	Horizontal-Average																						
Test By :Akun Chung- Temperature(°C):24 Humidity(%):64																							
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5432.37</td><td>53.76</td><td>54.00</td><td>-0.24</td><td>52.14</td><td>1.62</td><td>Average</td><td>235</td><td>222</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5432.37	53.76	54.00	-0.24	52.14	1.62	Average	235	222
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5432.37	53.76	54.00	-0.24	52.14	1.62	Average	235	222														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							