

SAR TEST REPORT

Applicant IDEMIA PUBLIC SECURITY France
FCC ID ZBW-MPHMB005A
Product ID Screen V2
Brand IDEMIA
Model MPH-MB005A
Report No. EFTA26020037-IE-03-S1V1
Issue Date June 12, 2026

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **IEEE 1528- 2013, ANSI C95.1: 1992 and IEEE C95.1: 1992**. The test results show that the equipment tested can demonstrate compliance with the requirements as documented in this report.



Prepared by: Wei Fangying



Approved by: Xu Kai

Eurofins TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

Note: This revised report (Report No.: EFTA26020037-IE-03-S1V1) supersedes and replaces the previously issued report (Report No.: EFTA26020037-IE-03-S1). Please discard or destroy the previously issued report and dispose of it accordingly.

Table of Contents

1	Test Laboratory	5
1.1	Notes of the Test Report.....	5
1.2	Test facility	5
1.3	Testing Location.....	5
1.4	Laboratory Environment	6
2	Statement of Compliance.....	7
3	Description of Equipment under Test.....	9
4	Test Specification, Methods and Procedures	11
5	Operational Conditions during Test.....	12
5.1	Test Positions	12
5.2	Measurement Variability	14
5.3	Test Configuration	15
5.3.1	GSM Test Configuration	15
5.3.2	WCDMA Test Configuration	15
5.3.3	LTE Test Configuration	19
5.3.4	TDD LTE specification.....	21
5.3.5	Wi-Fi Test Configuration	24
5.3.6	Bluetooth Test Configuration	25
5.2.1	Proximity Sensor Power Reduction Description	25
6	SAR Measurements System Configuration	34
6.1	SAR Measurement Set-up.....	34
6.2	DASY5 E-field Probe System.....	35
6.3	SAR Measurement Procedure.....	36
7	Main Test Equipment.....	38
8	Tissue Dielectric Parameter Measurements & System Check.....	39
8.1	Tissue Verification	39
8.2	System Check.....	41
8.3	SAR System Validation.....	44
9	Normal and Maximum Output Power.....	45
9.1	GSM Mode.....	45
9.2	WCDMA Mode	47
9.3	LTE Mode	49
9.4	WLAN Mode.....	106
9.5	Bluetooth Mode.....	114
9.6	NFC Mode.....	115
10	Measured and Reported (Scaled) SAR Results	116
10.1	EUT Antenna Locations	116
10.2	Measured SAR Results.....	117
10.3	Simultaneous Transmission Analysis	124
11	Measurement Uncertainty.....	126
	ANNEX A: Test Layout	127

ANNEX B: System Check Results	129
ANNEX C: Highest Graph Results	138
ANNEX D: Probe Calibration Certificate	152
ANNEX E: D750V3 Dipole Calibration Certificate	174
ANNEX F: D835V2 Dipole Calibration Certificate	180
ANNEX G: D1750V2 Dipole Calibration Certificate	186
ANNEX H: D1900V2 Dipole Calibration Certificate	192
ANNEX I: D2450V2 Dipole Calibration Certificate	198
ANNEX J: D2600V2 Dipole Calibration Certificate	204
ANNEX K: D5GHzV2 Dipole Calibration Certificate	210
ANNEX Q: DAE4 Calibration Certificate (SN: 1317)	219
ANNEX R: ANNEX B: The EUT Appearance	222
ANNEX S: Test Setup Photos	223

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3 Testing Location

Company: Eurofins TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <https://www.eurofins.com/electrical-and-electronics>
E-mail: Kain.Xu@cpt.eurofinscn.com

1.4 Laboratory Environment

Temperature	Min. = 18°C, Max. = 25°C
Relative humidity	Min. = 20%, Max. = 80%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

2 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for the EUT are as follows:

Table 1: Highest Reported SAR

Mode	Highest Reported SAR (W/kg)
	1g Body SAR (Separation 0mm)
GSM 850	0.93
GSM 1900	0.93
WCDMA Band II	0.81
WCDMA Band V	0.71
LTE FDD 2	0.86
LTE FDD 7	0.94
LTE FDD 12 (LTE FDD 17)	0.87
LTE FDD 13	0.93
LTE FDD 26 (LTE FDD 5)	0.94
LTE TDD 41 (LTE TDD 38)	0.59
LTE FDD 66 (LTE FDD 4)	0.78
Wi-Fi (2.4G)	0.46
Wi-Fi (5G)	0.52
Bluetooth	0.12

Date of Testing: March 17, 2026 ~May 23, 2026

Date of Sample Received: February 3, 2026

Note: 1. The device is in compliance with SAR for Uncontrolled Environment /General Population exposure limits (1.6 W/kg and 4.0 W/kg) specified in ANSI C95.1: 1992/IEEE C95.1: 1991, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.

2. All indications of Pass/Fail in this report are opinions expressed by Eurofins TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.

Note:

- 1) The highest Reported SAR for body SAR and simultaneous transmission exposure conditions are 0.94W/kg and 1.59 W/kg.

3) According to TCB workshop October, 2014 RF Exposure Procedures Update (Overlapping LTE Bands):

a) WWAN Antenna SAR for LTE Band 17 (Frequency range: 704 ~ 716 MHz) is covered by LTE Band 12 (Frequency range 699 ~ 716 MHz); LTE Band 5 (Frequency range: 824 ~ 849 MHz) is covered by LTE Band 26 (Frequency range 814 ~ 849 MHz); LTE Band 4 (Frequency range: 1710 ~ 1755 MHz) is covered by LTE Band 66 (Frequency range 1710 ~ 1780 MHz) due to similar frequency range, same maximum tune up limit and same channel bandwidth.

The device is in compliance with Specific Absorption Rate (SAR) for general population/ uncontrolled exposure limits according to the FCC rule § 2.1093, the ANSI C95.1: 1992 and IEEE C95.1: 1991, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013.

Table 2: Highest Simultaneous Transmission SAR

Exposure Configuration	1g Body SAR (Separation 0mm)
Highest Simultaneous Transmission SAR (W/kg)	1.59
Note: 1. The detail for simultaneous transmission consideration is described in chapter 10.3.	

3 Description of Equipment under Test

Client Information

Applicant	IDEMIA PUBLIC SECURITY France
Applicant address	2 place Samuel de Champlain 92400 Courbevoie FRANCE
Manufacturer	IDEMIA PUBLIC SECURITY France
Manufacturer address	2 place Samuel de Champlain 92400 Courbevoie FRANCE

General Technologies

EUT Stage	Identical Prototype
Model:	MPH-MB005A
IMEI:	IMEI1: 355865520007649; IMEI2: 355865520007656 Configuration2: IMEI1: 355865520012144; IMEI2: 355865520012151
Hardware Version:	V01
Software Version:	IDEMIA_WM28P_V01_260122
Antenna Type:	Internal Antenna
Power Class:	GSM 850:4 GSM 1900:1 WCDMA Band II/V:3 LTE FDD 2/4/5/7/12/13/17/26:3 LTE TDD 38/41:3
Power Level	GSM 850: level 5 GSM 1900: level 0 WCDMA Band II/V: all up bits LTE FDD 2/4/5/7/12/13/17/26:max power LTE TDD 38/41:max power
EUT Accessory	
Battery1	Manufacturer: Guangdong Fenghua New Energy Co., Ltd. Model: GF-LIP-100385A-N01
Adapter1	Manufacturer: Shenzhen Sorghum red Electronics Technology Co., Ltd. Model: GLH-PD20W-D
USB Cable 1	Manufacturer: Huizhou juwei electronics co. Ltd. Model: JWUB2095-M01H Length: 150cm
Note: The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant.	

Wireless Technology and Frequency Range

Wireless Technology		Modulation	Operating mode	Tx (MHz)	Rx (MHz)	
GSM	850	Voice(GMSK) GPRS(GMSK) EGPRS(GMSK,8PSK)	☐ Multi-slot Class:8-1UP ☐ Multi-slot Class:10-2UP ☒ Multi-slot Class:12-4UP ☐ Multi-slot Class:33-4UP	824 ~ 849	869 ~ 894	
	1900			1850 ~ 1910	1930 ~ 1990	
	Does this device support DTM (Dual Transfer Mode)? ☐ Yes ☒ No					
WCDMA	Band II	QPSK, 16QAM	HSDPA UE Category:14 HSUPA UE Category:7 DC-HSDPA UE Category:24 HSPA+ Category:24	1850 ~ 1910	1930 ~ 1990	
	Band V			824 ~ 849	869 ~ 894	
LTE	FDD 2	QPSK, 16QAM, 64QAM	Rel.11 /Category 4	1850 ~ 1910	1930 ~ 1990	
	FDD 4			1710 ~ 1755	2110 ~ 2155	
	FDD 5			824 ~ 849	869 ~ 894	
	FDD 7			2500 ~ 2570	2620 ~ 2690	
	FDD 12			699 ~ 716	729 ~ 746	
	FDD 13			777 ~ 787	746 ~ 756	
	FDD 17			704 ~ 716	734 ~ 746	
	FDD 26			814 ~ 849	859 ~ 894	
	TDD 38			2570 ~ 2620	2570 ~ 2620	
	TDD 41			2496 ~ 2690	2496 ~ 2690	
	FDD 66			1710 ~ 1780	2110 ~ 2180	
	Does this device support Carrier Aggregation (CA) ☐ Yes ☒ No					
	Does this device support SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No					
Bluetooth	2.4GHz	Version 5.4 BR/EDR + LE		2402 ~2480	2402 ~2480	
Wi-Fi	2.4GHz	DSSS, OFDM,OFDMA	802.11b/g/n HT20 ax HE20	2412 ~ 2462	2412 ~ 2462	
		OFDM,OFDMA	802.11n HT40 ax HE40	2422 ~ 2452	2422 ~ 2452	
	5GHz	OFDM,OFDMA	802.11a/n HT20/ HT40/ ac VHT20/ VHT40/ VHT80 ax HE20/ HE40/ HE80/HE160	5150 ~ 5250 5250 ~ 5350 5470 ~ 5725 5725 ~ 5850	5150 ~ 5250 5250 ~ 5350 5470 ~ 5725 5725 ~ 5850	
			Does this device support MIMO ☐ Yes ☒ No			
			NFC	13.56MHz		

4 Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE 1528- 2013, ANSI C95.1: 1992/IEEE C95.1: 1992, the following FCC Published RF exposure KDB procedures:

KDB 248227 D01 802.11 Wi-Fi SAR v02r02
KDB 447498 D01 General RF Exposure Guidance v06
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02 RF Exposure Reporting v01r02
KDB 941225 D01 3G SAR Procedures v03r01
KDB 941225 D05 SAR for LTE Devices v02r05
KDB 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
KDB 616217 D04 SAR for laptop and tablets v01r02

5 Operational Conditions during Test

5.1 Test Positions

According to KDB 616217 D04, SAR evaluation is required for back surface and edges of the devices. The back surface and edges of the tablet are tested with the tablet touching the phantom. Exposures from antennas through the front surface of the display section of a tablet are generally limited to the user's hands. Exposures to hands for typical consumer transmitters used in tablets are not expected to exceed the extremity SAR limit; therefore, SAR evaluation for the front surface of tablet display screens are generally not necessary. When voice mode is supported on a tablet and it is limited to speaker mode or headset operations only, additional SAR testing for this type of voice use is not required.

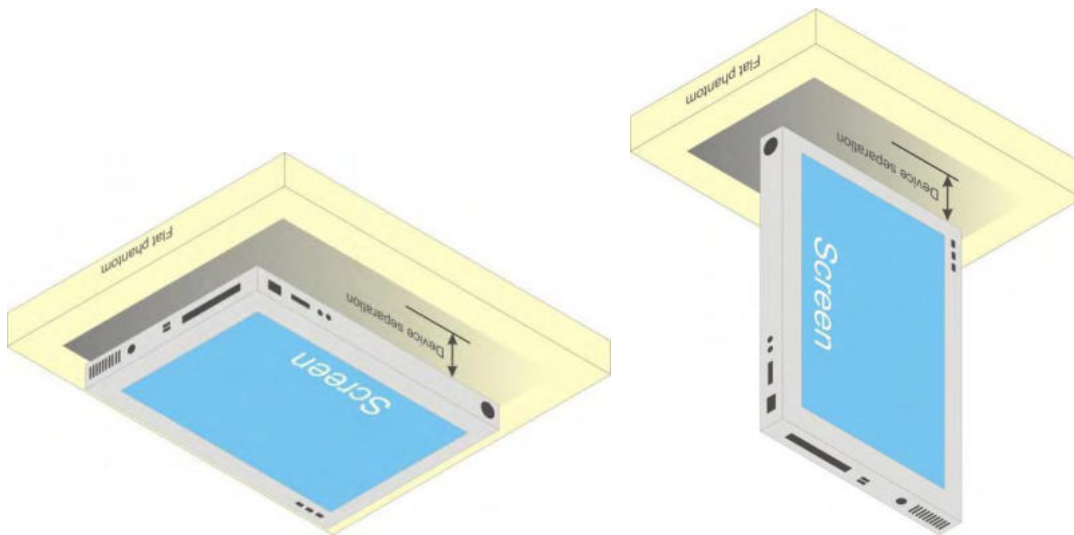


Fig-4.1 Illustration for Tablet Setup

According to KDB 447498 D01, the SAR test exclusion condition is based on source-based time-averaged maximum conducted output power, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions. The SAR exclusion threshold is determined by the following formula.

(1) The SAR exclusion threshold for distances $\leq 50\text{mm}$ is defined by the following equation:

$$\frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} * \sqrt{\text{Frequency (GHz)}} \leq 3.0$$


(2) The SAR exclusion threshold for distances $> 50\text{mm}$ is defined by the following equation, as illustrated in KDB 447498 D01 Appendix B:

a) at 100 MHz to 1500 MHz

$$[\text{Power allowed at numeric Threshold at 50 mm in step 1}) + (\text{test separation distance} - 50 \text{ mm}) \cdot (f_{\text{(MHz)}}/150)] \text{ mW}$$

b) at $> 1500 \text{ MHz}$ and $\leq 6 \text{ GHz}$

$$[\text{Power allowed at numeric Threshold at 50 mm in step 1}) + (\text{test separation distance} - 50 \text{ mm}) \cdot 10] \text{ mW}$$

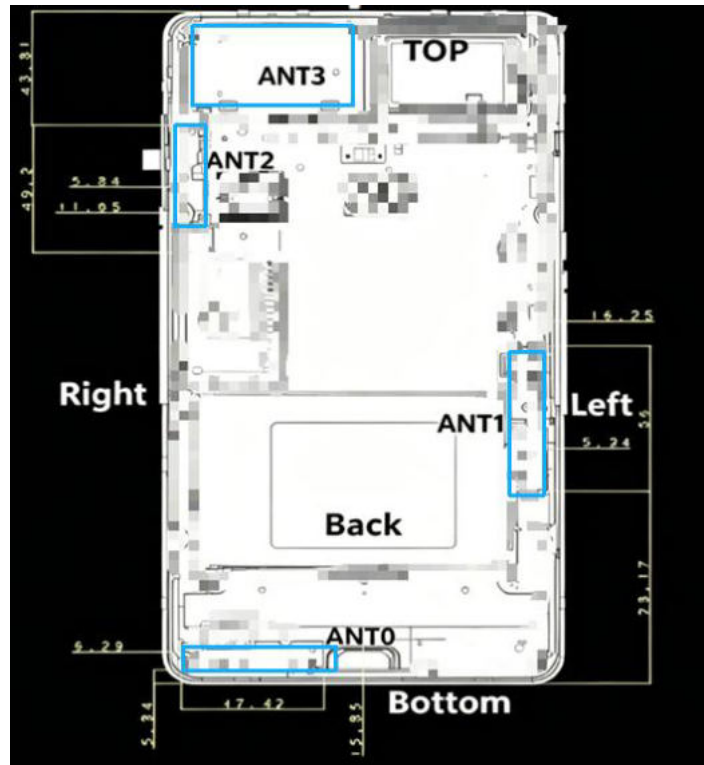

Overall (Length x Width): 262 mm x 138 mm

Overall Diagonal: 285 mm

Band	Frequency (MHz)	Max. Tune-up Power (dBm)	Back Side			Right Edge			Top Edge			Bottom Edge		
			Ant. To Surgace (mm)	Evaluation	Conclusion	Ant. To Surgace (mm)	Evaluation	Conclusion	Ant. To Surgace (mm)	Evaluation	Conclusion	Ant. To Surgace (mm)	Evaluation	Conclusion
GSM850	836.6	33.50	3.35	611.24	No	7.37	416.77	No	243.20	944.32	No	6.34	484.48	No
GSM1900	1850.2	30.50	3.35	455.58	No	7.37	208.88	No	243.20	910.97	Yes	6.34	242.82	No
WCDMA 2	1852.4	24.00	3.35	102.05	No	7.37	46.76	No	243.20	910.97	Yes	6.34	54.36	No
WCDMA 5	826.4	24.00	3.35	68.16	No	7.37	46.76	No	243.20	1011.66	Yes	6.34	54.36	No
LTE 2	1860	24.00	3.35	102.26	No	7.37	46.76	No	243.20	1062.65	Yes	6.34	54.36	No
LTE 7	2510	24.00	3.35	118.79	No	7.37	54.00	No	243.20	1027.06	Yes	6.34	62.77	No
LTE 12/17	704	24.00	3.35	62.91	No	7.37	28.60	No	243.20	1011.66	Yes	6.34	33.24	No
LTE 13	782	24.00	3.35	66.31	No	7.37	30.14	No	243.20	1011.66	Yes	6.34	35.04	No
LTE 26/5	836.5	24.00	3.35	68.58	No	7.37	30.89	No	243.20	910.97	Yes	6.34	35.91	No
LTE 41/38	2506	24.00	3.35	118.70	No	7.37	55.80	No	243.20	914.19	Yes	6.34	64.86	No
LTE 66/4	1745	24.00	3.35	99.05	No	7.37	45.34	No	243.20	890.31	Yes	6.34	52.71	No
WIFI 2.4G	2437	19.50	2.75	50.59	No	6.85	10.67	No	45.8	1.60	No	183.60	616.95	Yes
WIFI 5G	5320	19.50	2.75	74.75	No	6.85	20.61	No	45.8	3.08	No	183.60	616.95	Yes
BT	2400	13.50	2.75	12.61	No	6.85	2.75	No	45.8	0.41	No	183.60	616.95	Yes

Band	Frequency (MHz)	Max. Tune-up Power (dBm)	Left Edge		
			Ant. To Surgeance (mm)	Evaluation	Conclusion
GSM850	704	33.50	82.10	188.22	No
WCDMA 5	704	24.00	82.10	154.87	No
LTE 12/17	704	24.00	82.10	154.87	No
LTE 13	782	24.00	82.10	171.79	No
LTE 26/5	821.5	24.00	82.10	180.35	No
GSM1900	1882.5	30.50	82.10	351.79	Yes
WCDMA 2	1882.5	24.00	82.10	327.89	Yes
LTE 2	1882.5	24.00	82.10	327.89	Yes
LTE 7	2510	24.00	82.10	328.96	Yes
LTE 41/38	2680	24.00	82.10	329.22	Yes
LTE 66/4	1770	24.00	82.10	327.68	Yes
WIFI 2.4G	2400	24.00	121.30	720.78	Yes
WIFI 5G	5150	24.00	121.30	724.40	Yes
BT	2400	24.00	121.30	720.78	Yes

5.2 Measurement Variability

Per FCC KDB Publication 865664 D01, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

5.3 Test Configuration

5.3.1 GSM Test Configuration

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot. The allowed power reduction in the multi-slot configuration is as following:

Output power of reductions:

Table 3: The allowed power reduction in the multi-slot configuration

Number of timeslots in uplink assignment	Permissible nominal reduction of maximum output power,(dB)
1	0
2	0 to 3,0
3	1,8 to 4,8
4	3,0 to 6,0

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. GSM voice and GPRS data use GMSK, which is a constant amplitude modulation with minimal peak to average power difference within the time-slot burst. For EDGE, GMSK is used for MCS 1 – MCS 4 and 8-PSK is used for MCS 5 – MCS 9; where 8-PSK has an inherently higher peak-to-average power ratio. The GMSK and 8-PSK EDGE configurations are considered separately for SAR compliance. The GMSK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance. The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode.

5.3.2 WCDMA Test Configuration

5.3.2.1 3G SAR Test Reduction Procedure

The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations modes according to output power, exposure conditions and device operating capabilities. Maximum output power is verified by applying the applicable versions of 3GPP TS 34.121.

5.3.2.2 Body Accessory SAR

SAR for body accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode.

Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body accessory exposure SAR configuration in 12.2 kbps

RMC. When more than 2 DPDCHn are supported by the handset, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

5.3.2.3 Release 5 HSDPA Test Configuration

The 3G SAR test reduction procedure is applied to HSDPA body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the “Release 5 HSDPA Data Devices” section of this document, for the highest reported SAR body-worn accessory exposure configuration in 12.2 kbps RMC. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

HSDPA should be configured according to the UE category of a test device. The number of HSDSCH/ HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Table 4: Subtests for WCDMA Release 5 HSDPA

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (note 1, note 2)	CM(dB) (note 3)	MPR(dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (note 4)	15/15 (note 4)	64	12/15 (note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 8 \Rightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ Note2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. Note3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1,TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

5.3.2.4 Release 6 HSUPA Test Configuration

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the “Release 6 HSPA Data Devices” section of this document, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn accessory measurements is tested for next to the ear head exposure.

Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the β values indicated in Table 2 and other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of this document

Table 5: Sub-Test 5 Setup for Release 6 HSUPA

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Figure 5.1g.

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Table 6: HSUPA UE category

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI (ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	11484	5.76
	4	4	10		20000	2.00
7	4	8	2	2 SF2 & 2 SF4	22996	?

(No DPDCH)	4	4	10		20000	?
NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE Categories 1 to 6 supports QPSK only. UE Category 7 supports QPSK and 16QAM. (TS25.306-7.3.0)						

5.3.2.5 HSPA, HSPA+ and DC-HSDPA Test Configuration

SAR test exclusion may apply to 3GPP Rel. 6 HSPA and Rel. 8 DC-HSDPA. When SAR measurement is required for HSPA or DC-HSDPA, a KDB inquiry is required to confirm that the wireless mode configurations in the test setup have remained stable throughout the SAR measurements. Without prior KDB confirmation to determine the SAR results are acceptable, a PAG is required for equipment approval.

SAR test exclusion for HSPA, HSPA+ and DC-HSDPA is determined according to the following:

- 1) The HSPA procedures are applied to configure 3GPP Rel. 6 HSPA devices in the required sub-test mode(s) to determine SAR test exclusion.
- 2) SAR is required for Rel. 7 HSPA+ when SAR is required for Rel. 6 HSPA; otherwise, the 3G SAR test reduction procedure is applied to (uplink) HSPA+ with 12.2 kbps RMC as the primary mode. Power is measured for HSPA+ that supports uplink 16 QAM according to configurations in Table C.11.1.4 of 3GPP TS 34.121-1 to determine SAR test reduction.
- 3) SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.
- 4) Regardless of whether a PBA is required, the following information must be verified and included in the SAR report for devices supporting HSPA, HSPA+ or DC-HSDPA:
 - a) The output power measurement results and applicable release version(s) of 3GPP TS 34.121.
 - i) Power measurement difficulties due to test equipment setup or availability must be resolved between the grantee and its test lab.
 - b) The power measurement results are in agreement with the individual device implementation and specifications. When Enhanced MPR (E-MPR) applies, the normal MPR targets may be modified according to the Cubic Metric (CM) measured by the device, which must be taken into consideration.
 - c) The UE category, operating parameters, such as the β and Δ values used to configure the device for testing, power setback procedures described in 3GPP TS 34.121 for the power measurements, and HSPA/HSPA+ channel conditions (active and stable) for the entire duration of the measurement according to the required E-TFCI and AG index values.
- 5) When SAR measurement is required, the test configurations, procedures and power measurement results must be clearly described to confirm that the required test parameters are used, including E-TFCI and AG index stability and output power conditions.

Table 7: HS-DSCH UE category

Table 5.1a: FDD HS-DSCH physical layer categories

HS-DSCH category	Maximum number of HS-DSCH codes received	Minimum inter-TTI interval	Maximum number of bits of an HS-DSCH transport block received within an HS-DSCH TTI NOTE 1	Total number of soft channel bits	Supported modulations without MIMO operation or dual cell operation	Supported modulations with MIMO operation and without dual cell operation	Supported modulations with dual cell operation
Category 1	5	3	7298	19200	QPSK, 16QAM	Not applicable (MIMO not supported)	Not applicable (dual cell operation not supported)
Category 2	5	3	7298	28800			
Category 3	5	2	7298	28800			
Category 4	5	2	7298	38400			
Category 5	5	1	7298	57600			
Category 6	5	1	7298	67200			
Category 7	10	1	14411	115200			
Category 8	10	1	14411	134400			
Category 9	15	1	20251	172800			
Category 10	15	1	27952	172800			
Category 11	5	2	3630	14400	QPSK		
Category 12	5	1	3630	28800			
Category 13	15	1	35280	259200	QPSK, 16QAM, 64QAM		
Category 14	15	1	42192	259200			
Category 15	15	1	23370	345600	QPSK, 16QAM		
Category 16	15	1	27952	345600			
Category 17 NOTE 2	15	1	35280	259200	QPSK, 16QAM, 64QAM	–	
			23370	345600	–	QPSK, 16QAM	
Category 18 NOTE 3	15	1	42192	259200	QPSK, 16QAM, 64QAM	–	
			27952	345600	–	QPSK, 16QAM	
Category 19	15	1	35280	518400	QPSK, 16QAM, 64QAM		
Category 20	15	1	42192	518400			
Category 21	15	1	23370	345600	-	-	QPSK, 16QAM
Category 22	15	1	27952	345600			QPSK, 16QAM, 64QAM
Category 23	15	1	35280	518400			
Category 24	15	1	42192	518400			

5.3.3 LTE Test Configuration

LTE modes were tested according to FCC KDB 941225 D05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI (transmit time interval) supported by the device in each LTE configuration.

A) Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

B) MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

C) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

D) Largest channel bandwidth standalone SAR test requirements

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

4) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

E) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the *reported* SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

5.3.4 TDD LTE specification

For Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

TDD LTE Band supports 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Figure 4.2-1: Frame structure type 2

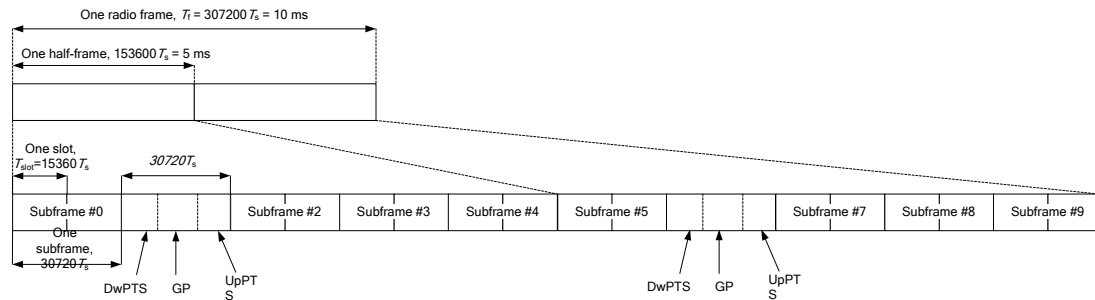


Table 8: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-	-	-

Table 9: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

According to Figure 4.2-1, one radio frame is configured by 10 subframes, which consist of Uplink-subframe, Downlink-subframe and Special subframe. For TDD-LTE, the Duty Cycle should be calculated on Uplink-subframes and Special subframes, due to Special subframe containing both Uplink transmissions. So for one radio frame, Duty Cycle can be calculated with formula as below. The count of Uplink subframes are according to Table 4.2-2:

$$\text{Duty cycle} = (30720\text{Ts} * \text{Ups} + \text{Uplink Component} * \text{Specials}) / (307200\text{Ts})$$

About the uplink component of Special subframes, we can figure out by Table 4.2-1:

$$\text{Uplink Component} = \text{UpPTS}$$

In conclusion, for the TDD LTE Band, Duty Cycle can be calculated with formula as below .all these sets are ok when we test, or we can set as below.

$$\text{Duty cycle} = [(30720\text{Ts} * \text{Ups}) + \text{UpPTS} * \text{Specials}] / (307200\text{Ts})$$

And we can get different Duty cycles under different configurations:

Uplink-downlink configuration	Subframe number			Configuration of special subframe							
				Normal cyclic prefix in downlink				Extended cyclic prefix in downlink			
				Normal cyclic prefix in uplink		Extended cyclic prefix in uplink		Normal cyclic prefix in uplink		Extended cyclic prefix in uplink	
	D	S	U	configuration 0~4	configuration 5~9	configuration 0~4	configuration 5~9	configuration 0~3	configuration 4~7	configuration 0~3	configuration 4~7
0	2	2	6	61.43%	62.85%	61.67%	63.33%	61.43%	62.85%	61.67%	63.33%
1	4	2	4	41.43%	42.85%	41.67%	43.33%	41.43%	42.85%	41.67%	43.33%
2	6	2	2	21.43%	22.85%	21.67%	23.33%	21.43%	22.85%	21.67%	23.33%
3	6	1	3	30.71%	31.43%	30.83%	31.67%	30.71%	31.43%	30.83%	31.67%
4	7	1	2	20.71%	21.43%	20.83%	21.67%	20.71%	21.43%	20.83%	21.67%
5	8	1	1	10.71%	11.43%	10.83%	11.67%	10.71%	11.43%	10.83%	11.67%
6	3	2	5	51.43%	52.85%	51.67%	53.33%	51.43%	52.85%	51.67%	53.33%

SAR test Plan: For TDD LTE, SAR should be tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7 for Frame structure type

The screenshot shows the 'LTE Signaling - Configuration' window. The 'Physical Cell Setup' section is highlighted with a red box. Within this section, the 'TDD' sub-section is also highlighted with a red box. The 'TDD' sub-section includes the following settings:

- Use Carrier Specific: ☐ (unchecked)
- Uplink Downlink Configurat...: 0 (highlighted with a red circle)
- Subframe Number: 0 1 2 3 4 5 6 7 8 9
- Direction: Down (blue arrow), Up (orange arrow), Special (yellow 'S')
- Special Subframe: 7 (highlighted with a red circle)

The 'LTE Signaling' status bar at the bottom right shows 'ON' in a yellow box.

5.3.5 Wi-Fi Test Configuration

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the *initial test position(s)* by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The *initial test position(s)* is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the *reported SAR* for the *initial test position* is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the *initial test position* to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the *reported SAR* is ≤ 0.8 W/kg or all required test positions are tested.
 - ✧ For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - ✧ When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the *initial test position* and subsequent test positions, when the *reported SAR* is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the *reported SAR* is ≤ 1.2 W/kg or all required test channels are considered.
 - ✧ The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.

To determine the initial test position, Area Scans were performed to determine the position with the Maximum Value of SAR (measured). The position that produced the highest Maximum Value of SAR is considered the worst case position; thus used as the initial test position.

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.

5.3.6 Bluetooth Test Configuration

For BT SAR testing, BT engineering testing software installed on the EUT can provide continuous transmitting RF signal with maximum output power. And the CBT control the EUT operating with hopping off and data rate set for DH5.

Note: Duty factor= 76.6%

5.2.1 Proximity Sensor Power Reduction Description

This device uses a proximity sensor to facilitate triggering in typical user interactivity with the device. Due to the operating configurations and exposure conditions required by the device, the proximity sensor is used to indicate when the is held close to a user's body exposure condition. It utilizes the proximity sensor to reduce the output power in specific wireless and operating modes to ensure SAR compliance for the following scenarios: To reduce the output power of antennas during body operating configurations. It is also set an output power leveled to the lowest one to make sure that in any case of SAR sensor hardware failure the SAR requirements can still be satisfied.

Antenna	Band	Test Position	Sensor Trigger Distance Range (DUT to Phantom)	Power Reduction Amount(dB)	Power Level
Antenna 0	GSM 850	Back Side	$0\text{mm} \leq \text{Distance} \leq 26\text{mm}$	2.5	Sensor on
			$26\text{mm} < \text{Distance}$	0	Sensor off
		Front Side	/	0	Sensor off
		Left Edge	/	0	Sensor off
		Right Edge	$0\text{mm} \leq \text{Distance} \leq 18\text{mm}$	2.5	Sensor on
			$18\text{mm} < \text{Distance}$	0	Sensor off
		Top Edge	/	0	Sensor off
		Bottom Edge	$0\text{mm} \leq \text{Distance} \leq 22\text{mm}$	2.5	Sensor on
			$22\text{mm} < \text{Distance}$	0	Sensor off
Antenna 0	GSM 1900	Back Side	$0\text{mm} \leq \text{Distance} \leq 26\text{mm}$	2	Sensor on
			$26\text{mm} < \text{Distance}$	0	Sensor off
		Front Side	/	0	Sensor off
		Left Edge	/	0	Sensor off
		Right Edge	$0\text{mm} \leq \text{Distance} \leq 18\text{mm}$	2	Sensor on
			$18\text{mm} < \text{Distance}$	0	Sensor off
		Top Edge	/	0	Sensor off
		Bottom Edge	$0\text{mm} \leq \text{Distance} \leq 22\text{mm}$	2	Sensor on
			$22\text{mm} < \text{Distance}$	0	Sensor off
Antenna 0	WCDMA B2	Back Side	$0\text{mm} \leq \text{Distance} \leq 26\text{mm}$	2.5	Sensor on
			$26\text{mm} < \text{Distance}$	0	Sensor off
		Front Side	/	0	Sensor off
		Left Edge	/	0	Sensor off
		Right Edge	$0\text{mm} \leq \text{Distance} \leq 18\text{mm}$	2.5	Sensor on
			$18\text{mm} < \text{Distance}$	0	Sensor off

		Top Edge	/	0	Sensor off
		Bottom Edge	0mm≤Distance≤22mm	2.5	Sensor on
			22mm<Distance	0	Sensor off
Antenna 0	WCDMA B5	Back Side	0mm≤Distance≤26mm	1	Sensor on
			26mm<Distance	0	Sensor off
		Front Side	/	0	Sensor off
		Left Edge	/	0	Sensor off
		Right Edge	0mm≤Distance≤18mm	1	Sensor on
			18mm<Distance	0	Sensor off
		Top Edge	/	0	Sensor off
		Bottom Edge	0mm≤Distance≤22mm	1	Sensor on
			22mm<Distance	0	Sensor off
Antenna 0	LTE B2	Back Side	0mm≤Distance≤26mm	2	Sensor on
			26mm<Distance	0	Sensor off
		Front Side	/	0	Sensor off
		Left Edge	/	0	Sensor off
		Right Edge	0mm≤Distance≤18mm	2	Sensor on
			18mm<Distance	0	Sensor off
		Top Edge	/	0	Sensor off
		Bottom Edge	0mm≤Distance≤22mm	2	Sensor on
			22mm<Distance	0	Sensor off
Antenna 0	LTE B4	Back Side	0mm≤Distance≤26mm	3	Sensor on
			26mm<Distance	0	Sensor off
		Front Side	/	0	Sensor off
		Left Edge	/	0	Sensor off
		Right Edge	0mm≤Distance≤18mm	3	Sensor on
			18mm<Distance	0	Sensor off
		Top Edge	/	0	Sensor off
		Bottom Edge	0mm≤Distance≤22mm	3	Sensor on
			22mm<Distance	0	Sensor off
Antenna 0	LTE B5	Back Side	0mm≤Distance≤26mm	1.5	Sensor on
			26mm<Distance	0	Sensor off
		Front Side	/	0	Sensor off
		Left Edge	/	0	Sensor off
		Right Edge	0mm≤Distance≤18mm	1.5	Sensor on
			18mm<Distance	0	Sensor off
		Top Edge	/	0	Sensor off
		Bottom Edge	0mm≤Distance≤22mm	1.5	Sensor on
			22mm<Distance	0	Sensor off
Antenna 0	LTE B7	Back Side	0mm≤Distance≤26mm	6.5	Sensor on
			26mm<Distance	0	Sensor off
		Front Side	/	0	Sensor off
		Left Edge	/	0	Sensor off


		Right Edge	0mm≤Distance≤18mm	6.5	Sensor on
			18mm<Distance	0	Sensor off
		Top Edge	/	0	Sensor off
		Bottom Edge	0mm≤Distance≤22mm	6.5	Sensor on
			22mm<Distance	0	Sensor off
Antenna 0	LTE B12	Back Side	0mm≤Distance≤26mm	3	Sensor on
			26mm<Distance	0	Sensor off
		Front Side	/	0	Sensor off
		Left Edge	/	0	Sensor off
		Right Edge	0mm≤Distance≤18mm	3	Sensor on
			18mm<Distance	0	Sensor off
		Top Edge	/	0	Sensor off
		Bottom Edge	0mm≤Distance≤22mm	3	Sensor on
			22mm<Distance	0	Sensor off
Antenna 0	LTE B13	Back Side	0mm≤Distance≤26mm	3	Sensor on
			26mm<Distance	0	Sensor off
		Front Side	/	0	Sensor off
		Left Edge	/	0	Sensor off
		Right Edge	0mm≤Distance≤18mm	3	Sensor on
			18mm<Distance	0	Sensor off
		Top Edge	/	0	Sensor off
		Bottom Edge	0mm≤Distance≤22mm	3	Sensor on
			22mm<Distance	0	Sensor off
Antenna 0	LTE B17	Back Side	0mm≤Distance≤26mm	3	Sensor on
			26mm<Distance	0	Sensor off
		Front Side	/	0	Sensor off
		Left Edge	/	0	Sensor off
		Right Edge	0mm≤Distance≤18mm	3	Sensor on
			18mm<Distance	0	Sensor off
		Top Edge	/	0	Sensor off
		Bottom Edge	0mm≤Distance≤22mm	3	Sensor on
			22mm<Distance	0	Sensor off
Antenna 0	LTE B26	Back Side	0mm≤Distance≤26mm	1.5	Sensor on
			26mm<Distance	0	Sensor off
		Front Side	/	0	Sensor off
		Left Edge	/	0	Sensor off
		Right Edge	0mm≤Distance≤18mm	1.5	Sensor on
			18mm<Distance	0	Sensor off
		Top Edge	/	0	Sensor off
		Bottom Edge	0mm≤Distance≤22mm	1.5	Sensor on
			22mm<Distance	0	Sensor off
Antenna 0	LTE B38	Back Side	0mm≤Distance≤26mm	4	Sensor on
			26mm<Distance	0	Sensor off

		Front Side	/	0	Sensor off
		Left Edge	/	0	Sensor off
		Right Edge	0mm≤Distance≤18mm	4	Sensor on
			18mm<Distance	0	Sensor off
		Top Edge	/	0	Sensor off
		Bottom Edge	0mm≤Distance≤22mm	4	Sensor on
			22mm<Distance	0	Sensor off
Antenna 0	LTE B41	Back Side	0mm≤Distance≤26mm	4	Sensor on
			26mm<Distance	0	Sensor off
		Front Side	/	0	Sensor off
		Left Edge	/	0	Sensor off
		Right Edge	0mm≤Distance≤18mm	4	Sensor on
			18mm<Distance	0	Sensor off
		Top Edge	/	0	Sensor off
		Bottom Edge	0mm≤Distance≤22mm	4	Sensor on
			22mm<Distance	0	Sensor off
Antenna 0	LTE B66	Back Side	0mm≤Distance≤26mm	3	Sensor on
			26mm<Distance	0	Sensor off
		Front Side	/	0	Sensor off
		Left Edge	/	0	Sensor off
		Right Edge	0mm≤Distance≤18mm	3	Sensor on
			18mm<Distance	0	Sensor off
		Top Edge	/	0	Sensor off
		Bottom Edge	0mm≤Distance≤22mm	3	Sensor on
			22mm<Distance	0	Sensor off
Antenna 2	WiFi 2.4G	Back Side	0mm≤Distance≤26mm	7.5	Sensor on
			26mm<Distance	0	Sensor off
		Front Side	/	0	Sensor off
		Left Edge	/	0	Sensor off
		Right Edge	0mm≤Distance≤18mm	7.5	Sensor on
			18mm<Distance	0	Sensor off
		Top Edge	/	0	Sensor off
		Bottom Edge	/	0	Sensor off
Antenna 2	WiFi 5G	Back Side	0mm≤Distance≤26mm	11.5	Sensor on
			26mm<Distance	0	Sensor off
		Front Side	/	0	Sensor off
		Left Edge	/	0	Sensor off
		Right Edge	0mm≤Distance≤18mm	11.5	Sensor on
			18mm<Distance	0	Sensor off
		Top Edge	/	0	Sensor off
		Bottom Edge	/	0	Sensor off

1. Proximity Sensor Coverage, Distance and Angle

1.1) Procedures for determining proximity sensor triggering distances

The proximity sensor triggering distance measurement method are as below:

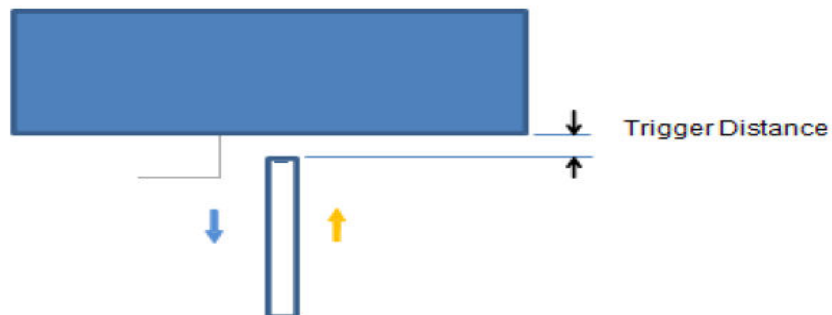

Picture: Proximity sensor triggering distances assessment (Right/Bottom side)



Picture: Proximity sensor triggering distances assessment (Back side)

Table: Summary of Trigger Distances:

Antenna	Band	Trigger distance- Back Side		Trigger distance- Right Edge		Trigger distance- Bottom Edge	
		Moving toward Phantom	Moving away from Phantom	Moving toward Phantom	Moving away from Phantom	Moving toward Phantom	Moving away from Phantom
Antenna 0	GSM 850	26	26	18	18	22	22
Antenna 0	GSM 1900	26	26	18	18	22	22
Antenna 0	WCDMA B2	26	26	18	18	22	22
Antenna 0	WCDMA B5	26	26	18	18	22	22
Antenna 0	LTE B2	26	26	18	18	22	22
Antenna 0	LTE B4	26	26	18	18	22	22
Antenna 0	LTE B5	26	26	18	18	22	22
Antenna 0	LTE B7	26	26	18	18	22	22
Antenna 0	LTE B12	26	26	18	18	22	22
Antenna 0	LTE B13	26	26	18	18	22	22
Antenna 0	LTE B17	26	26	18	18	22	22

Report No.: EFTA26020037-IE-03-S1V1

Antenna	Band	Trigger distance- Back Side		Trigger distance- Right Edge	
		Moving toward Phantom	Moving away from Phantom	Moving toward Phantom	Moving away from Phantom
Antenna 2	Wi-Fi 2.4G	26	26	18	18
Antenna 2	Wi-Fi U-NII-1	26	26	18	18
Antenna 2	Wi-Fi U-NII-2A	26	26	18	18
Antenna 2	Wi-Fi U-NII-2C	26	26	18	18
Antenna 2	Wi-Fi U-NII-3	26	26	18	18

[illegible][illegible][illegible]

Eurofins TA Technology (Shanghai) Co., Ltd. **TA-MB-02-011S** **Page 30 of 223**
This report shall not be reproduced except in full, without the written approval of Eurofins TA Technology (Shanghai) Co., Ltd.

[illegible]

This report shall not be reproduced except in full, without the written approval of Eurofins TA Technology (Shanghai) Co., Ltd.

Antenna	Band(MHz)	Position	Minimum trigger distance at which power reduction was maintained over $\pm 45^\circ$	Power Reduction Status											
				-45°	-35°	-25°	-15°	-5°	0°	5°	15°	25°	35°	45°	
Antenna 0	GSM 850	Bottom Edge	22mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	GSM 1900	Bottom Edge	22mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	WCDMA B2	Bottom Edge	22mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	WCDMA B5	Bottom Edge	22mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	LTE B2	Bottom Edge	22mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	LTE B4	Bottom Edge	22mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	LTE B5	Bottom Edge	22mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	LTE B7	Bottom Edge	22mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	LTE B12	Bottom Edge	22mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	LTE B13	Bottom Edge	22mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	LTE B17	Bottom Edge	22mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	LTE B26	Bottom Edge	22mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	LTE B38	Bottom Edge	22mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	LTE B41	Bottom Edge	22mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	LTE B66	Bottom Edge	22mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	GSM 850	Right Edge	18mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	GSM 1900	Right Edge	18mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	WCDMA B2	Right Edge	18mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	WCDMA B5	Right Edge	18mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	LTE B2	Right Edge	18mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	LTE B4	Right Edge	18mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	LTE B5	Right Edge	18mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	LTE B7	Right Edge	18mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	LTE B12	Right Edge	18mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	LTE B13	Right Edge	18mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	LTE B17	Right Edge	18mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	LTE B26	Right Edge	18mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	LTE B38	Right Edge	18mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	LTE B41	Right Edge	18mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 0	LTE B66	Right Edge	18mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 2	Wi-Fi 2.4G	Right Edge	18mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 2	Wi-Fi U-NII-1	Right Edge	18mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 2	Wi-Fi U-NII-2A	Right Edge	18mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 2	Wi-Fi U-NII-2C	Right Edge	18mm	on	on	on	on	on	on	on	on	on	on	on	
Antenna 2	Wi-Fi U-NII-3	Right Edge	18mm	on	on	on	on	on	on	on	on	on	on	on	

Conclusion: As is shown from the validation data, it can be ensured that the proximity sensor can be valid triggered for the EUT tilt coverage exposure condition (GSM 850/1900, WCDMA Band 2/5, LTE Band 2/4/5/7/12/17/26/38/41/66 with Antenna 0; Wi-Fi 2.4G/5G with Antenna 2)

2. Summary Additional SAR Test Plan for Proximity Sensor Power Reduction

The smallest separation distance determined by the sensor triggering and sensor coverage for normal and tilt positions for all usage conditions, minus 1 mm, must be used as the test separation distance for additional SAR testing with sensor off.

For this device, as proximity sensor power reduction supports multiple power stages, so we plan that the additional SAR should be considered at the conservative distance, minus 1 mm, for each power stage.


Antenna 1		Power Reduction Level Amount (dB)														
Power Reduction Scenario		GSM850	GSM1900	WCDMA B2	WCDMA B5	LTE B2	LTE B4	LTE B5	LTE B7	LTE B12	LTE B13	LTE B17	LTE B26	LTE B38	LTE B41	LTE B66
Full power	Full power	33.50	30.50	24.00	24.00	24.50	24.50	25.00	24.50	25.00	25.00	25.00	25.00	24.50	24.50	24.50
	Sensor on	3.00	2.00	3.00	2.00	3.00	4.00	2.50	7.00	4.00	3.50	4.00	2.50	4.00	4.00	4.00
Standalone	Sensor off	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Sensor on	3.00	2.00	3.00	2.00	3.00	4.00	2.50	7.00	4.00	3.50	4.00	2.50	4.00	4.00	4.00
Simultaneous	Wi-Fi on	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Wi-Fi Antenna		Power Reduction Level Amount (dB)															
Power Reduction Scenario		WiFi 2.4G 11b	WiFi 2.4G 11g	WiFi 2.4G 11n HT20	WiFi 2.4G 11n HT40	WiFi 2.4G 11ax HE20	WiFi 2.4G 11ax HE40	WiFi 5G 11a	WiFi 5G 11n HT20	WiFi 5G 11n HT40	WiFi 5G 802.11a c-VHT20	WiFi 5G 802.11a c-VHT40	WiFi 5G 802.11a c-VHT80	WiFi 5G 802.11a x-HE20	WiFi 5G 802.11a x-HE40	WiFi 5G 802.11a x-HE80	WiFi 5G 802.11ax-HE160
Full power	Full power	22.00	20.00	20.00	20.00	20.00	20.00	17.00	15.00	16.50	15.00	16.50	16.00	15.00	16.50	16.00	18.50
	Sensor on	7.50	6.50	6.50	6.50	6.50	6.50	9.00	8.50	9.00	8.50	9.00	9.00	8.50	9.00	9.00	11.50
Standalone	Sensor off	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Sensor on	7.50	6.50	6.50	6.50	6.50	6.50	9.00	8.50	9.00	8.50	9.00	9.00	8.50	9.00	9.00	11.50

6 SAR Measurements System Configuration

6.1 SAR Measurement Set-up

The DASY system for performing compliance tests consists of the following items:

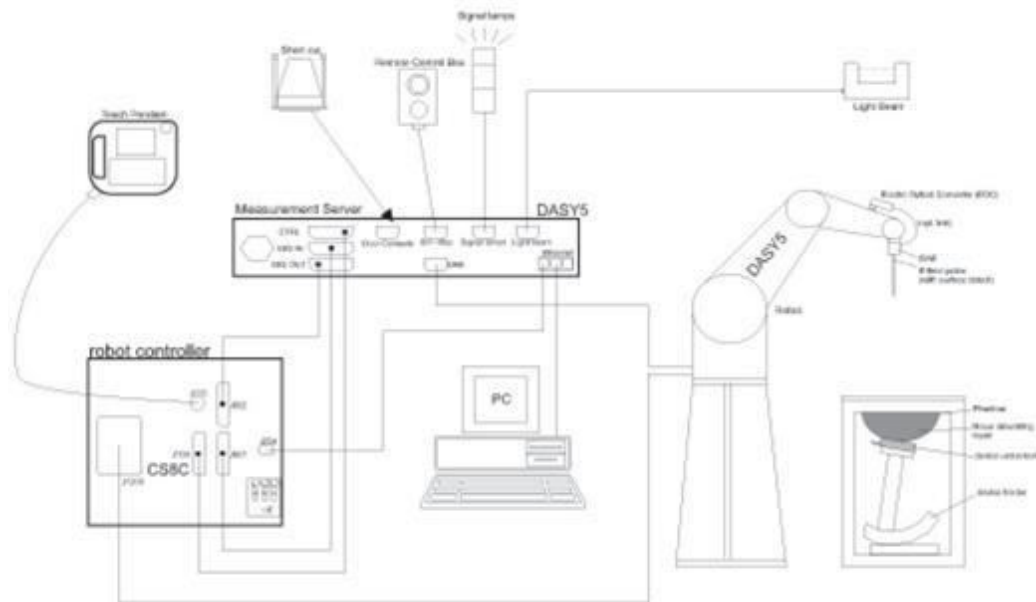

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.2 DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

EX3DV4 Probe Specification

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure Scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than ± 0.25 dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \Delta T / \Delta t$$

Where: Δt = Exposure time (30 seconds),
 C = Heat capacity of tissue (brain or muscle),
 ΔT = Temperature increase due to RF exposure.

Or

$$\text{SAR} = I E I^2 \sigma / \rho$$

Where: σ = Simulated tissue conductivity,
 ρ = Tissue density (kg/m^3).

6.3 SAR Measurement Procedure

Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			≤3GHz	> 3 GHz
Maximum zoom scan spatial resolution: Δx_{zoom} Δy_{zoom}			≤2GHz: ≤8mm 2 – 3GHz: ≤5mm*	3 – 4GHz: ≤5mm* 4 – 6GHz: ≤4mm*
Maximum zoom scan spatial resolution, normal to phantom surface	Uniform grid: $\Delta z_{\text{zoom}}(n)$		≤5mm	3 – 4GHz: ≤4mm 4 – 5GHz: ≤3mm 5 – 6GHz: ≤2mm
	Graded grid	$\Delta z_{\text{zoom}}(1)$: between 1 st two points closest to phantom surface	≤4mm	3 – 4GHz: ≤3mm 4 – 5GHz: ≤2.5mm 5 – 6GHz: ≤2mm
		$\Delta z_{\text{zoom}}(n > 1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{zoom}}(n-1)$	
Minimum zoom scan volume	X, y, z		≥30mm	3 – 4GHz: ≥28mm 4 – 5GHz: ≥25mm 5 – 6GHz: ≥22mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4\text{W/kg}$, $\leq 8\text{mm}$, $\leq 7\text{mm}$ and $\leq 5\text{mm}$ zoom scan resolution may be applied, respectively, for 2GHz to 3GHz, 3GHz to 4GHz and 4GHz to 6GHz.				

Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remains in the same test position for all measurements and all volume scans use the same spatial resolution and grid spacing. When all volume scans were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculate the multiband SAR.

Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

7 Main Test Equipment

Name of Equipment	Manufacturer	Type/Model	Serial Number	Software Version	Last Cal.	Cal. Due Date
Network Analyzer	Agilent	E5071B	MY42404014	/	2025-11-24	2026-11-23
Dielectric Probe Kit	SPEAG	DAK-3.5	1332	/	2025-06-15	2027-06-14
Power Meter	Agilent	E4417A	GB41291714	/	2025-05-06	2026-05-05
Power Sensor	Agilent	N8481H	MY50350004	/	2025-05-06	2026-05-05
Power Sensor	Agilent	E9327A	US40441622	/	2025-05-06	2026-05-05
Signal Generator	KEYSIGHT	N5182B-X07	MY51350303	/	2025-11-24	2026-11-23
Dual Directional Coupler	UCL	UCL-DDC056G-S	20010600118	/	/	/
Amplifier	R&S	SCU18F	101022	/	2025-05-06	2026-05-05
Wireless Communication Tester	Anritsu	MT8820C	6201342015	/	2025-05-06	2026-05-05
Wireless Communication Tester	R&S	CMW 500	146734	/	2025-05-06	2026-05-05
E-field Probe	SPEAG	EX3DV4	3677	/	2025-05-28	2026-05-27
DAE	SPEAG	DAE4	1317	/	2025-11-19	2026-11-18
Validation Kit 750MHz	SPEAG	D750V3	1045	/	2023-09-12	2026-09-11
Validation Kit 835MHz	SPEAG	D835V2	4d020	/	2023-09-15	2026-09-14
Validation Kit 1750MHz	SPEAG	D1750V2	1033	/	2023-03-23	2026-03-22
Validation Kit 1900MHz	SPEAG	D1900V2	5d060	/	2023-09-12	2026-09-11
Validation Kit 2450MHz	SPEAG	D2450V2	786	/	2023-09-12	2026-09-11
Validation Kit 2600MHz	SPEAG	D2600V2	1025	/	2024-05-08	2027-05-07
Validation Kit 5GHz	SPEAG	D5GHzV2	1151	/	2026-03-16	2029-03-15
Tissue test software	SPEAG	/	/	3.0.4.1	/	/
Temperature Probe	Auden	DTM3000	3905	/	2025-11-27	2026-11-26
Twin ELI Phantom	SPEAG	ELI v4.0	1058	/	/	/
Hygrothermograph	Anymetr	HTC - 1	TA2025A045	/	2025-05-06	2026-05-05
Test System	SPEAG	TX90 XLspeag	F08/5AH5A1/ A/01	52.10.4.15 27	/	/

8 Tissue Dielectric Parameter Measurements & System Check

8.1 Tissue Verification

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance.

Target values

Frequency (MHz)	ϵ_r	$\sigma(\text{s/m})$
750	42.0	0.90
835	41.5	0.90
1750	40.1	1.37
1900	40.0	1.40
2450	39.2	1.80
2600	39.0	1.96
5250	35.9	4.71
5600	35.5	5.07
5750	35.4	5.22


Measurements results

Frequency (MHz)	Test Date	Temp ℃	Measured Dielectric Parameters		Target Dielectric Parameters		Limit (Within ±5%)	
			ϵ_r	σ (s/m)	ϵ_r	σ (s/m)	Dev ϵ_r (%)	Dev σ (%)
750	3/17/2026	21.5	42.3	0.88	42.0	0.90	0.71	-2.22
835	3/18/2026	21.5	41.4	0.88	41.5	0.90	-0.24	-2.22
1750	3/19/2026	21.5	40.2	1.34	40.1	1.37	0.25	-2.19
1900	3/20/2026	21.5	40.1	1.41	40.0	1.40	0.25	0.71
2450	3/21/2026	21.5	38.6	1.81	39.2	1.80	-1.53	0.56
2600	3/22/2026	21.5	38.2	2.01	39.0	1.96	-2.05	2.55
5250	3/23/2026	21.5	35.5	4.80	35.9	4.71	-1.11	1.91
5600	3/23/2026	21.5	34.2	5.21	35.5	5.07	-3.66	2.76
5750	3/23/2026	21.5	34.9	5.21	35.4	5.22	-1.41	-0.19
Note: For the tissue-equivalent liquid in the phantom, its depth shall be not less than 15.0 cm when the frequency band is below 3 GHz, and not less than 10.0 cm when the frequency band is above 3 GHz.								

8.2 System Check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulates were measured using the dielectric probe kit and the network analyzer. A system check measurement for every day was made following the determination of the dielectric parameters of the Tissue simulates, using the dipole validation kit. The dipole antenna was placed under the flat section of the twin SAM phantom.

System check is performed regularly on all frequency bands where tests are performed with the DASY system.

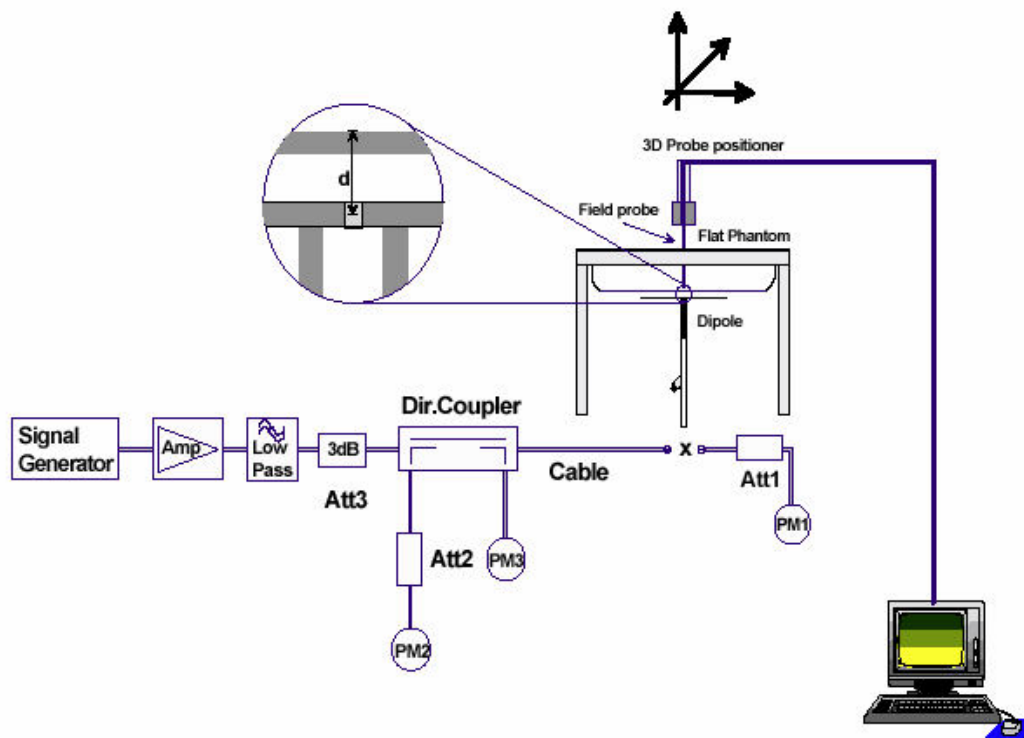

Picture 1 System Performance Check setup



Picture 2 Setup Photo

Justification for Extended SAR Dipole Calibrations

Usage of SAR dipoles calibrated less than 3 years ago but more than 1 year ago were confirmed in maintaining return loss (< -20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB 865664 D01:

Dipole		Date of Measurement	Return Loss (dB)	Δ %	Impedance (Ω)			
					Real	$\Delta\Omega$	Imaginary	$\Delta\Omega$
Dipole D750V3 SN: 1045	Head Liquid	9/12/2023	30.4	/	51.9	/	-2.47	/
		9/11/2024	30.1	-0.9	52.3	0.4	-2.46	0.01
		9/10/2025	29.8	-1.1	52.1	-0.2	-1.99	0.47
Dipole D835V2 SN: 4d020	Head Liquid	9/15/2023	28.3	/	50.6	/	-3.80	/
		9/14/2024	28.9	2.1	51.4	0.8	-3.66	0.14
		9/13/2025	27.9	-3.6	50.3	-1.1	-3.57	0.09
Dipole D1750V2 SN: 1033	Head Liquid	3/23/2023	36.2	/	51.2	/	-0.98	/
		3/22/2024	35.4	-2.2	51.6	0.4	-1.28	-0.3
		3/21/2025	36.7	3.7	49.8	-1.8	-0.72	0.56
Dipole D1900V2 SN: 5d060	Head Liquid	9/12/2023	24.0	/	50.5	/	6.32	/
		9/11/2024	24.1	0.4	50.9	0.4	6.83	0.51
		9/10/2025	24.3	0.9	51.5	0.6	6.62	-0.21
Dipole D2450V2 SN:786	Head Liquid	9/12/2023	28.2	/	52.2	/	3.34	/
		9/11/2024	28.6	1.4	52.8	0.6	3.43	0.09
		9/10/2025	28.0	-1.9	51.9	-0.9	3.58	0.15
Dipole D2600V2 SN: 1025	Head Liquid	5/08/2024	24.2	/	49.0	/	-6.02	/
		5/07/2025	24.6	1.7	50.1	1.1	-5.92	0.1

System Check results

Frequency (MHz)	Test Date	Temp °C	250mW Measured SAR _{1g} (W/kg)	1W Normalized SAR _{1g} (W/kg)	1W Target SAR _{1g} (W/kg)	Δ % (Limit ±10%)	Plot No.
750	3/17/2026	21.5	2.13	8.52	8.47	0.59	1
835	3/18/2026	21.5	2.44	9.76	9.75	0.10	2
1750	3/19/2026	21.5	8.95	35.80	36.60	-2.19	3
1900	3/20/2026	21.5	9.88	39.52	40.40	-2.18	4
2450	3/21/2026	21.5	13.70	54.80	52.60	4.18	5
2600	3/22/2026	21.5	13.90	55.60	55.50	0.18	6
Frequency (MHz)	Test Date	Temp °C	100mW Measured SAR _{1g} (W/kg)	1W Normalized SAR _{1g} (W/kg)	1W Target SAR _{1g} (W/kg)	Δ % (Limit ±10%)	Plot No.
5250	3/23/2026	21.5	7.87	78.70	77.20	1.03	7
5600	3/23/2026	21.5	7.67	76.70	82.00	-6.46	8
5750	3/23/2026	21.5	7.66	76.60	77.90	-1.67	9
Note: Target Values used derive from the calibration certificate data storage and evaluation.							

8.3 SAR System Validation

Per FCC KDB 865664 D02v01, SAR system verification is required to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles are used with the required tissue-equivalent media for system validation, according to the procedures outlined in FCC KDB 865664 D01 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point must be validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status, measurement frequencies, SAR probes, calibrated signal type(s) and tissue dielectric parameters has been included.

Frequency [MHz]	Date	Probe SN	Probe Type	Probe Cal Point		PERM (Er)	COND (Σ)	CW Validation		
								Sensitivity	Probe Linearity	Probe Isotropy
750	2025/05/28	3677	EX3DV4	750	Head	41.9	0.89	PASS	PASS	PASS
835	2025/05/28	3677	EX3DV4	835	Head	41.5	0.90	PASS	PASS	PASS
1750	2025/05/28	3677	EX3DV4	1750	Head	40.1	1.37	PASS	PASS	PASS
1900	2025/05/28	3677	EX3DV4	1900	Head	40.0	1.40	PASS	PASS	PASS
2450	2025/05/28	3677	EX3DV4	2450	Head	39.2	1.80	PASS	PASS	PASS
2600	2025/05/28	3677	EX3DV4	2600	Head	39.0	1.96	PASS	PASS	PASS
5250	2025/05/28	3677	EX3DV4	5250	Head	35.9	4.71	PASS	PASS	PASS
5600	2025/05/28	3677	EX3DV4	5600	Head	35.5	5.07	PASS	PASS	PASS
5750	2025/05/28	3677	EX3DV4	5750	Head	35.4	5.22	PASS	PASS	PASS

NOTE: While the probes have been calibrated for both CW and modulated signals, all measurements were performed using communication systems calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664D01v01 for scenarios when CW probe calibrations are used with other signal types. SAR systems were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5dB), such as OFDM according to KDB 865664.

9 Normal and Maximum Output Power

KDB 447498 D01 at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit.

9.1 GSM Mode

GSM 850 Sensor off--Ant0		Burst-Averaged output power(dBm)				Division Factors	Frame-Averaged output power(dBm)			
		Tune-up	Channel/Frenqucy(MHz)				Tune-up	Channel/Frenqucy(MHz)		
		MAX	128 /824.2	190 /836.6	251 /848.8		MAX	128 /824.2	190 /836.6	251 /848.8
GPRS (GMSK)	1 Tx Slot	33.50	31.75	31.76	31.68	9.03	24.47	22.72	22.73	22.65
	2 Tx Slots	32.00	31.21	31.21	31.16	6.02	25.98	25.19	25.19	25.14
	3 Tx Slots	30.00	29.68	29.71	29.68	4.26	25.74	25.42	25.45	25.42
	4 Tx Slots	29.00	28.59	28.62	28.58	3.01	25.99	25.58	25.61	25.57
EGPRS (8PSK)	1 Tx Slot	28.00	26.60	26.54	26.68	9.03	18.97	17.57	17.51	17.65
	2 Tx Slots	27.00	25.61	25.52	25.73	6.02	20.98	19.59	19.50	19.71
	3 Tx Slots	25.00	23.60	23.61	23.65	4.26	20.74	19.34	19.35	19.39
	4 Tx Slots	23.00	22.43	22.40	22.48	3.01	19.99	19.42	19.39	19.47
GSM 850 Sensor on--Ant0		Burst-Averaged output power(dBm)				Division Factors MAX	Frame-Averaged output power(dBm)			
		Tune-up	Channel/Frenqucy(MHz)				Tune-up	Tune-up		
		MAX	128 /824.2	190 /836.6	124 /914.8		128 /824.2	190 /836.6	38 /897.6	MAX
GPRS (GMSK)	1 Tx Slot	30.50	29.55	29.60	29.49	9.03	21.47	20.52	20.57	20.46
	2 Tx Slots	29.50	29.01	29.10	29.42	6.02	23.48	22.99	23.08	23.40
	3 Tx Slots	27.50	26.91	27.01	26.94	4.26	23.24	22.65	22.75	22.68
	4 Tx Slots	26.50	25.79	25.91	25.86	3.01	23.49	22.78	22.90	22.85
EGPRS (8PSK)	1 Tx Slot	25.00	23.80	23.66	23.72	9.03	15.97	14.77	14.63	14.69
	2 Tx Slots	24.00	22.91	22.64	23.26	6.02	17.98	16.89	16.62	17.24
	3 Tx Slots	22.00	20.96	20.74	20.78	4.26	17.74	16.70	16.48	16.52
	4 Tx Slots	20.50	19.67	19.78	19.69	3.01	17.49	16.66	16.77	16.68
GSM 1900 Sensor off--Ant0		Burst-Averaged output power(dBm)				Division Factors MAX	Frame-Averaged output power(dBm)			
		Tune-up	Channel/Frenqucy(MHz)				Tune-up	Tune-up		
		MAX	512 /1850.2	661 /1880	885 /1784.8		512 /1850.2	661 /1880	698 /1747.4	MAX
GPRS (GMSK)	1 Tx Slot	30.50	28.65	28.89	29.09	9.03	21.47	19.62	19.86	20.06
	2 Tx Slots	29.50	28.11	28.37	28.58	6.02	23.48	22.09	22.35	22.56
	3 Tx Slots	28.00	26.59	26.91	27.19	4.26	23.74	22.33	22.65	22.93

	4 Tx Slots	26.50	25.43	25.78	26.17	3.01	23.49	22.42	22.77	23.16
EGPRS (8PSK)	1 Tx Slot	28.00	26.42	26.13	26.03	9.03	18.97	17.39	17.10	17.00
	2 Tx Slots	27.00	25.52	25.15	25.01	6.02	20.98	19.50	19.13	18.99
	3 Tx Slots	25.00	23.62	23.23	23.16	4.26	20.74	19.36	18.97	18.90
	4 Tx Slots	23.00	22.59	22.16	22.04	3.01	19.99	19.58	19.15	19.03
GSM 1900 Sensor on--Ant0		Burst-Averaged output power(dBm)				Division Factors	Frame-Averaged output power(dBm)			
		Tune-up	Channel/Frenqucy(MHz)				Tune-up	Channel/Frenqucy(MHz)		
		MAX	512 /1850.2	661 /1880	810 /1909.8		MAX	512 /1850.2	661 /1880	810 /1909.8
GPRS (GMSK)	1 Tx Slot	28.50	28.00	27.94	27.85	9.03	19.47	18.97	18.91	18.82
	2 Tx Slots	27.50	26.96	26.83	26.87	6.02	21.48	20.94	20.81	20.85
	3 Tx Slots	26.00	24.78	24.77	24.62	4.26	21.74	20.52	20.51	20.36
	4 Tx Slots	24.50	23.71	23.83	23.69	3.01	21.49	20.70	20.82	20.68
EGPRS (8PSK)	1 Tx Slot	26.00	24.52	24.63	24.52	9.03	16.97	15.49	15.60	15.49
	2 Tx Slots	25.00	23.51	23.75	23.49	6.02	18.98	17.49	17.73	17.47
	3 Tx Slots	23.00	21.39	21.42	21.28	4.26	18.74	17.13	17.16	17.02
	4 Tx Slots	21.00	20.12	20.07	20.21	3.01	17.99	17.11	17.06	17.20
Notes:The worst-case configuration and mode for SAR testing is determined to be as follows: 1. Standalone: GSM 850 GMSK (GPRS) mode with 4 time slots for Max power, GSM 900 GMSK (GPRS) mode with 4 time slots for Max power, GSM 1800 GMSK (GPRS) mode with 4 time slots for Max power, GSM 1900 GMSK (GPRS) mode with 4 time slots for Max power,based on the output power measurements above..										

9.2 WCDMA Mode

The following tests were completed according to the test requirements outlined in the 3GPP TS34.121 specification.

WCDMA Sensor off--Ant0		Band II(dBm)				Band V(dBm)			
Tx Channel		9262	9400	9538	Tune-up Limit	4132	4183	4233	Tune-up Limit
Frequency (MHz)		1852.4	1880	1907.6		826.4	836.6	846.6	
RMC	12.2k	22.93	22.75	22.60	24.00	22.76	22.73	22.75	24.00
HSDPA	Subtest 1	22.39	22.17	22.04	23.00	22.22	22.15	22.19	23.00
	Subtest 2	22.38	22.19	22.01	23.00	22.21	22.17	22.16	23.00
	Subtest 3	21.85	21.69	21.53	22.50	21.68	21.67	21.68	22.50
	Subtest 4	21.86	21.70	21.51	22.50	21.69	21.68	21.66	22.50
HSUPA	Subtest 1	22.35	22.16	21.99	22.50	22.18	22.14	22.14	22.50
	Subtest 2	21.34	21.14	20.98	22.00	21.17	21.12	21.13	22.00
	Subtest 3	21.81	21.62	21.47	23.00	21.64	21.60	21.62	23.00
	Subtest 4	21.27	21.11	20.95	21.50	21.10	21.09	21.10	21.50
	Subtest 5	22.28	22.09	21.93	23.00	22.11	22.07	22.08	23.00
DC- HSDPA	Subtest 1	22.27	22.11	21.94	23.00	22.10	22.09	22.09	23.00
	Subtest 2	22.26	22.10	21.93	23.00	22.09	22.08	22.08	23.00
	Subtest 3	21.84	21.59	21.44	22.50	21.67	21.57	21.59	22.50
	Subtest 4	21.83	21.58	21.43	22.50	21.66	21.56	21.58	22.50
HSPA+	16QAM	21.82	21.66	21.50	22.00	21.65	21.64	21.65	22.00

Note: 1. Per KDB 941225 D01, SAR for each exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".

WCDMA Sensor on--Ant0		Band II(dBm)				Band V(dBm)			
Tx Channel		9262	9400	9538	Tune-up Limit	4132	4183	4233	Tune-up Limit
Frequency (MHz)		1852.4	1880	1907.6		826.4	836.6	846.6	
RMC	12.2k	20.32	20.13	20.51	21.00	21.33	21.36	21.31	22.00
HSDPA	Subtest 1	19.24	19.05	19.63	20.00	20.39	20.28	20.43	21.00
	Subtest 2	19.28	18.99	19.57	20.00	20.25	20.32	20.31	21.00
	Subtest 3	18.78	18.63	18.95	19.50	19.77	19.98	19.87	20.50
	Subtest 4	18.96	18.59	19.09	19.50	19.79	19.96	19.73	20.50
HSUPA	Subtest 1	18.66	18.55	18.85	19.50	19.73	20.00	19.67	20.50
	Subtest 2	18.18	18.03	18.47	19.00	19.23	19.34	19.33	20.00
	Subtest 3	19.42	19.15	19.63	20.00	20.31	20.48	20.33	21.00
	Subtest 4	17.96	17.51	18.09	18.50	18.67	18.96	18.79	19.50

	Subtest 5	19.32	19.15	19.45	20.00	20.41	20.46	20.41	21.00
DC-HSDPA	Subtest 1	19.26	19.03	19.63	20.00	20.43	20.24	20.33	21.00
	Subtest 2	19.40	19.09	19.39	20.00	20.31	20.44	20.19	21.00
	Subtest 3	18.88	18.55	18.93	19.50	19.71	19.98	19.67	20.50
	Subtest 4	18.74	18.51	19.09	19.50	19.83	19.76	19.69	20.50
HSPA+	16QAM	18.32	18.19	18.61	19.00	19.31	19.32	19.43	20.00

Note: 1. Per KDB 941225 D01, SAR for each exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".

9.3 LTE Mode

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3

LTE B2							
Sensor off--Ant0				Maximum Output Power (dBm)			Tune-up
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			
				18607/1850.7	18900/1880	19193/1909.3	
1.4MHz	QPSK	1	0	22.63	22.94	22.75	24.50
		1	2	22.87	22.95	22.81	24.50
		1	5	22.95	22.73	22.60	24.50
		3	0	22.93	22.73	22.88	24.50
		3	2	22.78	22.85	22.85	24.50
		3	3	22.96	23.06	22.89	24.50
		6	0	22.27	22.13	21.87	23.50
	16QAM	1	0	21.97	21.85	21.74	23.50
		1	2	21.99	21.98	21.82	23.50
		1	5	21.99	21.80	21.66	23.50
		3	0	21.83	21.79	21.76	23.50
		3	2	21.90	22.07	21.86	23.50
		3	3	21.78	21.70	21.57	23.50
		6	0	21.12	20.87	20.84	22.50
	64QAM	1	0	21.26	21.22	21.13	22.50
		1	2	21.37	20.99	21.19	22.50
		1	5	20.93	21.08	20.87	22.50
		3	0	20.73	20.99	20.70	22.50
		3	2	20.78	20.85	21.03	22.50
		3	3	20.83	21.01	20.80	22.50
		6	0	20.25	20.10	19.68	21.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				18615/1851.5	18900/1880	19185/1908.5	
3MHz	QPSK	1	0	22.79	22.76	22.61	24.50

		1	7	22.89	22.85	22.73	24.50
		1	14	22.77	22.73	22.64	24.50
		8	0	22.01	21.97	21.84	23.50
		8	4	22.10	22.07	21.93	23.50
		8	7	22.02	22.00	21.87	23.50
		15	0	22.03	21.99	21.87	23.50
	16QAM	1	0	21.99	21.99	21.84	23.50
		1	7	22.11	22.10	21.98	23.50
		1	14	22.05	21.96	21.78	23.50
		8	0	21.03	21.03	20.88	22.50
		8	4	21.12	21.09	20.96	22.50
		8	7	21.06	21.00	20.89	22.50
		15	0	20.98	20.93	20.82	22.50
	64QAM	1	0	21.06	21.00	20.89	22.50
		1	7	21.15	21.13	21.05	22.50
		1	14	21.03	20.98	20.91	22.50
		8	0	20.05	20.01	19.84	21.50
		8	4	20.10	20.05	19.95	21.50
		8	7	20.03	20.03	19.88	21.50
		15	0	20.01	19.98	19.84	21.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				18625/1852.5	18900/1880	19175/1907.5	
5MHz	QPSK	1	0	23.02	22.99	22.81	24.50
		1	13	23.16	23.10	22.95	24.50
		1	24	23.03	22.96	22.82	24.50
		12	0	22.08	22.07	21.97	23.50
		12	6	22.19	22.15	22.01	23.50
		12	13	22.10	22.06	21.92	23.50
		25	0	22.12	22.05	21.94	23.50
	16QAM	1	0	22.19	22.28	22.08	23.50
		1	13	22.33	22.34	22.18	23.50
		1	24	22.31	22.16	22.07	23.50
		12	0	21.05	21.01	20.92	22.50
		12	6	21.13	21.12	20.98	22.50
		12	13	21.11	21.01	20.86	22.50
		25	0	21.12	21.06	20.91	22.50
	64QAM	1	0	21.17	21.20	21.01	22.50
		1	13	21.31	21.31	21.14	22.50
		1	24	21.20	21.20	21.02	22.50
		12	0	20.10	20.05	19.96	21.50
		12	6	20.19	20.17	20.03	21.50
		12	13	20.13	20.05	19.92	21.50
		25	0	20.07	20.03	19.93	21.50

Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				18650/1855	18900/1880	19150/1905	
10MHz	QPSK	1	0	23.09	23.07	22.98	24.50
		1	25	23.16	23.11	22.98	24.50
		1	49	23.09	23.04	22.92	24.50
		25	0	22.07	22.02	21.98	23.50
		25	13	22.19	22.13	22.01	23.50
		25	25	22.11	22.07	21.91	23.50
		50	0	22.12	22.07	21.95	23.50
	16QAM	1	0	22.34	22.35	22.23	23.50
		1	25	22.44	22.37	22.25	23.50
		1	49	22.36	22.27	22.20	23.50
		25	0	21.06	21.01	20.94	22.50
		25	13	21.16	21.13	21.02	22.50
		25	25	21.11	21.05	20.87	22.50
		50	0	21.07	21.07	20.90	22.50
	64QAM	1	0	21.32	21.23	21.08	22.50
		1	25	21.37	21.25	21.07	22.50
		1	49	21.27	21.18	21.06	22.50
		25	0	20.07	20.04	19.96	21.50
		25	13	20.20	20.14	20.03	21.50
		25	25	20.14	20.05	19.89	21.50
		50	0	20.11	20.05	19.91	21.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				18675/1857.5	18900/1880	19125/1902.5	
15MHz	QPSK	1	0	23.08	23.05	22.94	24.50
		1	38	23.18	23.14	22.96	24.50
		1	74	23.05	22.96	22.89	24.50
		36	0	22.12	22.07	21.98	23.50
		36	18	22.18	22.11	22.05	23.50
		36	39	22.11	22.06	21.93	23.50
		75	0	22.12	22.08	22.00	23.50
	16QAM	1	0	22.30	22.32	22.16	23.50
		1	38	22.48	22.38	22.24	23.50
		1	74	22.30	22.18	22.12	23.50
		36	0	21.11	21.05	20.98	22.50
		36	18	21.17	21.11	21.00	22.50
		36	39	21.13	21.05	20.90	22.50
		75	0	21.12	21.04	20.95	22.50
	64QAM	1	0	21.21	21.24	21.15	22.50
		1	38	21.32	21.33	21.21	22.50
		1	74	21.18	21.19	21.10	22.50
		36	0	20.16	20.09	20.00	21.50

		36	18	20.18	20.14	20.01	21.50
		36	39	20.14	20.07	19.94	21.50
		75	0	20.09	20.04	19.96	21.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				18700/1860	18900/1880	19100/1900	
20MHz	QPSK	1	0	23.12	23.14	23.14	24.50
		1	50	23.17	23.17	23.04	24.50
		1	99	22.95	22.90	22.83	24.50
		50	0	22.15	22.03	22.01	23.50
		50	25	22.20	22.18	22.11	23.50
		50	50	22.17	22.10	21.97	23.50
		100	0	22.14	22.03	21.95	23.50
	16QAM	1	0	22.22	22.26	22.32	23.50
		1	50	22.50	22.39	22.32	23.50
		1	99	22.22	22.13	22.09	23.50
		50	0	21.10	21.01	20.96	22.50
		50	25	21.17	21.14	21.05	22.50
		50	50	21.14	21.06	20.91	22.50
		100	0	21.11	21.02	20.92	22.50
	64QAM	1	0	21.30	21.23	21.20	22.50
		1	50	21.29	21.23	21.25	22.50
		1	99	21.00	20.96	20.99	22.50
		50	0	20.11	20.02	19.96	21.50
		50	25	20.14	20.17	20.05	21.50
		50	50	20.17	20.05	19.93	21.50
		100	0	20.12	20.02	19.92	21.50
LTE B2							
Sensor on--Ant0				Maximum Output Power (dBm)			Tune-up
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			
				18607/1850.7	18900/1880	19193/1909.3	
1.4MHz	QPSK	1	0	20.68	20.74	20.73	22.00
		1	2	21.02	20.91	20.89	22.00
		1	5	20.77	20.65	20.57	22.00
		3	0	20.94	20.75	20.71	22.00
		3	2	20.74	20.76	20.66	22.00
		3	3	20.68	20.70	20.59	22.00
		6	0	20.76	20.58	20.66	22.00
	16QAM	1	0	20.99	20.73	20.77	22.00
		1	2	21.02	20.94	21.13	22.00
		1	5	20.88	20.95	20.74	22.00
		3	0	20.60	20.75	20.58	22.00
		3	2	20.91	20.62	20.84	22.00
		3	3	20.83	20.76	20.58	22.00

	64QAM	6	0	20.88	20.79	20.74	22.00
		1	0	20.89	20.85	20.81	22.00
		1	2	21.03	20.89	20.94	22.00
		1	5	20.82	20.84	20.55	22.00
		3	0	20.98	20.85	20.99	22.00
		3	2	20.57	20.33	20.63	22.00
		3	3	20.66	20.99	20.57	22.00
		6	0	20.73	20.47	20.56	21.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				18615/1851.5	18900/1880	19185/1908.5	
3MHz	QPSK	1	0	20.72	20.88	20.57	21.50
		1	7	20.84	20.75	20.93	21.50
		1	14	20.69	20.33	20.67	21.50
		8	0	20.50	20.97	20.39	21.50
		8	4	20.82	20.86	21.06	21.50
		8	7	20.90	20.82	20.71	21.50
		15	0	20.72	20.64	20.86	21.50
	16QAM	1	0	20.75	20.71	20.89	21.50
		1	7	21.18	20.92	21.09	21.50
		1	14	21.18	20.85	20.96	21.50
		8	0	20.68	20.83	21.04	21.50
		8	4	21.09	20.76	20.90	21.50
		8	7	20.81	20.72	20.80	21.50
		15	0	20.62	20.49	20.54	21.50
	64QAM	1	0	21.15	20.69	20.91	21.50
		1	7	21.33	20.83	20.94	21.50
		1	14	20.93	20.88	20.77	21.50
		8	0	20.45	20.53	20.24	21.50
		8	4	20.83	20.38	20.69	21.50
		8	7	20.67	20.75	20.44	21.50
		15	0	20.47	20.47	20.54	21.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				18625/1852.5	18900/1880	19175/1907.5	
5MHz	QPSK	1	0	20.86	20.64	20.61	21.50
		1	13	20.96	20.93	20.77	21.50
		1	24	20.75	20.69	20.61	21.50
		12	0	20.92	20.63	20.77	21.50
		12	6	20.98	20.78	20.88	21.50
		12	13	20.82	20.80	20.75	21.50
		25	0	20.94	20.76	20.72	21.50
	16QAM	1	0	20.87	21.07	20.87	21.50
		1	13	21.08	21.14	21.05	21.50
		1	24	20.96	20.99	20.92	21.50

		12	0	20.74	20.67	20.84	21.50
		12	6	20.85	20.88	20.88	21.50
		12	13	21.01	20.82	20.70	21.50
		25	0	20.94	20.75	20.60	21.50
	64QAM	1	0	20.99	20.95	20.89	21.50
		1	13	21.19	20.95	20.98	21.50
		1	24	21.05	20.96	20.83	21.50
		12	0	20.73	20.59	20.50	21.50
		12	6	20.77	20.56	20.69	21.50
		12	13	20.77	20.63	20.62	21.50
		25	0	20.55	20.57	20.62	21.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				18650/1855	18900/1880	19150/1905	
10MHz	QPSK	1	0	20.84	20.46	20.91	21.50
		1	25	21.02	20.95	20.87	21.50
		1	49	20.69	20.45	20.81	21.50
		25	0	21.02	20.59	20.85	21.50
		25	13	20.78	21.02	20.76	21.50
		25	25	21.08	20.66	20.87	21.50
		50	0	20.96	20.64	20.70	21.50
	16QAM	1	0	20.89	21.05	21.15	21.50
		1	25	20.96	21.00	21.05	21.50
		1	49	21.00	20.93	20.80	21.50
		25	0	20.80	20.81	20.78	21.50
		25	13	20.77	20.84	21.02	21.50
		25	25	20.97	20.86	20.64	21.50
		50	0	21.02	20.75	20.72	21.50
	64QAM	1	0	20.83	20.97	20.93	21.50
		1	25	21.17	21.17	20.66	21.50
		1	49	20.81	20.88	20.53	21.50
		25	0	20.67	20.49	20.58	21.50
		25	13	20.55	20.76	20.51	21.50
		25	25	20.81	20.43	20.58	21.50
		50	0	20.81	20.31	20.40	21.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				18675/1857.5	18900/1880	19125/1902.5	
15MHz	QPSK	1	0	20.76	20.54	20.61	21.50
		1	38	21.06	20.77	20.81	21.50
		1	74	20.57	20.53	20.77	21.50
		36	0	21.02	20.91	20.81	21.50
		36	18	20.82	20.76	20.80	21.50
		36	39	20.82	20.70	20.57	21.50
		75	0	20.82	20.70	20.62	21.50

	16QAM	1	0	20.79	21.03	21.03	21.50
		1	38	21.14	21.18	21.27	21.50
		1	74	21.10	20.91	20.98	21.50
		36	0	20.88	20.65	20.82	21.50
		36	18	20.79	20.96	20.96	21.50
		36	39	20.99	20.64	20.80	21.50
		75	0	21.02	20.73	20.86	21.50
	64QAM	1	0	20.79	20.81	20.73	21.50
		1	38	21.21	21.05	20.76	21.50
		1	74	20.85	20.70	20.73	21.50
		36	0	20.79	20.45	20.64	21.50
		36	18	20.77	20.64	20.73	21.50
		36	39	20.79	20.63	20.36	21.50
		75	0	20.61	20.65	20.42	21.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				18700/1860	18900/1880	19100/1900	
20MHz	QPSK	1	0	20.70	20.64	20.69	21.50
		1	50	20.92	20.83	20.85	21.50
		1	99	20.67	20.55	20.61	21.50
		50	0	20.84	20.73	20.73	21.50
		50	25	20.92	20.88	20.82	21.50
		50	50	20.88	20.76	20.69	21.50
		100	0	20.86	20.72	20.70	21.50
	16QAM	1	0	20.91	20.93	20.97	21.50
		1	50	21.14	21.14	21.11	21.50
		1	99	20.92	20.91	20.86	21.50
		50	0	20.80	20.69	20.74	21.50
		50	25	20.89	20.82	20.84	21.50
		50	50	20.89	20.72	20.68	21.50
		100	0	20.84	20.69	20.70	21.50
	64QAM	1	0	20.89	20.81	20.75	21.50
		1	50	21.11	21.01	20.84	21.50
		1	99	20.89	20.80	20.67	21.50
		50	0	20.61	20.47	20.54	21.50
		50	25	20.67	20.60	20.61	21.50
		50	50	20.65	20.53	20.46	21.50
		100	0	20.63	20.49	20.48	21.50

LTE B4							
Sensor off--Ant0				Maximum Output Power (dBm)			Tune-up
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			
				19957/1710.7	20175/1732.5	20393/1754.3	
1.4MHz	QPSK	1	0	22.59	22.53	22.66	24.50

		1	2	22.71	22.86	22.70	24.50
		1	5	22.54	22.69	22.73	24.50
		3	0	22.55	22.58	22.57	24.50
		3	2	22.76	23.02	22.71	24.50
		3	3	22.62	22.82	22.65	24.50
		6	0	22.00	21.74	22.08	23.50
	16QAM	1	0	22.08	21.98	22.06	23.50
		1	2	22.22	22.20	21.95	23.50
		1	5	22.05	22.03	21.98	23.50
		3	0	21.76	22.05	21.76	23.50
		3	2	22.04	21.78	21.90	23.50
		3	3	21.75	22.00	21.92	23.50
		6	0	20.76	21.02	20.95	22.50
	64QAM	1	0	21.08	20.85	20.93	22.50
		1	2	20.97	21.05	21.04	22.50
		1	5	21.04	20.90	20.95	22.50
		3	0	21.01	20.63	20.85	22.50
		3	2	20.78	20.93	20.72	22.50
		3	3	21.00	20.91	20.65	22.50
		6	0	20.07	19.92	20.19	21.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				19965/1711.5	20175/1732.5	20385/1753.5	
3MHz	QPSK	1	0	22.67	22.67	22.66	24.50
		1	7	22.77	22.74	22.80	24.50
		1	14	22.68	22.61	22.61	24.50
		8	0	21.87	21.86	21.89	23.50
		8	4	21.94	21.96	21.97	23.50
		8	7	21.90	21.90	21.89	23.50
		15	0	21.90	21.88	21.90	23.50
	16QAM	1	0	21.88	21.98	21.90	23.50
		1	7	22.00	22.04	22.05	23.50
		1	14	21.87	21.93	21.88	23.50
		8	0	20.96	20.99	21.00	22.50
		8	4	21.00	21.00	21.02	22.50
		8	7	20.93	20.94	20.96	22.50
		15	0	20.88	20.88	20.91	22.50
	64QAM	1	0	20.98	20.99	20.97	22.50
		1	7	21.05	21.07	21.08	22.50
		1	14	20.92	20.94	20.99	22.50
		8	0	19.93	19.93	19.97	21.50
		8	4	20.00	20.01	20.04	21.50
		8	7	19.94	19.93	19.97	21.50
		15	0	19.93	19.92	19.95	21.50

Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				19975/1712.5	20175/1732.5	20375/1752.5	
5MHz	QPSK	1	0	22.90	22.90	22.90	24.50
		1	13	23.02	23.02	23.04	24.50
		1	24	22.85	22.84	22.89	24.50
		12	0	21.90	21.92	21.95	23.50
		12	6	22.04	22.03	22.04	23.50
		12	13	21.99	21.94	21.96	23.50
		25	0	21.94	21.97	21.99	23.50
	16QAM	1	0	22.16	22.20	22.10	23.50
		1	13	22.30	22.29	22.20	23.50
		1	24	22.14	22.15	22.08	23.50
		12	0	20.93	20.93	20.98	22.50
		12	6	21.01	21.01	21.06	22.50
		12	13	20.99	20.96	20.97	22.50
		25	0	20.96	20.98	21.04	22.50
	64QAM	1	0	21.11	21.13	21.10	22.50
		1	13	21.19	21.25	21.24	22.50
		1	24	21.04	21.06	21.16	22.50
		12	0	19.98	19.98	20.01	21.50
		12	6	20.07	20.05	20.14	21.50
		12	13	20.02	20.03	20.01	21.50
		25	0	19.98	19.98	20.02	21.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				20000/1715	20175/1732.5	20350/1750	
10MHz	QPSK	1	0	22.98	23.05	22.96	24.50
		1	25	23.00	23.05	23.05	24.50
		1	49	22.97	22.95	22.95	24.50
		25	0	21.92	21.97	21.94	23.50
		25	13	22.01	22.00	22.05	23.50
		25	25	21.97	21.94	22.00	23.50
		50	0	21.95	22.01	21.99	23.50
	16QAM	1	0	22.23	22.26	22.24	23.50
		1	25	22.26	22.26	22.31	23.50
		1	49	22.22	22.19	22.21	23.50
		25	0	20.93	20.98	20.98	22.50
		25	13	21.04	21.02	21.05	22.50
		25	25	20.97	20.99	21.02	22.50
		50	0	20.97	20.96	20.99	22.50
	64QAM	1	0	21.14	21.19	21.17	22.50
		1	25	21.21	21.18	21.26	22.50
		1	49	21.14	21.09	21.17	22.50
		25	0	19.95	19.96	20.01	21.50

		25	13	20.04	20.05	20.09	21.50
		25	25	19.97	20.00	20.01	21.50
		50	0	19.97	20.00	19.98	21.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				20025/1717.5	20175/1732.5	20325/1747.5	
15MHz	QPSK	1	0	22.87	22.95	22.99	24.50
		1	38	23.00	23.01	23.03	24.50
		1	74	22.88	22.90	22.91	24.50
		36	0	21.99	21.94	21.98	23.50
		36	18	22.01	21.99	21.99	23.50
		36	39	21.98	21.98	21.96	23.50
		75	0	22.00	21.97	22.01	23.50
	16QAM	1	0	22.18	22.33	22.33	23.50
		1	38	22.27	22.37	22.34	23.50
		1	74	22.19	22.24	22.20	23.50
		36	0	20.95	20.95	20.96	22.50
		36	18	20.99	21.00	21.00	22.50
		36	39	20.98	20.97	20.96	22.50
		75	0	20.96	20.97	20.95	22.50
	64QAM	1	0	21.16	21.14	21.09	22.50
		1	38	21.25	21.19	21.10	22.50
		1	74	21.10	21.03	21.01	22.50
		36	0	20.02	19.98	20.03	21.50
		36	18	20.05	20.05	20.05	21.50
		36	39	20.01	20.04	19.98	21.50
		75	0	19.98	20.00	19.97	21.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				20050/1720	20175/1732.5	20300/1745	
20MHz	QPSK	1	0	23.00	22.96	22.99	24.50
		1	50	23.04	23.02	22.98	24.50
		1	99	22.84	22.81	22.78	24.50
		50	0	22.00	21.99	21.97	23.50
		50	25	22.06	22.08	22.07	23.50
		50	50	22.01	22.03	21.99	23.50
		100	0	22.00	21.95	21.97	23.50
	16QAM	1	0	22.22	22.21	22.19	23.50
		1	50	22.33	22.26	22.29	23.50
		1	99	22.14	22.00	22.06	23.50
		50	0	20.98	20.95	20.94	22.50
		50	25	21.07	21.07	21.07	22.50
		50	50	20.94	21.03	21.00	22.50
		100	0	20.96	20.95	20.96	22.50
	64QAM	1	0	21.25	21.22	21.22	22.50

		1	50	21.25	21.27	21.23	22.50
		1	99	21.04	21.01	21.01	22.50
		50	0	20.02	19.96	19.95	21.50
		50	25	20.07	20.07	20.03	21.50
		50	50	19.98	20.01	20.00	21.50
		100	0	19.98	19.98	19.98	21.50
LTE B4							
Sensor on--Ant0				Maximum Output Power (dBm)			Tune-up
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			
				19957/1710.7	20175/1732.5	20393/1754.3	
1.4MHz	QPSK	1	0	19.55	19.52	19.82	21.00
		1	2	19.86	19.88	19.56	21.00
		1	5	19.59	19.40	19.71	21.00
		3	0	19.91	19.73	19.61	21.00
		3	2	19.70	19.74	19.97	21.00
		3	3	19.65	19.46	19.72	21.00
		6	0	19.78	19.65	19.71	21.00
	16QAM	1	0	20.19	19.66	19.94	21.00
		1	2	20.09	19.89	20.22	21.00
		1	5	19.80	19.70	19.87	21.00
		3	0	19.65	19.61	19.41	21.00
		3	2	19.54	19.52	19.94	21.00
		3	3	19.53	19.53	19.46	21.00
		6	0	19.72	19.65	19.58	21.00
	64QAM	1	0	19.63	19.67	19.76	21.00
		1	2	19.74	20.00	19.85	21.00
		1	5	19.79	19.83	19.83	21.00
		3	0	19.90	19.72	19.73	21.00
		3	2	19.57	19.55	19.64	21.00
		3	3	19.59	19.80	19.61	21.00
		6	0	19.78	19.81	19.49	21.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				19965/1711.5	20175/1732.5	20385/1753.5	
3MHz	QPSK	1	0	19.45	19.42	19.64	20.50
		1	7	19.74	19.76	19.62	20.50
		1	14	19.63	19.42	19.61	20.50
		8	0	19.73	19.65	19.73	20.50
		8	4	19.62	19.56	19.83	20.50
		8	7	19.73	19.58	19.62	20.50
		15	0	19.70	19.73	19.59	20.50
	16QAM	1	0	20.03	19.66	19.96	20.50
		1	7	20.01	19.91	20.08	20.50
1		14	19.78	19.74	19.83	20.50	

		8	0	19.73	19.47	19.49	20.50
		8	4	19.60	19.62	19.84	20.50
		8	7	19.63	19.59	19.56	20.50
		15	0	19.78	19.63	19.54	20.50
	64QAM	1	0	19.75	19.71	19.68	20.50
		1	7	19.82	20.06	19.79	20.50
		1	14	19.73	19.73	19.71	20.50
		8	0	19.72	19.76	19.65	20.50
		8	4	19.63	19.63	19.66	20.50
		8	7	19.53	19.70	19.71	20.50
		15	0	19.78	19.67	19.53	20.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				19975/1712.5	20175/1732.5	20375/1752.5	
5MHz	QPSK	1	0	19.63	19.46	19.50	20.50
		1	13	19.54	19.70	19.70	20.50
		1	24	19.47	19.50	19.55	20.50
		12	0	19.45	19.53	19.41	20.50
		12	6	19.62	19.68	19.75	20.50
		12	13	19.53	19.70	19.68	20.50
		25	0	19.46	19.51	19.65	20.50
	16QAM	1	0	19.81	19.56	19.76	20.50
		1	13	20.09	19.83	19.82	20.50
		1	24	19.72	19.64	19.61	20.50
		12	0	19.49	19.49	19.41	20.50
		12	6	19.70	19.70	19.70	20.50
		12	13	19.69	19.57	19.50	20.50
		25	0	19.60	19.41	19.64	20.50
	64QAM	1	0	19.69	19.81	19.74	20.50
		1	13	19.86	19.84	19.77	20.50
		1	24	19.57	19.65	19.63	20.50
		12	0	19.74	19.50	19.67	20.50
		12	6	19.53	19.75	19.50	20.50
		12	13	19.63	19.66	19.47	20.50
		25	0	19.52	19.43	19.51	20.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				20000/1715	20175/1732.5	20350/1750	
10MHz	QPSK	1	0	19.61	19.46	19.56	20.50
		1	25	19.90	19.58	19.56	20.50
		1	49	19.35	19.58	19.53	20.50
		25	0	19.79	19.59	19.71	20.50
		25	13	19.84	19.74	19.59	20.50
		25	25	19.59	19.68	19.46	20.50
		50	0	19.70	19.59	19.67	20.50

	16QAM	1	0	19.75	19.86	19.76	20.50
		1	25	19.89	20.03	20.12	20.50
		1	49	19.74	19.86	19.73	20.50
		25	0	19.63	19.73	19.65	20.50
		25	13	19.82	19.86	19.74	20.50
		25	25	19.75	19.89	19.76	20.50
		50	0	19.46	19.67	19.58	20.50
	64QAM	1	0	19.57	19.71	19.70	20.50
		1	25	19.76	20.06	20.07	20.50
		1	49	19.67	19.63	19.87	20.50
		25	0	19.60	19.48	19.49	20.50
		25	13	19.69	19.69	19.78	20.50
		25	25	19.45	19.72	19.89	20.50
		50	0	19.54	19.75	19.47	20.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				20025/1717.5	20175/1732.5	20325/1747.5	
15MHz	QPSK	1	0	19.73	19.52	19.50	20.50
		1	38	19.60	19.68	19.74	20.50
		1	74	19.55	19.42	19.53	20.50
		36	0	19.57	19.47	19.75	20.50
		36	18	19.58	19.74	19.63	20.50
		36	39	19.75	19.58	19.62	20.50
		75	0	19.72	19.65	19.53	20.50
	16QAM	1	0	20.01	19.88	19.90	20.50
		1	38	20.25	19.89	19.98	20.50
		1	74	19.84	19.88	19.71	20.50
		36	0	19.65	19.61	19.55	20.50
		36	18	19.76	19.64	19.72	20.50
		36	39	19.67	19.81	19.54	20.50
		75	0	19.76	19.55	19.70	20.50
	64QAM	1	0	19.69	19.95	19.60	20.50
		1	38	20.08	19.84	19.95	20.50
		1	74	19.83	19.69	19.59	20.50
		36	0	19.60	19.74	19.67	20.50
		36	18	19.89	19.59	19.52	20.50
		36	39	19.59	19.66	19.71	20.50
		75	0	19.64	19.71	19.75	20.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				20050/1720	20175/1732.5	20300/1745	
20MHz	QPSK	1	0	19.55	19.48	19.48	20.50
		1	50	19.70	19.66	19.64	20.50
		1	99	19.47	19.44	19.47	20.50
		50	0	19.63	19.55	19.59	20.50

		50	25	19.68	19.64	19.67	20.50
		50	50	19.61	19.66	19.64	20.50
		100	0	19.60	19.59	19.57	20.50
	16QAM	1	0	19.89	19.76	19.80	20.50
		1	50	20.07	19.97	19.96	20.50
		1	99	19.84	19.72	19.79	20.50
		50	0	19.61	19.57	19.57	20.50
		50	25	19.70	19.64	19.68	20.50
		50	50	19.59	19.67	19.64	20.50
		100	0	19.64	19.59	19.60	20.50
	64QAM	1	0	19.73	19.79	19.72	20.50
		1	50	19.92	19.94	19.89	20.50
		1	99	19.73	19.71	19.71	20.50
		50	0	19.66	19.60	19.57	20.50
		50	25	19.73	19.69	19.64	20.50
		50	50	19.61	19.64	19.67	20.50
		100	0	19.64	19.63	19.57	20.50

LTE B5							
Sensor off--Ant0				Maximum Output Power (dBm)			Tune-up
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			
				20407/824.7	20525/836.5	20643/848.3	
1.4MHz	QPSK	1	0	23.23	23.20	23.33	25.00
		1	2	23.21	23.37	23.33	25.00
		1	5	23.27	23.20	23.18	25.00
		3	0	23.33	23.22	23.31	25.00
		3	2	23.33	23.45	23.47	25.00
		3	3	23.43	23.10	23.30	25.00
		6	0	22.34	22.38	22.42	24.00
	16QAM	1	0	22.42	22.42	22.51	24.00
		1	2	22.58	22.51	22.59	24.00
		1	5	22.38	22.28	22.38	24.00
		3	0	22.30	22.36	22.35	24.00
		3	2	22.74	22.57	22.53	24.00
		3	3	22.46	22.32	22.36	24.00
		6	0	21.26	21.49	21.47	23.00
	64QAM	1	0	21.29	21.46	21.46	23.00
		1	2	21.59	21.44	21.58	23.00
		1	5	21.54	21.57	21.49	23.00
		3	0	21.35	21.50	21.44	23.00
		3	2	21.59	21.50	21.56	23.00
		3	3	21.46	21.49	21.55	23.00
		6	0	20.49	20.46	20.45	22.00

Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				20415/825.5	20525/836.5	20635/847.5	
3MHz	QPSK	1	0	23.13	23.10	23.21	25.00
		1	7	23.23	23.21	23.27	25.00
		1	14	23.13	23.16	23.20	25.00
		8	0	22.33	22.34	22.40	24.00
		8	4	22.36	22.43	22.47	24.00
		8	7	22.36	22.38	22.43	24.00
		15	0	22.36	22.40	22.46	24.00
	16QAM	1	0	22.36	22.30	22.35	24.00
		1	7	22.48	22.43	22.49	24.00
		1	14	22.40	22.36	22.36	24.00
		8	0	21.39	21.36	21.46	23.00
		8	4	21.47	21.45	21.51	23.00
		8	7	21.39	21.39	21.50	23.00
		15	0	21.32	21.39	21.45	23.00
	64QAM	1	0	21.31	21.36	21.48	23.00
		1	7	21.45	21.46	21.58	23.00
		1	14	21.38	21.41	21.47	23.00
		8	0	20.41	20.36	20.48	22.00
		8	4	20.45	20.47	20.55	22.00
		8	7	20.38	20.41	20.48	22.00
		15	0	20.37	20.36	20.43	22.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				20425/826.5	20525/836.5	20625/846.5	
5MHz	QPSK	1	0	23.35	23.33	23.35	25.00
		1	13	23.49	23.44	23.53	25.00
		1	24	23.37	23.38	23.39	25.00
		12	0	22.39	22.41	22.49	24.00
		12	6	22.48	22.50	22.53	24.00
		12	13	22.44	22.43	22.48	24.00
		25	0	22.44	22.44	22.50	24.00
	16QAM	1	0	22.56	22.52	22.63	24.00
		1	13	22.65	22.62	22.78	24.00
		1	24	22.62	22.57	22.60	24.00
		12	0	21.40	21.38	21.47	23.00
		12	6	21.46	21.45	21.51	23.00
		12	13	21.41	21.40	21.46	23.00
		25	0	21.41	21.45	21.52	23.00
	64QAM	1	0	21.48	21.48	21.54	23.00
		1	13	21.67	21.65	21.67	23.00
		1	24	21.56	21.52	21.55	23.00
		12	0	20.44	20.43	20.53	22.00

		12	6	20.47	20.54	20.60	22.00
		12	13	20.50	20.44	20.52	22.00
		25	0	20.46	20.45	20.54	22.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				20450/829	20525/836.5	20600/844	
10MHz	QPSK	1	0	23.38	23.41	23.44	25.00
		1	25	23.48	23.44	23.48	25.00
		1	49	23.41	23.47	23.52	25.00
		25	0	22.35	22.43	22.50	24.00
		25	13	22.49	22.52	22.52	24.00
		25	25	22.48	22.43	22.42	24.00
		50	0	22.47	22.50	22.53	24.00
	16QAM	1	0	22.57	22.59	22.63	24.00
		1	25	22.63	22.65	22.71	24.00
		1	49	22.59	22.61	22.71	24.00
		25	0	21.35	21.37	21.51	23.00
		25	13	21.46	21.49	21.54	23.00
		25	25	21.47	21.40	21.43	23.00
		50	0	21.43	21.44	21.48	23.00
	64QAM	1	0	21.57	21.59	21.63	23.00
		1	25	21.63	21.59	21.62	23.00
		1	49	21.63	21.60	21.61	23.00
		25	0	20.36	20.41	20.52	22.00
		25	13	20.52	20.54	20.55	22.00
		25	25	20.48	20.43	20.45	22.00
		50	0	20.47	20.43	20.51	22.00
LTE B5							
Sensor on--Ant0				Maximum Output Power (dBm)			Tune-up
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			
				20407/824.7	20525/836.5	20643/848.3	
1.4MHz	QPSK	1	0	21.89	21.99	21.90	23.00
		1	2	22.12	21.81	21.86	23.00
		1	5	21.94	21.78	21.83	23.00
		3	0	21.96	21.93	22.04	23.00
		3	2	22.00	21.98	21.87	23.00
		3	3	21.83	22.01	21.98	23.00
		6	0	21.94	22.06	22.10	23.00
	16QAM	1	0	22.25	22.33	22.05	23.00
		1	2	22.31	22.31	22.22	23.00
		1	5	22.19	22.10	22.11	23.00
		3	0	22.33	22.47	22.19	23.00
		3	2	22.31	22.49	22.30	23.00
		3	3	22.37	22.16	22.07	23.00

	64QAM	6	0	20.83	20.78	21.08	22.00
		1	0	20.85	20.93	20.79	22.00
		1	2	20.89	20.95	20.98	22.00
		1	5	20.89	21.04	21.21	22.00
		3	0	20.85	20.89	20.93	22.00
		3	2	20.83	20.93	20.96	22.00
		3	3	20.77	21.04	21.39	22.00
		6	0	19.79	19.73	19.87	21.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				20415/825.5	20525/836.5	20635/847.5	
3MHz	QPSK	1	0	21.85	22.03	22.06	22.50
		1	7	21.96	22.19	22.06	22.50
		1	14	21.88	21.96	21.81	22.50
		8	0	22.06	22.17	22.02	22.50
		8	4	21.84	22.22	21.99	22.50
		8	7	21.87	22.11	22.04	22.50
		15	0	22.18	22.16	22.00	22.50
	16QAM	1	0	22.43	22.29	22.27	22.50
		1	7	22.23	22.17	22.34	22.50
		1	14	22.47	22.14	22.17	22.50
		8	0	20.77	20.75	20.95	22.00
		8	4	20.90	20.79	21.16	22.00
		8	7	21.19	20.76	20.75	22.00
		15	0	20.99	21.12	20.84	22.00
	64QAM	1	0	20.83	21.11	20.87	22.00
		1	7	21.11	21.31	21.04	22.00
		1	14	20.93	21.14	20.99	22.00
		8	0	19.84	19.65	19.94	21.00
		8	4	20.04	20.08	20.03	21.00
		8	7	19.96	19.97	20.27	21.00
		15	0	19.67	19.89	20.13	21.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				20425/826.5	20525/836.5	20625/846.5	
5MHz	QPSK	1	0	22.07	22.01	22.04	22.50
		1	13	22.00	22.15	22.16	22.50
		1	24	21.92	22.02	21.99	22.50
		12	0	22.10	21.93	21.92	22.50
		12	6	22.16	21.94	22.13	22.50
		12	13	21.91	21.85	22.08	22.50
		25	0	22.06	22.18	21.94	22.50
	16QAM	1	0	22.31	22.15	22.17	22.50
		1	13	22.31	22.35	22.26	22.50
		1	24	22.19	22.46	22.43	22.50

		12	0	20.99	20.81	20.91	22.00
		12	6	21.06	20.81	20.96	22.00
		12	13	21.09	20.70	20.81	22.00
		25	0	20.81	21.00	20.90	22.00
	64QAM	1	0	20.87	21.05	21.11	22.00
		1	13	20.81	21.17	21.00	22.00
		1	24	21.21	21.14	21.23	22.00
		12	0	19.88	19.67	19.96	21.00
		12	6	19.76	20.04	20.03	21.00
		12	13	20.04	20.11	19.99	21.00
		25	0	20.03	19.69	20.03	21.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				20450/829	20525/836.5	20600/844	
10MHz	QPSK	1	0	21.95	21.97	21.94	22.50
		1	25	22.04	21.99	22.00	22.50
		1	49	21.98	21.98	21.99	22.50
		25	0	21.94	21.97	22.00	22.50
		25	13	22.02	22.04	21.99	22.50
		25	25	22.01	21.95	21.92	22.50
		50	0	22.00	22.02	22.00	22.50
	16QAM	1	0	22.27	22.27	22.25	22.50
		1	25	22.33	22.29	22.24	22.50
		1	49	22.31	22.28	22.27	22.50
		25	0	20.91	20.75	20.83	22.00
		25	13	21.06	20.89	21.06	22.00
		25	25	20.97	20.82	20.81	22.00
		50	0	20.79	20.92	21.02	22.00
	64QAM	1	0	20.99	20.89	20.93	22.00
		1	25	20.93	21.09	21.12	22.00
		1	49	21.07	20.98	21.13	22.00
		25	0	19.92	19.71	19.88	21.00
		25	13	19.84	20.00	20.13	21.00
		25	25	19.90	19.99	20.05	21.00
		50	0	19.85	19.77	20.07	21.00

LTE B7							
Sensor off--Ant0				Maximum Output Power (dBm)			Tune-up
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			
				20775/2502.5	21100/2535	21425/2567.5	
5MHz	QPSK	1	0	22.57	22.57	22.55	24.50
		1	13	22.65	22.72	22.72	24.50
		1	24	22.53	22.61	22.64	24.50
		12	0	21.64	21.69	21.73	23.50

		12	6	21.70	21.73	21.75	23.50
		12	13	21.69	21.68	21.70	23.50
		25	0	21.68	21.69	21.71	23.50
		1	0	21.68	21.81	21.76	23.50
		1	13	21.86	21.94	21.91	23.50
		1	24	21.68	21.80	21.83	23.50
		12	0	20.58	20.69	20.71	22.50
		12	6	20.63	20.73	20.73	22.50
		12	13	20.63	20.69	20.69	22.50
	16QAM	25	0	20.60	20.70	20.69	22.50
		1	0	20.74	20.77	20.74	22.50
		1	13	20.83	20.95	20.90	22.50
		1	24	20.69	20.82	20.78	22.50
		12	0	19.61	19.71	19.74	21.50
		12	6	19.70	19.74	19.78	21.50
		12	13	19.65	19.69	19.71	21.50
		25	0	19.58	19.69	19.72	21.50
	64QAM	1	0	20.74	20.77	20.74	22.50
		1	13	20.83	20.95	20.90	22.50
		1	24	20.69	20.82	20.78	22.50
		12	0	19.61	19.71	19.74	21.50
		12	6	19.70	19.74	19.78	21.50
		12	13	19.65	19.69	19.71	21.50
		25	0	19.58	19.69	19.72	21.50
		25	0	20.60	20.70	20.69	22.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				20800/2505	21100/2535	21400/2565	
10MHz	QPSK	1	0	22.62	22.67	22.63	24.50
		1	25	22.63	22.72	22.74	24.50
		1	49	22.68	22.72	22.75	24.50
		25	0	21.63	21.72	21.70	23.50
		25	13	21.76	21.76	21.77	23.50
		25	25	21.75	21.72	21.77	23.50
		50	0	21.71	21.75	21.74	23.50
	16QAM	1	0	21.80	21.86	21.81	23.50
		1	25	21.85	21.91	21.95	23.50
		1	49	21.87	21.90	21.96	23.50
		25	0	20.58	20.73	20.69	22.50
		25	13	20.67	20.78	20.76	22.50
		25	25	20.72	20.74	20.75	22.50
		50	0	20.66	20.74	20.72	22.50
	64QAM	1	0	20.75	20.81	20.75	22.50
		1	25	20.76	20.85	20.84	22.50
		1	49	20.79	20.84	20.90	22.50
		25	0	19.60	19.74	19.69	21.50
		25	13	19.71	19.76	19.81	21.50
		25	25	19.63	19.64	19.67	21.50
		50	0	19.55	19.60	19.61	21.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				20825/2507.5	21100/2535	21375/2562.5	
15MHz	QPSK	1	0	22.57	22.60	22.57	24.50

		1	38	22.73	22.74	22.75	24.50
		1	74	22.68	22.65	22.71	24.50
		36	0	21.63	21.67	21.64	23.50
		36	18	21.70	21.75	21.75	23.50
		36	39	21.76	21.71	21.75	23.50
		75	0	21.69	21.72	21.71	23.50
		1	0	21.73	21.82	21.76	23.50
	16QAM	1	38	21.91	21.97	21.94	23.50
		1	74	21.84	21.82	21.92	23.50
		36	0	20.56	20.69	20.64	22.50
		36	18	20.69	20.74	20.74	22.50
		36	39	20.72	20.71	20.75	22.50
		75	0	20.65	20.73	20.71	22.50
	64QAM	1	0	20.74	20.81	20.70	22.50
		1	38	20.85	20.95	20.91	22.50
		1	74	20.85	20.88	20.81	22.50
		36	0	19.57	19.74	19.65	21.50
		36	18	19.72	19.77	19.78	21.50
		36	39	19.62	19.63	19.69	21.50
		75	0	19.54	19.60	19.57	21.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				20850/2510	21100/2535	21350/2560	
20MHz	QPSK	1	0	22.61	22.65	22.57	24.50
		1	50	22.89	22.91	22.81	24.50
		1	99	22.77	22.78	22.77	24.50
		50	0	21.70	21.86	21.76	23.50
		50	25	21.90	21.93	21.94	23.50
		50	50	21.89	21.86	21.90	23.50
		100	0	21.72	21.83	21.79	23.50
	16QAM	1	0	21.77	21.84	21.72	23.50
		1	50	22.07	22.12	22.00	23.50
		1	99	21.96	21.94	21.95	23.50
		50	0	20.67	20.83	20.69	22.50
		50	25	20.86	20.91	20.90	22.50
		50	50	20.85	20.83	20.85	22.50
		100	0	20.71	20.82	20.77	22.50
	64QAM	1	0	20.64	20.79	20.82	22.50
		1	50	20.89	21.03	21.02	22.50
		1	99	20.77	20.92	21.00	22.50
		50	0	19.68	19.82	19.72	21.50
		50	25	19.85	19.91	19.92	21.50
		50	50	19.85	19.84	19.90	21.50
		100	0	19.70	19.83	19.77	21.50

LTE B7							
Sensor on--Ant0				Maximum Output Power (dBm)			Tune-up
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			
				20775/2502.5	21100/2535	21425/2567.5	
5MHz	QPSK	1	0	16.05	16.25	16.32	17.50
		1	13	16.51	16.53	16.42	17.50
		1	24	16.54	16.32	16.31	17.50
		12	0	16.43	16.24	16.36	17.50
		12	6	16.43	16.25	16.45	17.50
		12	13	16.55	16.69	16.59	17.50
		25	0	16.36	16.22	16.38	17.50
	16QAM	1	0	16.22	16.65	16.22	17.50
		1	13	16.82	16.88	16.77	17.50
		1	24	16.74	16.80	16.33	17.50
		12	0	16.48	16.52	16.23	17.50
		12	6	16.48	16.63	16.31	17.50
		12	13	16.57	16.56	16.46	17.50
		25	0	16.21	16.39	16.30	17.50
	64QAM	1	0	16.50	16.47	16.27	17.50
		1	13	16.88	16.48	16.65	17.50
		1	24	16.67	16.40	16.31	17.50
		12	0	16.28	16.60	16.31	17.50
		12	6	16.81	16.64	16.24	17.50
		12	13	16.55	16.55	16.49	17.50
		25	0	16.71	16.18	16.32	17.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				20800/2505	21100/2535	21400/2565	
10MHz	QPSK	1	0	16.17	16.33	16.40	17.50
		1	25	16.37	16.45	16.64	17.50
		1	49	16.64	16.20	16.31	17.50
		25	0	16.41	16.50	16.32	17.50
		25	13	16.51	16.75	16.59	17.50
		25	25	16.83	16.63	16.37	17.50
		50	0	16.40	16.62	16.32	17.50
	16QAM	1	0	16.58	16.53	16.32	17.50
		1	25	16.62	16.66	16.51	17.50
		1	49	16.80	16.48	16.63	17.50
		25	0	16.34	16.40	16.23	17.50
		25	13	16.40	16.65	16.25	17.50
		25	25	16.57	16.52	16.60	17.50
		50	0	16.27	16.41	16.50	17.50
	64QAM	1	0	16.54	16.41	16.27	17.50
		1	25	16.94	16.46	16.43	17.50

		1	49	16.77	16.36	16.21	17.50
		25	0	16.36	16.30	16.25	17.50
		25	13	16.63	16.56	16.64	17.50
		25	25	16.53	16.61	16.65	17.50
		50	0	16.27	16.60	16.36	17.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				20825/2507.5	21100/2535	21375/2562.5	
15MHz	QPSK	1	0	16.41	16.59	16.36	17.50
		1	38	16.63	16.45	16.56	17.50
		1	74	16.58	16.42	16.31	17.50
		36	0	16.43	16.48	16.28	17.50
		36	18	16.65	16.53	16.51	17.50
		36	39	16.55	16.43	16.41	17.50
		75	0	16.46	16.62	16.56	17.50
	16QAM	1	0	16.42	16.53	16.28	17.50
		1	38	16.94	16.88	16.63	17.50
		1	74	16.56	16.52	16.57	17.50
		36	0	16.50	16.54	16.15	17.50
		36	18	16.48	16.55	16.61	17.50
		36	39	16.43	16.38	16.34	17.50
		75	0	16.55	16.43	16.28	17.50
	64QAM	1	0	16.56	16.57	16.17	17.50
		1	38	16.80	16.66	16.35	17.50
		1	74	16.83	16.64	16.53	17.50
		36	0	16.44	16.60	16.25	17.50
		36	18	16.69	16.42	16.60	17.50
		36	39	16.67	16.55	16.43	17.50
		75	0	16.37	16.50	16.24	17.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				20850/2510	21100/2535	21350/2560	
20MHz	QPSK	1	0	16.23	16.41	16.30	17.50
		1	50	16.69	16.67	16.46	17.50
		1	99	16.46	16.38	16.35	17.50
		50	0	16.35	16.48	16.34	17.50
		50	25	16.55	16.75	16.65	17.50
		50	50	16.77	16.51	16.51	17.50
		100	0	16.46	16.46	16.38	17.50
	16QAM	1	0	16.48	16.59	16.38	17.50
		1	50	16.78	16.78	16.63	17.50
		1	99	16.68	16.64	16.59	17.50
		50	0	16.32	16.42	16.23	17.50
		50	25	16.54	16.51	16.43	17.50
		50	50	16.55	16.44	16.46	17.50

		100	0	16.39	16.39	16.30	17.50
	64QAM	1	0	16.44	16.41	16.13	17.50
		1	50	16.78	16.60	16.37	17.50
		1	99	16.69	16.46	16.37	17.50
		50	0	16.34	16.44	16.27	17.50
		50	25	16.55	16.50	16.48	17.50
		50	50	16.57	16.43	16.45	17.50
		100	0	16.41	16.44	16.30	17.50

LTE B12							
Sensor off--Ant0				Maximum Output Power (dBm)			Tune-up
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			
				23017/699.7	23095/707.5	23173/715.3	
1.4MHz	QPSK	1	0	23.21	23.13	23.14	25.00
		1	2	23.29	23.17	23.22	25.00
		1	5	23.23	23.13	23.20	25.00
		3	0	23.30	23.22	23.26	25.00
		3	2	23.31	23.25	23.29	25.00
		3	3	23.36	23.24	23.25	25.00
		6	0	22.43	22.36	22.38	24.00
	16QAM	1	0	22.49	22.42	22.38	24.00
		1	2	22.59	22.45	22.49	24.00
		1	5	22.51	22.40	22.44	24.00
		3	0	22.31	22.28	22.29	24.00
		3	2	22.33	22.31	22.29	24.00
		3	3	22.35	22.33	22.27	24.00
		6	0	21.49	21.47	21.45	23.00
	64QAM	1	0	21.50	21.50	21.42	23.00
		1	2	21.58	21.54	21.51	23.00
		1	5	21.54	21.52	21.46	23.00
		3	0	21.38	21.47	21.50	23.00
		3	2	21.37	21.48	21.48	23.00
		3	3	21.38	21.49	21.48	23.00
		6	0	20.45	20.39	20.41	22.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				23025/700.5	23095/707.5	23165/714.5	
3MHz	QPSK	1	0	23.10	23.02	23.08	25.00
		1	7	23.24	23.12	23.13	25.00
		1	14	23.13	23.02	23.06	25.00
		8	0	22.33	22.22	22.28	24.00
		8	4	22.43	22.31	22.36	24.00
		8	7	22.41	22.25	22.32	24.00
		15	0	22.35	22.26	22.29	24.00

	16QAM	1	0	22.41	22.30	22.30	24.00
		1	7	22.51	22.41	22.38	24.00
		1	14	22.44	22.33	22.34	24.00
		8	0	21.38	21.33	21.35	23.00
		8	4	21.50	21.40	21.39	23.00
		8	7	21.49	21.34	21.39	23.00
		15	0	21.35	21.27	21.27	23.00
	64QAM	1	0	21.38	21.40	21.30	23.00
		1	7	21.55	21.47	21.41	23.00
		1	14	21.48	21.41	21.31	23.00
		8	0	20.37	20.30	20.34	22.00
		8	4	20.53	20.39	20.38	22.00
		8	7	20.47	20.35	20.35	22.00
		15	0	20.39	20.27	20.32	22.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				23035/701.5	23095/707.5	23155/713.5	
5MHz	QPSK	1	0	23.30	23.22	23.21	25.00
		1	13	23.51	23.38	23.40	25.00
		1	24	23.25	23.26	23.32	25.00
		12	0	22.37	22.17	22.38	24.00
		12	6	22.48	22.41	22.41	24.00
		12	13	22.40	22.28	22.41	24.00
		25	0	22.40	22.22	22.40	24.00
	16QAM	1	0	22.59	22.46	22.46	24.00
		1	13	22.81	22.60	22.68	24.00
		1	24	22.58	22.50	22.60	24.00
		12	0	21.43	21.19	21.36	23.00
		12	6	21.52	21.43	21.38	23.00
		12	13	21.39	21.33	21.39	23.00
		25	0	21.44	21.26	21.42	23.00
	64QAM	1	0	21.51	21.47	21.46	23.00
		1	13	21.72	21.62	21.59	23.00
		1	24	21.51	21.52	21.53	23.00
		12	0	20.44	20.22	20.43	22.00
		12	6	20.57	20.47	20.47	22.00
		12	13	20.46	20.35	20.45	22.00
		25	0	20.45	20.27	20.42	22.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				23060/704	23095/707.5	23130/711	
10MHz	QPSK	1	0	23.69	23.71	23.67	25.00
		1	25	23.71	23.74	23.73	25.00
		1	49	23.74	23.73	23.72	25.00
		25	0	22.63	22.56	22.71	24.00

		25	13	22.76	22.69	22.72	24.00
		25	25	22.87	22.53	22.65	24.00
		50	0	22.83	22.51	22.74	24.00
	16QAM	1	0	23.00	22.99	22.99	24.00
		1	25	22.94	23.02	23.02	24.00
		1	49	22.96	23.00	23.03	24.00
		25	0	21.63	21.61	21.69	23.00
		25	13	21.76	21.72	21.71	23.00
		25	25	21.90	21.57	21.66	23.00
		50	0	21.80	21.51	21.73	23.00
	64QAM	1	0	21.83	21.86	21.93	23.00
		1	25	21.86	21.95	21.96	23.00
		1	49	21.89	21.96	22.00	23.00
		25	0	20.70	20.66	20.72	22.00
25		13	20.78	20.74	20.80	22.00	
25		25	20.95	20.58	20.69	22.00	
50		0	20.86	20.52	20.71	22.00	
LTE B12							
Sensor on--Ant0				Maximum Output Power (dBm)			Tune-up
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			
				23017/699.7	23095/707.5	23173/715.3	
1.4MHz	QPSK	1	0	20.39	20.54	20.45	21.00
		1	2	20.10	20.30	19.89	21.00
		1	5	20.17	19.77	20.40	21.00
		3	0	20.03	19.81	20.09	21.00
		3	2	20.01	20.05	19.80	21.00
		3	3	20.18	20.01	20.40	21.00
		6	0	20.71	19.84	20.13	21.00
	16QAM	1	0	20.61	20.41	20.25	21.00
		1	2	20.69	20.89	20.85	21.00
		1	5	20.30	20.14	20.06	21.00
		3	0	19.74	20.16	19.92	21.00
		3	2	20.21	19.99	20.31	21.00
		3	3	19.88	19.52	19.90	21.00
		6	0	19.97	20.11	19.75	21.00
	64QAM	1	0	20.33	20.61	20.29	21.00
		1	2	20.82	20.82	20.60	21.00
		1	5	20.61	20.67	20.95	21.00
		3	0	20.13	19.93	19.89	21.00
		3	2	20.47	20.05	20.03	21.00
		3	3	19.81	19.85	20.33	21.00
		6	0	19.97	19.77	19.59	21.00
Bandwidth	Modulation	RB	Offset	Channel/Frequency(MHz)			Tune-up

		Allocation		23025/700.5	23095/707.5	23165/714.5	
3MHz	QPSK	1	0	20.01	20.14	19.95	21.00
		1	7	20.12	20.22	20.39	21.00
		1	14	20.37	20.05	20.06	21.00
		8	0	20.13	20.11	20.13	21.00
		8	4	20.27	19.91	20.26	21.00
		8	7	20.44	19.71	20.14	21.00
		15	0	20.45	19.78	20.37	21.00
	16QAM	1	0	20.65	20.21	20.47	21.00
		1	7	20.49	20.49	20.73	21.00
		1	14	20.06	20.22	20.38	21.00
		8	0	20.12	20.16	20.12	21.00
		8	4	20.15	20.25	20.23	21.00
		8	7	19.72	19.74	19.72	21.00
		15	0	19.75	20.23	19.89	21.00
	64QAM	1	0	20.45	20.65	20.73	21.00
		1	7	20.74	20.38	20.72	21.00
		1	14	20.65	20.65	20.61	21.00
		8	0	19.85	19.89	19.81	21.00
		8	4	20.19	20.31	20.27	21.00
		8	7	20.03	20.13	20.41	21.00
		15	0	20.13	19.59	19.73	21.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				23035/701.5	23095/707.5	23155/713.5	
5MHz	QPSK	1	0	20.11	20.22	19.97	21.00
		1	13	20.14	20.22	20.27	21.00
		1	24	20.29	20.11	20.18	21.00
		12	0	20.21	20.07	19.93	21.00
		12	6	20.47	19.77	20.20	21.00
		12	13	20.38	20.07	20.08	21.00
		25	0	20.39	19.82	20.23	21.00
	16QAM	1	0	20.51	20.15	20.49	21.00
		1	13	20.71	20.67	20.53	21.00
		1	24	19.98	20.28	20.16	21.00
		12	0	20.38	20.10	20.14	21.00
		12	6	20.09	20.19	20.17	21.00
		12	13	19.68	19.86	19.94	21.00
		25	0	19.99	20.13	19.79	21.00
	64QAM	1	0	20.57	20.63	20.59	21.00
		1	13	20.68	20.50	20.66	21.00
		1	24	20.83	20.53	20.69	21.00
		12	0	19.71	19.99	20.05	21.00
		12	6	20.25	20.17	20.29	21.00

		12	13	20.01	20.19	20.31	21.00
		25	0	20.23	19.73	19.77	21.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				23060/704	23095/707.5	23130/711	
10MHz	QPSK	1	0	20.11	20.06	20.01	21.00
		1	25	20.10	20.14	20.19	21.00
		1	49	20.13	20.11	20.02	21.00
		25	0	19.95	19.93	19.99	21.00
		25	13	20.13	19.99	20.10	21.00
		25	25	20.22	19.97	19.96	21.00
		50	0	20.23	19.90	20.07	21.00
	16QAM	1	0	20.37	20.29	20.17	21.00
		1	25	20.67	20.63	20.69	21.00
		1	49	20.08	20.18	20.10	21.00
		25	0	20.06	19.88	19.98	21.00
		25	13	20.01	20.05	20.15	21.00
		25	25	19.84	19.90	19.84	21.00
		50	0	19.85	19.85	19.79	21.00
	64QAM	1	0	20.43	20.43	20.59	21.00
		1	25	20.52	20.44	20.40	21.00
		1	49	20.69	20.55	20.63	21.00
		25	0	19.93	19.93	19.85	21.00
		25	13	20.29	20.13	20.17	21.00
		25	25	19.99	20.03	20.13	21.00
		50	0	20.03	19.85	19.85	21.00

LTE B13							
Sensor off--Ant0				Maximum Output Power (dBm)			Tune-up
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			
				23205/779.5	23230/782	23255/784.5	
5MHz	QPSK	1	0	23.34	23.29	23.29	25.00
		1	13	23.47	23.47	23.47	25.00
		1	24	23.33	23.32	23.34	25.00
		12	0	22.39	22.38	22.34	24.00
		12	6	22.48	22.44	22.45	24.00
		12	13	22.34	22.47	22.46	24.00
		25	0	22.42	22.40	22.39	24.00
	16QAM	1	0	22.50	22.52	22.57	24.00
		1	13	22.64	22.74	22.70	24.00
		1	24	22.54	22.63	22.58	24.00
		12	0	21.38	21.38	21.36	23.00
		12	6	21.44	21.45	21.44	23.00
		12	13	21.36	21.40	21.45	23.00

		25	0	21.41	21.43	21.45	23.00
	64QAM	1	0	21.43	21.40	21.46	23.00
		1	13	21.59	21.60	21.65	23.00
		1	24	21.48	21.46	21.52	23.00
		12	0	20.47	20.41	20.36	22.00
		12	6	20.48	20.48	20.53	22.00
		12	13	20.39	20.45	20.54	22.00
		25	0	20.43	20.44	20.42	22.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				/	23230/782	/	
10MHz	QPSK	1	0	/	23.19	/	25.00
		1	25	/	23.30	/	25.00
		1	49	/	23.25	/	25.00
		25	0	/	22.29	/	24.00
		25	13	/	22.29	/	24.00
		25	25	/	22.36	/	24.00
		50	0	/	22.32	/	24.00
	16QAM	1	0	/	22.38	/	24.00
		1	25	/	22.51	/	24.00
		1	49	/	22.53	/	24.00
		25	0	/	21.29	/	23.00
		25	13	/	21.31	/	23.00
		25	25	/	21.31	/	23.00
		50	0	/	21.30	/	23.00
	64QAM	1	0	/	21.38	/	23.00
		1	25	/	21.50	/	23.00
		1	49	/	21.46	/	23.00
		25	0	/	20.27	/	22.00
		25	13	/	20.30	/	22.00
		25	25	/	20.35	/	22.00
		50	0	/	20.31	/	22.00
LTE B13							
Sensor on--Ant0				Maximum Output Power (dBm)			Tune-up
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			
				23205/779.5	23230/782	23255/784.5	
5MHz	QPSK	1	0	20.51	20.53	20.49	21.50
		1	13	20.70	20.76	20.80	21.50
		1	24	20.53	20.67	20.59	21.50
		12	0	20.49	20.47	20.65	21.50
		12	6	20.70	20.56	20.70	21.50
		12	13	20.81	20.55	20.65	21.50
		25	0	20.69	20.63	20.51	21.50
	16QAM	1	0	20.53	20.61	20.61	21.50

		1	13	20.86	20.96	20.84	21.50
		1	24	20.65	20.65	20.81	21.50
		12	0	20.48	20.70	20.66	21.50
		12	6	20.73	20.71	20.59	21.50
		12	13	20.67	20.63	20.45	21.50
		25	0	20.53	20.37	20.65	21.50
	64QAM	1	0	20.42	20.28	20.24	21.50
		1	13	20.52	20.66	20.62	21.50
		1	24	20.80	20.82	21.00	21.50
		12	0	20.65	20.53	20.77	21.50
		12	6	20.77	20.61	20.73	21.50
		12	13	20.64	20.84	20.74	21.50
		25	0	20.56	20.72	20.74	21.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				/	23230/782	/	
10MHz	QPSK	1	0	/	20.49	/	21.50
		1	25	/	20.70	/	21.50
		1	49	/	20.59	/	21.50
		25	0	/	20.57	/	21.50
		25	13	/	20.60	/	21.50
		25	25	/	20.71	/	21.50
		50	0	/	20.59	/	21.50
	16QAM	1	0	/	20.65	/	21.50
		1	25	/	20.96	/	21.50
		1	49	/	20.83	/	21.50
		25	0	/	20.60	/	21.50
		25	13	/	20.63	/	21.50
		25	25	/	20.65	/	21.50
		50	0	/	20.57	/	21.50
	64QAM	1	0	/	20.34	/	21.50
		1	25	/	20.66	/	21.50
		1	49	/	20.96	/	21.50
		25	0	/	20.67	/	21.50
		25	13	/	20.71	/	21.50
		25	25	/	20.74	/	21.50
		50	0	/	20.64	/	21.50

LTE B17							
Sensor off--Ant0				Maximum Output Power (dBm)			Tune-up
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			
				23755/706.5	23790/710	23825/713.5	
5MHz	QPSK	1	0	23.28	23.28	23.28	25.00
		1	13	23.42	23.40	23.45	25.00

		1	24	23.30	23.30	23.33	25.00	
		12	0	22.21	22.37	22.36	24.00	
		12	6	22.41	22.36	22.44	24.00	
		12	13	22.42	22.28	22.42	24.00	
		25	0	22.32	22.33	22.38	24.00	
		16QAM	1	0	22.61	22.62	22.59	24.00
			1	13	22.73	22.71	22.77	24.00
			1	24	22.62	22.62	22.71	24.00
			12	0	21.20	21.40	21.34	23.00
			12	6	21.41	21.38	21.43	23.00
			12	13	21.39	21.28	21.38	23.00
			25	0	21.37	21.35	21.43	23.00
		64QAM	1	0	21.45	21.46	21.46	23.00
			1	13	21.60	21.60	21.61	23.00
			1	24	21.55	21.51	21.50	23.00
			12	0	20.25	20.44	20.39	22.00
			12	6	20.45	20.43	20.48	22.00
			12	13	20.44	20.35	20.47	22.00
			25	0	20.35	20.41	20.44	22.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up	
				23780/709	23790/710	23800/711		
10MHz	QPSK	1	0	23.25	23.20	23.24	25.00	
		1	25	23.32	23.32	23.28	25.00	
		1	49	23.31	23.35	23.35	25.00	
		25	0	22.05	22.11	22.32	24.00	
		25	13	22.27	22.28	22.35	24.00	
		25	25	22.15	22.15	22.24	24.00	
		50	0	22.09	22.18	22.30	24.00	
	16QAM	1	0	22.51	22.47	22.53	24.00	
		1	25	22.60	22.61	22.61	24.00	
		1	49	22.56	22.63	22.63	24.00	
		25	0	21.04	21.16	21.31	23.00	
		25	13	21.30	21.33	21.33	23.00	
		25	25	21.17	21.17	21.26	23.00	
		50	0	21.12	21.19	21.29	23.00	
	64QAM	1	0	21.44	21.49	21.47	23.00	
		1	25	21.55	21.59	21.59	23.00	
		1	49	21.53	21.59	21.58	23.00	
		25	0	20.09	20.19	20.31	22.00	
		25	13	20.35	20.31	20.38	22.00	
		25	25	20.20	20.20	20.29	22.00	
		50	0	20.13	20.18	20.29	22.00	
LTE B17								

Sensor on--Ant0				Maximum Output Power (dBm)			Tune-up
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			
				23755/706.5	23790/710	23825/713.5	
5MHz	QPSK	1	0	19.89	20.07	19.87	21.00
		1	13	19.85	20.19	19.75	21.00
		1	24	20.09	19.85	20.21	21.00
		12	0	20.07	19.73	20.06	21.00
		12	6	19.46	19.66	19.77	21.00
		12	13	20.12	20.12	20.23	21.00
		25	0	19.53	19.88	20.03	21.00
	16QAM	1	0	19.59	19.80	20.01	21.00
		1	13	20.06	20.16	19.64	21.00
		1	24	20.33	20.17	20.11	21.00
		12	0	20.45	20.75	20.27	21.00
		12	6	19.65	19.85	19.87	21.00
		12	13	20.14	19.84	19.90	21.00
		25	0	19.56	19.52	19.66	21.00
	64QAM	1	0	19.57	19.95	20.25	21.00
		1	13	19.69	20.23	20.29	21.00
		1	24	19.94	20.20	20.02	21.00
		12	0	20.46	20.32	20.22	21.00
		12	6	19.77	19.81	19.61	21.00
		12	13	20.03	20.01	19.95	21.00
		25	0	19.81	20.13	19.93	21.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				23780/709	23790/710	23800/711	
10MHz	QPSK	1	0	20.07	20.05	20.07	21.00
		1	25	20.05	20.29	20.15	21.00
		1	49	20.17	20.11	20.12	21.00
		25	0	19.78	19.94	20.07	21.00
		25	13	20.08	20.14	20.05	21.00
		25	25	20.03	19.98	19.99	21.00
		50	0	20.01	19.96	20.05	21.00
	16QAM	1	0	20.10	20.20	20.04	21.00
		1	25	20.47	20.35	20.39	21.00
		1	49	20.71	20.69	20.57	21.00
		25	0	19.79	19.89	19.77	21.00
		25	13	20.14	20.06	20.00	21.00
		25	25	19.90	20.04	20.04	21.00
		50	0	19.79	19.95	20.01	21.00
	64QAM	1	0	20.13	20.23	20.23	21.00
		1	25	20.34	20.24	20.10	21.00
		1	49	20.60	20.46	20.30	21.00

		25	0	19.81	19.95	19.75	21.00
		25	13	20.19	20.11	19.97	21.00
		25	25	20.17	20.03	19.91	21.00
		50	0	20.02	19.94	19.74	21.00

LTE B26							
Sensor off--Ant0				Maximum Output Power (dBm)			Tune-up
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			
				26697/814.7	26740/819	26783/823.3	
1.4MHz	QPSK	1	0	23.18	23.17	23.25	25.00
		1	2	23.27	23.22	23.31	25.00
		1	5	23.20	23.16	23.23	25.00
		3	0	23.33	23.29	23.38	25.00
		3	2	23.34	23.29	23.36	25.00
		3	3	23.31	23.30	23.35	25.00
		6	0	22.42	22.40	22.44	24.00
	16QAM	1	0	22.41	22.40	22.49	24.00
		1	2	22.46	22.45	22.44	24.00
		1	5	22.43	22.40	22.47	24.00
		3	0	22.27	22.25	22.36	24.00
		3	2	22.28	22.29	22.37	24.00
		3	3	22.24	22.29	22.36	24.00
		6	0	21.49	21.47	21.36	23.00
	64QAM	1	0	21.46	21.49	21.49	23.00
		1	2	21.34	21.38	21.36	23.00
		1	5	21.46	21.48	21.46	23.00
		3	0	21.36	21.50	21.37	23.00
		3	2	21.32	21.30	21.39	23.00
		3	3	21.49	21.50	21.37	23.00
		6	0	20.42	20.44	20.48	22.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				26705/815.5	26740/819	26775/822.5	
3MHz	QPSK	1	0	23.09	23.07	23.15	25.00
		1	7	23.21	23.18	23.28	25.00
		1	14	23.10	23.05	23.14	25.00
		8	0	22.28	22.28	22.36	24.00
		8	4	22.38	22.35	22.44	24.00
		8	7	22.34	22.33	22.41	24.00
		15	0	22.33	22.31	22.40	24.00
	16QAM	1	0	22.27	22.27	22.34	24.00
		1	7	22.36	22.34	22.48	24.00
		1	14	22.26	22.23	22.30	24.00
		8	0	21.31	21.37	21.43	23.00

		8	4	21.40	21.39	21.48	23.00
		8	7	21.37	21.33	21.44	23.00
		15	0	21.30	21.30	21.40	23.00
	64QAM	1	0	21.35	21.38	21.44	23.00
		1	7	21.42	21.47	21.55	23.00
		1	14	21.30	21.38	21.38	23.00
		8	0	20.34	20.38	20.45	22.00
		8	4	20.42	20.43	20.48	22.00
		8	7	20.41	20.39	20.43	22.00
		15	0	20.32	20.29	20.39	22.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				26715/816.5	26740/819	26765/821.5	
5MHz	QPSK	1	0	23.31	23.26	23.37	25.00
		1	13	23.42	23.41	23.50	25.00
		1	24	23.34	23.30	23.38	25.00
		12	0	22.30	22.34	22.48	24.00
		12	6	22.45	22.45	22.50	24.00
		12	13	22.42	22.37	22.42	24.00
		25	0	22.38	22.40	22.51	24.00
	16QAM	1	0	22.50	22.52	22.59	24.00
		1	13	22.62	22.66	22.77	24.00
		1	24	22.52	22.50	22.61	24.00
		12	0	21.25	21.33	21.47	23.00
		12	6	21.41	21.42	21.52	23.00
		12	13	21.38	21.34	21.46	23.00
		25	0	21.35	21.40	21.51	23.00
	64QAM	1	0	21.49	21.45	21.50	23.00
		1	13	21.55	21.64	21.63	23.00
		1	24	21.53	21.46	21.52	23.00
		12	0	20.36	20.39	20.52	22.00
		12	6	20.50	20.50	20.57	22.00
		12	13	20.46	20.42	20.45	22.00
		25	0	20.34	20.41	20.53	22.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				/	26740/819	/	
10MHz	QPSK	1	0	/	23.56	/	25.00
		1	25	/	23.61	/	25.00
		1	49	/	23.58	/	25.00
		25	0	/	22.54	/	24.00
		25	13	/	22.66	/	24.00
		25	25	/	22.60	/	24.00
		50	0	/	22.59	/	24.00
	16QAM	1	0	/	22.77	/	24.00

		1	25	/	22.85	/	24.00
		1	49	/	22.80	/	24.00
		25	0	/	21.55	/	23.00
		25	13	/	21.66	/	23.00
		25	25	/	21.59	/	23.00
		50	0	/	21.53	/	23.00
	64QAM	1	0	/	21.68	/	23.00
		1	25	/	21.77	/	23.00
		1	49	/	21.71	/	23.00
		25	0	/	20.55	/	22.00
		25	13	/	20.70	/	22.00
		25	25	/	20.63	/	22.00
		50	0	/	20.59	/	22.00

LTE B26							
Sensor off--Ant0				Maximum Output Power (dBm)			Tune-up
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			
				26797/824.7	26915/836.5	27033/848.3	
1.4MHz	QPSK	1	0	23.24	23.46	23.42	25.00
		1	2	23.59	23.17	23.45	25.00
		1	5	23.32	23.06	23.54	25.00
		3	0	23.18	23.10	23.22	25.00
		3	2	23.42	23.20	23.30	25.00
		3	3	23.16	23.50	23.20	25.00
		6	0	22.25	22.47	22.71	24.00
	16QAM	1	0	22.49	22.41	22.57	24.00
		1	2	22.93	22.69	22.35	24.00
		1	5	22.66	22.50	22.36	24.00
		3	0	22.03	22.03	22.21	24.00
		3	2	22.26	22.44	22.26	24.00
		3	3	22.05	22.17	22.03	24.00
		6	0	21.47	21.25	21.37	23.00
	64QAM	1	0	21.68	21.22	21.70	23.00
		1	2	21.55	21.45	21.55	23.00
		1	5	21.09	21.87	21.11	23.00
		3	0	21.09	21.47	21.29	23.00
		3	2	21.28	21.50	21.10	23.00
		3	3	21.45	21.11	21.53	23.00
		6	0	20.07	20.41	20.31	22.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				26915/836.5	26915/836.5	27025/847.5	
3MHz	QPSK	1	0	23.16	23.14	23.36	25.00
		1	7	23.29	23.29	23.49	25.00

		1	14	23.24	23.03	23.30	25.00
		8	0	22.50	22.13	22.14	24.00
		8	4	22.40	22.26	22.62	24.00
		8	7	22.26	22.62	22.46	24.00
		15	0	22.11	22.25	22.51	24.00
	16QAM	1	0	22.29	22.27	22.39	24.00
		1	7	22.71	22.55	22.39	24.00
		1	14	22.54	22.44	22.46	24.00
		8	0	21.15	21.13	21.33	23.00
		8	4	21.32	21.26	21.38	23.00
		8	7	21.21	21.21	21.05	23.00
		15	0	21.47	21.25	21.21	23.00
	64QAM	1	0	21.32	21.28	21.58	23.00
		1	7	21.31	21.49	21.55	23.00
		1	14	21.25	21.57	21.25	23.00
		8	0	20.07	20.33	20.51	22.00
		8	4	20.34	20.60	20.24	22.00
		8	7	20.49	20.15	20.35	22.00
		15	0	20.11	20.33	20.15	22.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				26815/826.5	26915/836.5	27015/846.5	
5MHz	QPSK	1	0	23.08	23.40	23.42	25.00
		1	13	23.43	23.21	23.47	25.00
		1	24	23.10	23.05	23.30	25.00
		12	0	22.30	22.04	22.20	24.00
		12	6	22.20	22.36	22.42	24.00
		12	13	22.26	22.64	22.48	24.00
		25	0	22.11	22.11	22.29	24.00
	16QAM	1	0	22.07	22.47	22.27	24.00
		1	13	22.81	22.53	22.45	24.00
		1	24	22.70	22.46	22.50	24.00
		12	0	21.19	21.11	21.17	23.00
		12	6	21.18	21.58	21.18	23.00
		12	13	21.09	21.07	21.01	23.00
		25	0	21.31	21.13	21.13	23.00
	64QAM	1	0	21.32	21.24	21.38	23.00
		1	13	21.41	21.59	21.61	23.00
		1	24	21.03	21.67	21.07	23.00
		12	0	20.01	20.43	20.53	22.00
		12	6	20.16	20.40	20.12	22.00
		12	13	20.39	20.09	20.65	22.00
		25	0	20.11	20.43	20.13	22.00
Bandwidth	Modulation	RB	Offset	Channel/Frequency(MHz)			Tune-up

		Allocation		26840/829	26915/836.5	26990/844	
10MHz	QPSK	1	0	23.10	23.34	23.42	25.00
		1	25	23.33	23.11	23.41	25.00
		1	49	23.26	23.10	23.42	25.00
		25	0	22.34	22.16	22.24	24.00
		25	13	22.44	22.38	22.62	24.00
		25	25	22.20	22.44	22.46	24.00
		50	0	22.29	22.23	22.45	24.00
	16QAM	1	0	22.17	22.47	22.39	24.00
		1	25	22.61	22.57	22.45	24.00
		1	49	22.76	22.56	22.42	24.00
		25	0	21.09	21.19	21.33	23.00
		25	13	21.36	21.24	21.46	23.00
		25	25	21.07	21.01	21.12	23.00
		50	0	21.43	21.21	21.15	23.00
	64QAM	1	0	21.38	21.20	21.40	23.00
		1	25	21.57	21.63	21.57	23.00
		1	49	21.01	21.53	21.17	23.00
		25	0	20.31	20.51	20.37	22.00
		25	13	20.32	20.44	20.14	22.00
		25	25	20.27	20.37	20.35	22.00
		50	0	20.03	20.35	20.15	22.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				26865/831.5	26915/836.5	26965/841.5	
15MHz	QPSK	1	0	23.34	23.44	23.46	25.00
		1	38	23.45	23.33	23.53	25.00
		1	74	23.46	23.25	23.44	25.00
		36	0	22.58	22.28	22.40	24.00
		36	18	22.56	22.52	22.70	24.00
		36	39	22.48	22.66	22.60	24.00
		75	0	22.39	22.43	22.59	24.00
	16QAM	1	0	22.45	22.53	22.45	24.00
		1	38	22.89	22.83	22.49	24.00
		1	74	22.80	22.72	22.62	24.00
		36	0	21.31	21.29	21.51	23.00
		36	18	21.50	21.56	21.50	23.00
		36	39	21.29	21.25	21.29	23.00
		75	0	21.51	21.41	21.41	23.00
	64QAM	1	0	21.54	21.42	21.72	23.00
		1	38	21.59	21.69	21.65	23.00
		1	74	21.29	21.77	21.35	23.00
		36	0	20.35	20.61	20.61	22.00
		36	18	20.40	20.66	20.36	22.00

		36	39	20.55	20.41	20.63	22.00
		75	0	20.23	20.53	20.33	22.00
LTE B26							
Sensor on--Ant0				Maximum Output Power (dBm)			Tune-up
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			
				26697/814.7	26740/819	26783/823.3	
1.4MHz	QPSK	1	0	21.59	21.51	21.41	22.50
		1	2	21.48	21.38	21.32	22.50
		1	5	21.61	21.53	21.59	22.50
		3	0	21.26	21.38	21.22	22.50
		3	2	21.44	21.62	21.62	22.50
		3	3	21.64	21.64	21.50	22.50
		6	0	21.71	21.73	21.57	22.50
	16QAM	1	0	21.99	21.95	21.75	22.50
		1	2	21.69	21.67	21.63	22.50
		1	5	21.75	21.63	21.67	22.50
		3	0	21.30	21.28	21.48	22.50
		3	2	21.51	21.63	21.49	22.50
		3	3	21.47	21.23	21.45	22.50
		6	0	21.32	21.24	21.20	22.50
	64QAM	1	0	21.62	21.42	21.52	22.50
		1	2	21.77	21.85	21.81	22.50
		1	5	21.80	21.76	21.76	22.50
		3	0	21.55	21.53	21.67	22.50
		3	2	21.69	21.65	21.65	22.50
		3	3	21.63	21.59	21.69	22.50
		6	0	21.29	21.43	21.37	22.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				26705/815.5	26740/819	26775/822.5	
3MHz	QPSK	1	0	21.53	21.53	21.51	22.50
		1	7	21.46	21.42	21.46	22.50
		1	14	21.81	21.45	21.77	22.50
		8	0	21.42	21.50	21.22	22.50
		8	4	21.40	21.50	21.40	22.50
		8	7	21.56	21.60	21.36	22.50
		15	0	21.49	21.83	21.55	22.50
	16QAM	1	0	21.99	21.93	21.93	22.50
		1	7	21.87	21.69	21.93	22.50
		1	14	21.73	21.67	21.79	22.50
		8	0	21.26	21.44	21.20	22.50
		8	4	21.37	21.49	21.75	22.50
		8	7	21.15	21.29	21.21	22.50
		15	0	21.12	21.34	21.34	22.50

	64QAM	1	0	21.42	21.50	21.38	22.50
		1	7	21.61	21.93	21.65	22.50
		1	14	21.76	21.48	21.60	22.50
		8	0	21.45	21.67	21.67	22.00
		8	4	21.73	21.81	21.67	22.00
		8	7	21.67	21.51	21.77	22.00
		15	0	21.23	21.37	21.47	22.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				26715/816.5	26740/819	26765/821.5	
5MHz	QPSK	1	0	21.63	21.45	21.49	22.50
		1	13	21.30	21.24	21.50	22.50
		1	24	21.61	21.71	21.61	22.50
		12	0	21.30	21.34	21.16	22.50
		12	6	21.46	21.66	21.64	22.50
		12	13	21.60	21.60	21.68	22.50
		25	0	21.57	21.55	21.73	22.50
	16QAM	1	0	21.85	21.85	21.69	22.50
		1	13	21.67	21.67	21.73	22.50
		1	24	21.67	21.57	21.59	22.50
		12	0	21.22	21.40	21.44	22.50
		12	6	21.71	21.67	21.67	22.50
		12	13	21.27	21.35	21.41	22.50
		25	0	21.32	21.46	21.20	22.50
	64QAM	1	0	21.70	21.56	21.70	22.50
		1	13	21.81	21.83	21.87	22.50
		1	24	21.58	21.80	21.68	22.50
		12	0	21.63	21.63	21.57	22.00
		12	6	21.49	21.69	21.77	22.00
		12	13	21.73	21.81	21.79	22.00
		25	0	21.35	21.25	21.31	22.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				/	26740/819	/	
10MHz	QPSK	1	0	/	21.47	/	22.50
		1	25	/	21.36	/	22.50
		1	49	/	21.61	/	22.50
		25	0	/	21.28	/	22.50
		25	13	/	21.48	/	22.50
		25	25	/	21.55	/	22.50
		50	0	/	21.67	/	22.50
	16QAM	1	0	/	21.85	/	22.50
		1	25	/	21.71	/	22.50
		1	49	/	21.59	/	22.50
		25	0	/	21.34	/	22.50

		25	13	/	21.53	/	22.50
		25	25	/	21.31	/	22.50
		50	0	/	21.30	/	22.50
	64QAM	1	0	/	21.52	/	22.50
		1	25	/	21.75	/	22.50
		1	49	/	21.66	/	22.50
		25	0	/	21.63	/	22.00
		25	13	/	21.61	/	22.00
		25	25	/	21.63	/	22.00
		50	0	/	21.33	/	22.00
LTE B26							
Sensor on--Ant0				Maximum Output Power (dBm)			Tune-up
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			
				26797/824.7	26915/836.5	27033/848.3	
1.4MHz	QPSK	1	0	21.43	21.51	21.38	22.50
		1	2	21.67	21.48	21.69	22.50
		1	5	21.47	21.55	21.48	22.50
		3	0	21.53	21.48	21.60	22.50
		3	2	21.58	21.54	21.51	22.50
		3	3	21.56	21.56	21.35	22.50
		6	0	21.45	21.65	21.62	22.50
	16QAM	1	0	21.58	21.69	21.67	22.50
		1	2	21.90	21.83	21.74	22.50
		1	5	21.85	21.81	21.87	22.50
		3	0	21.42	21.50	21.63	22.50
		3	2	21.63	21.49	21.44	22.50
		3	3	21.42	21.37	21.46	22.50
		6	0	21.56	21.52	21.51	22.50
	64QAM	1	0	21.78	21.74	21.51	22.50
		1	2	21.92	21.73	21.77	22.50
		1	5	21.79	21.74	21.68	22.50
		3	0	21.52	21.43	21.41	22.50
		3	2	21.65	21.73	21.70	22.50
		3	3	21.62	21.43	21.45	22.50
		6	0	21.36	21.47	21.43	22.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				26915/836.5	26915/836.5	27025/847.5	
3MHz	QPSK	1	0	21.25	21.35	21.20	22.50
		1	7	21.61	21.36	21.59	22.50
		1	14	21.33	21.45	21.34	22.50
		8	0	21.25	21.44	21.46	22.50
		8	4	21.58	21.34	21.51	22.50
		8	7	21.52	21.52	21.23	22.50

	16QAM	15	0	21.49	21.49	21.30	22.50
		1	0	21.66	21.59	21.77	22.50
		1	7	21.72	21.79	21.84	22.50
		1	14	21.79	21.57	21.61	22.50
		8	0	21.38	21.24	21.39	22.50
		8	4	21.51	21.33	21.42	22.50
		8	7	21.42	21.31	21.40	22.50
		15	0	21.38	21.36	21.35	22.50
	64QAM	1	0	21.62	21.48	21.37	22.50
		1	7	21.84	21.75	21.71	22.50
		1	14	21.77	21.48	21.50	22.50
		8	0	21.30	21.59	21.45	22.00
		8	4	21.35	21.63	21.40	22.00
		8	7	21.32	21.51	21.35	22.00
		15	0	21.50	21.51	21.57	22.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				26815/826.5	26915/836.5	27015/846.5	
5MHz	QPSK	1	0	21.53	21.23	21.46	22.50
		1	13	21.65	21.46	21.53	22.50
		1	24	21.45	21.33	21.44	22.50
		12	0	21.49	21.34	21.52	22.50
		12	6	21.52	21.44	21.59	22.50
		12	13	21.60	21.28	21.61	22.50
		25	0	21.45	21.37	21.40	22.50
	16QAM	1	0	21.78	21.81	21.55	22.50
		1	13	21.78	21.71	21.72	22.50
		1	24	21.67	21.87	21.61	22.50
		12	0	21.36	21.32	21.69	22.50
		12	6	21.71	21.67	21.36	22.50
		12	13	21.42	21.61	21.28	22.50
		25	0	21.62	21.40	21.33	22.50
	64QAM	1	0	21.68	21.72	21.71	22.50
		1	13	21.64	21.87	21.67	22.50
		1	24	21.73	21.68	21.66	22.50
		12	0	21.28	21.55	21.37	22.00
		12	6	21.63	21.45	21.70	22.00
		12	13	21.72	21.63	21.57	22.00
		25	0	21.52	21.47	21.65	22.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				26840/829	26915/836.5	26990/844	
10MHz	QPSK	1	0	21.35	21.29	21.48	22.50
		1	25	21.39	21.46	21.67	22.50
		1	49	21.45	21.47	21.48	22.50

		25	0	21.31	21.56	21.62	22.50
		25	13	21.62	21.70	21.53	22.50
		25	25	21.56	21.40	21.37	22.50
		50	0	21.45	21.61	21.68	22.50
	16QAM	1	0	21.80	21.79	21.59	22.50
		1	25	21.96	21.87	21.76	22.50
		1	49	21.69	21.75	21.79	22.50
		25	0	21.54	21.46	21.49	22.50
		25	13	21.41	21.65	21.64	22.50
		25	25	21.48	21.53	21.52	22.50
		50	0	21.44	21.58	21.57	22.50
		1	0	21.52	21.60	21.63	22.50
	64QAM	1	25	21.80	21.97	21.63	22.50
		1	49	21.71	21.84	21.62	22.50
		25	0	21.54	21.53	21.41	22.00
		25	13	21.51	21.65	21.46	22.00
		25	25	21.46	21.41	21.49	22.00
		50	0	21.44	21.63	21.45	22.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				26865/831.5	26915/836.5	26965/841.5	
15MHz	QPSK	1	0	21.37	21.39	21.36	22.50
		1	38	21.51	21.59	21.53	22.50
		1	74	21.47	21.45	21.44	22.50
		36	0	21.41	21.44	21.48	22.50
		36	18	21.54	21.52	21.55	22.50
		36	39	21.48	21.46	21.43	22.50
		75	0	21.45	21.51	21.50	22.50
	16QAM	1	0	21.68	21.67	21.69	22.50
		1	38	21.80	21.83	21.82	22.50
		1	74	21.77	21.73	21.75	22.50
		36	0	21.40	21.44	21.47	22.50
		36	18	21.51	21.51	21.54	22.50
		36	39	21.50	21.45	21.44	22.50
		75	0	21.46	21.48	21.47	22.50
	64QAM	1	0	21.62	21.64	21.57	22.50
		1	38	21.76	21.79	21.71	22.50
		1	74	21.67	21.68	21.62	22.50
		36	0	21.44	21.51	21.51	22.00
		36	18	21.55	21.59	21.58	22.00
		36	39	21.52	21.51	21.47	22.00
		75	0	21.44	21.49	21.49	22.00

LTE B38

Sensor off--Ant0				Maximum Output Power (dBm)			Tune-up
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			
				37775/2572.5	38000/2595	38225/2617.5	
5MHz	QPSK	1	0	22.65	22.61	22.63	24.50
		1	13	22.78	22.83	22.80	24.50
		1	24	22.63	22.65	22.66	24.50
		12	0	21.62	21.62	21.69	23.50
		12	6	21.72	21.77	21.75	23.50
		12	13	21.67	21.73	21.69	23.50
		25	0	21.65	21.71	21.70	23.50
	16QAM	1	0	21.80	21.75	21.77	23.50
		1	13	21.93	21.92	21.92	23.50
		1	24	21.77	21.83	21.82	23.50
		12	0	20.71	20.72	20.73	22.50
		12	6	20.75	20.81	20.79	22.50
		12	13	20.69	20.75	20.75	22.50
		25	0	20.73	20.77	20.79	22.50
	64QAM	1	0	20.70	20.69	20.72	22.50
		1	13	20.85	20.93	20.87	22.50
		1	24	20.69	20.71	20.71	22.50
		12	0	19.70	19.70	19.75	21.50
		12	6	19.79	19.82	19.80	21.50
		12	13	19.76	19.80	19.78	21.50
		25	0	19.73	19.79	19.80	21.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				37800/2575	38000/2595	38200/2615	
10MHz	QPSK	1	0	22.73	22.69	22.66	24.50
		1	25	22.75	22.79	22.81	24.50
		1	49	22.71	22.71	22.74	24.50
		25	0	21.64	21.64	21.66	23.50
		25	13	21.70	21.75	21.77	23.50
		25	25	21.70	21.76	21.71	23.50
		50	0	21.68	21.70	21.76	23.50
	16QAM	1	0	21.89	21.87	21.83	23.50
		1	25	21.90	21.97	21.94	23.50
		1	49	21.88	21.89	21.91	23.50
		25	0	20.69	20.69	20.71	22.50
		25	13	20.75	20.84	20.83	22.50
		25	25	20.78	20.82	20.77	22.50
		50	0	20.71	20.75	20.76	22.50
	64QAM	1	0	20.78	20.76	20.70	22.50
		1	25	20.79	20.87	20.91	22.50
		1	49	20.79	20.81	20.81	22.50

		25	0	19.76	19.76	19.76	21.50
		25	13	19.80	19.87	19.86	21.50
		25	25	19.82	19.84	19.84	21.50
		50	0	19.73	19.73	19.79	21.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				37825/2577.5	38000/2595	38175/2612.5	
15MHz	QPSK	1	0	22.68	22.64	22.61	24.50
		1	38	22.83	22.81	22.78	24.50
		1	74	22.74	22.72	22.73	24.50
		36	0	21.60	21.63	21.61	23.50
		36	18	21.69	21.72	21.74	23.50
		36	39	21.69	21.73	21.73	23.50
		75	0	21.67	21.71	21.68	23.50
	16QAM	1	0	21.84	21.80	21.75	23.50
		1	38	21.95	21.98	21.89	23.50
		1	74	21.88	21.86	21.85	23.50
		36	0	20.60	20.60	20.57	22.50
		36	18	20.71	20.73	20.70	22.50
		36	39	20.67	20.72	20.71	22.50
		75	0	20.71	20.72	20.70	22.50
	64QAM	1	0	20.74	20.69	20.67	22.50
		1	38	20.88	20.88	20.87	22.50
		1	74	20.77	20.81	20.79	22.50
		36	0	19.67	19.67	19.66	21.50
		36	18	19.75	19.77	19.73	21.50
		36	39	19.73	19.77	19.73	21.50
		75	0	19.70	19.73	19.70	21.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				37850/2580	38000/2595	38150/2610	
20MHz	QPSK	1	0	22.58	22.58	22.52	24.50
		1	50	22.80	22.81	22.76	24.50
		1	99	22.62	22.61	22.61	24.50
		50	0	21.59	21.62	21.59	23.50
		50	25	21.73	21.76	21.78	23.50
		50	50	21.79	21.79	21.74	23.50
		100	0	21.68	21.69	21.68	23.50
	16QAM	1	0	21.74	21.68	21.67	23.50
		1	50	21.96	21.96	21.89	23.50
		1	99	21.78	21.80	21.79	23.50
		50	0	20.63	20.65	20.62	22.50
		50	25	20.80	20.78	20.80	22.50
		50	50	20.79	20.82	20.76	22.50
		100	0	20.71	20.73	20.73	22.50

	64QAM	1	0	20.65	20.66	20.61	22.50
		1	50	20.84	20.91	20.78	22.50
		1	99	20.70	20.69	20.72	22.50
		50	0	19.64	19.66	19.61	21.50
		50	25	19.79	19.78	19.77	21.50
		50	50	19.79	19.82	19.77	21.50
		100	0	19.71	19.73	19.70	21.50
LTE B38							
Sensor on--Ant0				Maximum Output Power (dBm)			Tune-up
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			
				37775/2572.5	38000/2595	38225/2617.5	
5MHz	QPSK	1	0	18.71	18.80	18.63	19.50
		1	13	18.67	18.80	18.96	19.50
		1	24	18.81	18.71	18.65	19.50
		12	0	18.89	18.70	18.70	19.50
		12	6	18.86	18.83	18.82	19.50
		12	13	18.95	18.96	18.57	19.50
		25	0	18.49	18.78	18.70	19.50
	16QAM	1	0	18.60	18.50	18.52	19.50
		1	13	18.92	19.12	18.72	19.50
		1	24	18.80	18.76	18.60	19.50
		12	0	18.51	18.53	18.47	19.50
		12	6	18.85	18.71	18.91	19.50
		12	13	18.65	18.63	18.67	19.50
		25	0	18.91	18.73	18.43	19.50
	64QAM	1	0	18.28	18.46	18.46	19.50
		1	13	18.74	18.84	18.70	19.50
		1	24	18.07	18.49	18.31	19.50
		12	0	18.48	18.44	18.12	19.50
		12	6	18.53	18.55	18.77	19.50
		12	13	18.50	18.74	19.02	19.50
		25	0	18.70	18.78	18.80	2.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				37800/2575	38000/2595	38200/2615	
10MHz	QPSK	1	0	18.73	18.60	18.51	19.50
		1	25	18.81	18.56	18.70	19.50
		1	49	18.83	18.57	18.53	19.50
		25	0	18.75	18.54	18.76	19.50
		25	13	18.66	18.81	18.86	19.50
		25	25	18.77	18.72	18.53	19.50
		50	0	18.39	18.62	18.86	19.50
	16QAM	1	0	18.42	18.48	18.60	19.50
		1	25	18.70	18.82	18.66	19.50

		1	49	18.68	18.44	18.70	19.50
		25	0	18.49	18.51	18.35	19.50
		25	13	18.77	18.77	18.71	19.50
		25	25	18.57	18.57	18.53	19.50
		50	0	18.93	18.49	18.33	19.50
	64QAM	1	0	18.14	18.50	18.32	19.50
		1	25	18.62	18.80	18.42	19.50
		1	49	18.19	18.31	18.13	19.50
		25	0	18.26	18.40	18.08	19.50
		25	13	18.29	18.51	18.75	19.50
		25	25	18.56	18.48	18.74	19.50
		50	0	18.56	18.70	18.68	2.00
	64QAM	1	0	18.14	18.50	18.32	19.50
		1	25	18.62	18.80	18.42	19.50
		1	49	18.19	18.31	18.13	19.50
		25	0	18.26	18.40	18.08	19.50
		25	13	18.29	18.51	18.75	19.50
		25	25	18.56	18.48	18.74	19.50
		50	0	18.56	18.70	18.68	2.00
		50	0	18.56	18.70	18.68	2.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				37825/2577.5	38000/2595	38175/2612.5	
15MHz	QPSK	1	0	18.85	18.84	18.57	19.50
		1	38	18.81	18.90	18.74	19.50
		1	74	18.99	18.79	18.65	19.50
		36	0	18.89	18.68	18.70	19.50
		36	18	18.92	18.65	18.74	19.50
		36	39	18.87	18.80	18.59	19.50
		75	0	18.55	18.62	18.72	19.50
	16QAM	1	0	18.66	18.46	18.52	19.50
		1	38	18.70	19.00	18.90	19.50
		1	74	18.76	18.60	18.70	19.50
		36	0	18.51	18.57	18.51	19.50
		36	18	18.83	18.75	18.87	19.50
		36	39	18.83	18.63	18.61	19.50
		75	0	18.85	18.67	18.53	19.50
	64QAM	1	0	18.22	18.62	18.32	19.50
		1	38	18.48	19.00	18.60	19.50
		1	74	18.09	18.23	18.39	19.50
		36	0	18.34	18.38	18.26	19.50
		36	18	18.41	18.57	18.87	19.50
		36	39	18.52	18.84	19.04	19.50
		75	0	18.64	18.80	18.58	2.00
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				37850/2580	38000/2595	38150/2610	
20MHz	QPSK	1	0	18.63	18.64	18.59	19.50
		1	50	18.71	18.82	18.74	19.50
		1	99	18.67	18.69	18.71	19.50
		50	0	18.67	18.54	18.52	19.50
		50	25	18.68	18.63	18.70	19.50
		50	50	18.73	18.70	18.65	19.50

	16QAM	100	0	18.61	18.72	18.70	19.50
		1	0	18.50	18.68	18.68	19.50
		1	50	18.80	18.84	18.94	19.50
		1	99	18.78	18.70	18.74	19.50
		50	0	18.39	18.55	18.39	19.50
		50	25	18.59	18.67	18.75	19.50
		50	50	18.59	18.69	18.49	19.50
	64QAM	100	0	18.73	18.71	18.53	19.50
		1	0	18.24	18.36	18.24	19.50
		1	50	18.46	18.64	18.44	19.50
		1	99	18.19	18.35	18.39	19.50
		50	0	18.38	18.52	18.32	19.50
		50	25	18.51	18.65	18.57	19.50
		50	50	18.64	18.70	18.76	19.50
		100	0	18.50	18.58	18.60	2.00

LTE B41									
Sensor off--Ant0				Maximum Output Power (dBm)					Tune-up
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)					
				39675/249	40148/254	40620/25	41093/264	41565/268	
				8.5	5.8	93	0.3	7.5	
5MHz	QPSK	1	0	22.60	22.64	22.66	22.71	22.77	24.50
		1	13	22.71	22.84	22.81	22.84	22.92	24.50
		1	24	22.62	22.69	22.68	22.75	22.79	24.50
		12	0	21.64	21.69	21.73	21.74	21.84	23.50
		12	6	21.74	21.74	21.77	21.83	21.87	23.50
		12	13	21.65	21.70	21.71	21.82	21.77	23.50
		25	0	21.66	21.70	21.72	21.77	21.76	23.50
	16QAM	1	0	21.73	21.81	21.79	21.83	21.92	23.50
		1	13	21.90	21.96	21.93	22.00	22.04	23.50
		1	24	21.79	21.85	21.86	21.87	21.91	23.50
		12	0	20.66	20.72	20.72	20.77	20.85	22.50
		12	6	20.76	20.81	20.80	20.86	20.91	22.50
		12	13	20.69	20.74	20.78	20.84	20.83	22.50
		25	0	20.76	20.78	20.80	20.85	20.88	22.50
	64QAM	1	0	20.71	20.69	20.77	20.76	20.85	22.50
		1	13	20.82	20.86	20.86	20.90	20.99	22.50
		1	24	20.76	20.75	20.77	20.80	20.84	22.50
		12	0	19.69	19.73	19.75	19.79	19.86	21.50
		12	6	19.78	19.82	19.82	19.91	19.91	21.50
		12	13	19.75	19.80	19.82	19.84	19.85	21.50
		25	0	19.75	19.82	19.82	19.89	19.89	21.50
Bandwidth	Modulation	RB	Offset	Channel/Frequency(MHz)					Tune-

th	on	Allocati on	et	39700/250 1	40160/254 7	40620/25 93	41080/263 9	41540/268 5	up
10MHz	QPSK	1	0	22.66	22.76	22.70	22.80	22.84	24.50
		1	25	22.75	22.84	22.83	22.83	22.93	24.50
		1	49	22.69	22.79	22.80	22.83	22.87	24.50
		25	0	21.65	21.71	21.68	21.80	21.85	23.50
		25	13	21.71	21.80	21.78	21.84	21.85	23.50
		25	25	21.69	21.73	21.78	21.78	21.83	23.50
		50	0	21.70	21.74	21.79	21.85	21.87	23.50
	16QAM	1	0	21.80	21.92	21.85	21.96	21.99	23.50
		1	25	21.93	22.02	21.97	22.01	22.05	23.50
		1	49	21.88	21.94	21.95	21.99	22.00	23.50
		25	0	20.70	20.77	20.75	20.86	20.92	22.50
		25	13	20.79	20.85	20.86	20.89	20.95	22.50
		25	25	20.77	20.80	20.86	20.87	20.87	22.50
		50	0	20.74	20.78	20.81	20.88	20.90	22.50
	64QAM	1	0	20.79	20.80	20.81	20.88	20.91	22.50
		1	25	20.86	20.91	20.89	20.91	21.00	22.50
		1	49	20.77	20.83	20.85	20.92	20.90	22.50
		25	0	19.75	19.84	19.80	19.92	19.92	21.50
		25	13	19.80	19.89	19.89	19.91	19.96	21.50
		25	25	19.82	19.88	19.89	19.94	19.94	21.50
		50	0	19.73	19.79	19.82	19.89	19.88	21.50
Bandwid th	Modulati on	RB Allocati on	Offs et	Channel/Frequency(MHz)					Tune- up
				39725/250 3.5	40173/254 8.3	40620/25 93	41068/263 7.8	41515/268 2.5	
15MHz	QPSK	1	0	22.65	22.69	22.67	22.73	22.77	24.50
		1	38	22.77	22.88	22.83	22.87	22.89	24.50
		1	74	22.69	22.74	22.76	22.78	22.80	24.50
		36	0	21.64	21.68	21.64	21.76	21.78	23.50
		36	18	21.75	21.76	21.77	21.78	21.85	23.50
		36	39	21.66	21.71	21.73	21.77	21.77	23.50
		75	0	21.68	21.69	21.73	21.78	21.81	23.50
	16QAM	1	0	21.82	21.85	21.81	21.86	21.94	23.50
		1	38	21.94	22.01	21.97	22.03	22.04	23.50
		1	74	21.85	21.90	21.90	21.96	21.94	23.50
		36	0	20.62	20.65	20.65	20.74	20.78	22.50
		36	18	20.73	20.77	20.75	20.77	20.83	22.50
		36	39	20.66	20.71	20.74	20.80	20.78	22.50
		75	0	20.73	20.75	20.74	20.82	20.84	22.50
	64QAM	1	0	20.74	20.78	20.73	20.78	20.79	22.50
		1	38	20.88	20.92	20.89	20.95	20.92	22.50
		1	74	20.81	20.79	20.84	20.86	20.88	22.50

		36	0	19.68	19.71	19.69	19.80	19.80	21.50
		36	18	19.78	19.80	19.80	19.82	19.89	21.50
		36	39	19.73	19.77	19.79	19.80	19.80	21.50
		75	0	19.72	19.72	19.77	19.80	19.82	21.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)					Tune-up
				39750/2506	40185/2549.5	40620/2593	41055/2636.5	41490/2680	
20MHz	QPSK	1	0	22.53	22.60	22.60	22.60	22.68	24.50
		1	50	22.76	22.83	22.84	22.86	22.90	24.50
		1	99	22.59	22.70	22.69	22.67	22.69	24.50
		50	0	21.62	21.71	21.66	21.80	21.82	23.50
		50	25	21.77	21.82	21.83	21.83	21.90	23.50
		50	50	21.75	21.75	21.80	21.78	21.78	23.50
		100	0	21.70	21.72	21.75	21.80	21.82	23.50
	16QAM	1	0	21.68	21.75	21.72	21.72	21.81	23.50
		1	50	21.94	22.02	22.00	21.98	22.03	23.50
		1	99	21.78	21.84	21.81	21.84	21.84	23.50
		50	0	20.68	20.75	20.67	20.83	20.88	22.50
		50	25	20.81	20.87	20.84	20.87	20.92	22.50
		50	50	20.78	20.80	20.85	20.82	20.80	22.50
		100	0	20.71	20.74	20.78	20.84	20.84	22.50
	64QAM	1	0	20.65	20.70	20.69	20.66	20.72	22.50
		1	50	20.82	20.91	20.90	20.90	20.93	22.50
		1	99	20.67	20.73	20.76	20.76	20.75	22.50
		50	0	19.64	19.73	19.64	19.80	19.86	21.50
		50	25	19.80	19.89	19.88	19.86	19.93	21.50
		50	50	19.78	19.78	19.80	19.80	19.79	21.50
		100	0	19.72	19.73	19.79	19.82	19.89	21.50

LTE B41									
Sensor on--Ant0				Maximum Output Power (dBm)					Tune-up
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)					
				39675/249	40148/254	40620/25	41093/264	41565/268	
				8.5	5.8	93	0.3	7.5	
5MHz	QPSK	1	0	18.61	18.56	18.87	19.12	18.95	19.50
		1	13	18.80	19.13	18.80	19.03	19.08	19.50
		1	24	18.68	18.74	18.48	18.81	18.68	19.50
		12	0	18.56	18.73	18.71	18.78	18.67	19.50
		12	6	18.93	19.04	18.91	18.94	18.55	19.50
		12	13	18.92	19.20	18.95	18.62	18.95	19.50
		25	0	18.62	18.71	18.53	18.81	18.86	19.50
	16QAM	1	0	18.92	18.58	18.90	18.78	18.72	19.50
		1	13	19.06	19.44	18.88	19.10	19.28	19.50

		1	24	18.86	19.00	19.12	18.90	18.64	19.50
		12	0	18.55	18.55	18.41	18.33	18.49	19.50
		12	6	18.87	18.73	18.75	18.63	18.77	19.50
		12	13	18.70	19.30	18.74	18.82	19.24	19.50
		25	0	18.88	19.10	19.12	19.06	18.56	19.50
	64QAM	1	0	18.67	18.53	18.33	18.07	18.25	19.50
		1	13	19.05	18.83	18.67	18.63	18.21	19.50
		1	24	18.58	18.56	18.72	18.04	18.80	19.50
		12	0	18.63	18.63	18.49	18.81	18.69	19.50
		12	6	18.44	18.86	18.70	18.92	18.58	19.50
		12	13	18.85	18.57	19.07	18.69	18.85	19.50
		25	0	19.03	18.93	18.81	19.11	18.65	19.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)					Tune-up
				39700/250 1	40160/254 7	40620/25 93	41080/263 9	41540/268 5	
10MHz	QPSK	1	0	18.47	18.84	18.81	18.96	18.99	19.50
		1	25	18.74	18.91	18.70	18.77	19.02	19.50
		1	49	18.96	18.80	18.68	18.71	18.92	19.50
		25	0	18.54	18.75	18.81	18.88	18.91	19.50
		25	13	18.71	18.78	18.93	18.94	18.65	19.50
		25	25	18.78	18.88	18.97	18.98	18.69	19.50
		50	0	18.66	18.91	18.67	18.55	18.80	19.50
	16QAM	1	0	18.82	18.68	18.92	18.88	18.36	19.50
		1	25	19.00	19.26	18.96	18.78	18.98	19.50
		1	49	18.84	18.88	18.78	18.80	18.54	19.50
		25	0	18.59	18.53	18.55	18.59	18.49	19.50
		25	13	18.75	18.87	18.89	18.51	18.77	19.50
		25	25	18.76	19.12	19.02	18.96	18.98	19.50
		50	0	18.74	19.06	19.04	19.34	18.52	19.50
	64QAM	1	0	18.63	18.47	18.29	18.07	18.15	19.50
		1	25	19.13	18.65	18.71	18.39	18.29	19.50
		1	49	18.70	18.54	18.42	18.24	18.82	19.50
		25	0	18.77	18.81	18.31	18.91	18.83	19.50
		25	13	18.64	18.92	18.86	18.82	18.80	19.50
		25	25	18.71	18.81	18.97	18.73	18.59	19.50
		50	0	18.91	18.79	18.65	18.99	18.61	19.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)					Tune-up
				39725/250 3.5	40173/254 8.3	40620/25 93	41068/263 7.8	41515/268 2.5	
15MHz	QPSK	1	0	18.47	18.56	18.61	18.76	18.85	19.50
		1	38	18.80	18.89	18.76	19.05	19.16	19.50
		1	74	18.92	18.80	18.74	18.81	18.86	19.50
		36	0	18.64	18.85	18.63	18.80	18.85	19.50

		36	18	18.73	18.64	18.75	18.76	18.75	19.50
		36	39	18.92	18.70	18.79	18.74	18.87	19.50
		75	0	18.42	18.73	18.59	18.79	18.88	19.50
	16QAM	1	0	18.76	18.50	18.84	18.90	18.44	19.50
		1	38	18.66	18.96	18.90	19.02	19.06	19.50
		1	74	18.78	18.84	18.90	18.74	18.70	19.50
		36	0	18.55	18.47	18.33	18.41	18.35	19.50
		36	18	18.59	18.77	18.81	18.67	18.81	19.50
		36	39	18.46	19.10	18.82	18.84	19.06	19.50
		75	0	18.48	18.80	18.76	19.12	18.58	19.50
	64QAM	1	0	18.37	18.33	18.25	18.43	18.23	19.50
		1	38	19.01	18.61	18.57	18.33	18.45	19.50
		1	74	18.68	18.40	18.60	18.20	18.82	19.50
		36	0	18.71	18.77	18.37	18.75	18.91	19.50
		36	18	18.48	18.74	18.82	18.84	18.88	19.50
		36	39	18.49	18.47	18.81	18.65	18.77	19.50
		75	0	19.07	18.63	18.75	18.93	18.69	19.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)					Tune-up
				39750/2506	40185/2549.5	40620/2593	41055/2636.5	41490/2680	
20MHz	QPSK	1	0	18.55	18.64	18.65	18.64	18.69	19.50
		1	50	18.76	18.79	18.84	18.83	18.88	19.50
		1	99	18.70	18.76	18.74	18.63	18.72	19.50
		50	0	18.58	18.65	18.53	18.74	18.73	19.50
		50	25	18.71	18.82	18.71	18.78	18.79	19.50
		50	50	18.72	18.78	18.75	18.72	18.69	19.50
		100	0	18.72	18.63	18.67	18.75	18.78	19.50
	16QAM	1	0	18.74	18.54	18.66	18.66	18.62	19.50
		1	50	18.94	18.98	18.92	18.90	19.06	19.50
		1	99	18.70	18.76	18.72	18.74	18.54	19.50
		50	0	18.53	18.47	18.55	18.45	18.43	19.50
		50	25	18.67	18.77	18.69	18.59	18.59	19.50
		50	50	18.54	18.92	18.72	18.92	19.06	19.50
		100	0	18.62	18.82	18.76	19.02	18.68	19.50
	64QAM	1	0	18.51	18.33	18.41	18.23	18.29	19.50
		1	50	18.83	18.59	18.63	18.57	18.43	19.50
		1	99	18.60	18.44	18.50	18.32	18.50	19.50
		50	0	18.57	18.83	18.53	18.67	18.63	19.50
		50	25	18.74	18.76	18.76	18.82	18.82	19.50
		50	50	18.71	18.71	18.67	18.47	18.67	19.50
		100	0	18.85	18.79	18.69	18.79	18.67	19.50

LTE B66

Sensor off--Ant0				Maximum Output Power (dBm)			Tune-up
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			
				131979/1710.7	132322/1745	132665/1779.3	
1.4MHz	QPSK	1	0	22.78	22.85	22.79	24.50
		1	2	22.86	22.89	22.86	24.50
		1	5	22.78	22.80	22.78	24.50
		3	0	22.93	22.93	22.94	24.50
		3	2	22.90	22.92	22.91	24.50
		3	3	22.89	22.92	22.91	24.50
		6	0	21.97	22.02	22.05	23.50
	16QAM	1	0	22.03	22.11	22.05	23.50
		1	2	22.08	22.15	22.17	23.50
		1	5	22.02	22.09	22.09	23.50
		3	0	21.93	21.90	21.98	23.50
		3	2	21.96	21.91	21.99	23.50
		3	3	21.89	21.94	21.97	23.50
		6	0	21.09	21.12	21.16	22.50
	64QAM	1	0	21.05	21.15	21.17	22.50
		1	2	21.10	21.21	21.29	22.50
		1	5	21.06	21.12	21.20	22.50
		3	0	20.86	20.58	20.32	22.50
		3	2	20.82	20.35	20.46	22.50
		3	3	20.68	20.77	20.81	22.50
		6	0	20.05	20.02	20.07	21.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				131987/1711.5	132322/1745	132657/1778.5	
3MHz	QPSK	1	0	22.69	22.71	22.68	24.50
		1	7	22.80	22.81	22.78	24.50
		1	14	22.69	22.69	22.72	24.50
		8	0	21.90	21.95	21.95	23.50
		8	4	21.99	22.02	22.02	23.50
		8	7	21.90	21.96	21.95	23.50
		15	0	21.90	21.95	21.93	23.50
	16QAM	1	0	21.91	22.07	21.93	23.50
		1	7	22.02	22.15	22.04	23.50
		1	14	21.96	21.99	21.93	23.50
		8	0	20.97	21.01	21.00	22.50
		8	4	21.04	21.07	21.09	22.50
		8	7	20.95	21.02	20.98	22.50
		15	0	20.91	20.95	20.96	22.50
	64QAM	1	0	20.96	21.01	21.03	22.50
		1	7	21.06	21.09	21.13	22.50
		1	14	20.97	20.98	21.00	22.50

		8	0	20.00	20.03	20.03	21.50
		8	4	20.04	20.09	20.07	21.50
		8	7	19.97	20.03	20.04	21.50
		15	0	20.00	19.98	19.97	21.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				131997/1712.5	132322/1745	132647/1777.5	
5MHz	QPSK	1	0	22.96	23.00	22.91	24.50
		1	13	23.07	23.09	23.04	24.50
		1	24	22.91	22.95	22.95	24.50
		12	0	21.95	22.04	22.01	23.50
		12	6	22.06	22.11	22.09	23.50
		12	13	22.01	22.02	22.01	23.50
		25	0	21.96	22.04	22.02	23.50
	16QAM	1	0	22.17	22.31	22.23	23.50
		1	13	22.33	22.34	22.35	23.50
		1	24	22.20	22.18	22.25	23.50
		12	0	20.93	21.02	21.00	22.50
		12	6	21.04	21.08	21.07	22.50
		12	13	21.01	21.01	21.01	22.50
		25	0	20.99	21.05	21.05	22.50
	64QAM	1	0	21.10	21.20	21.20	22.50
		1	13	21.25	21.29	21.27	22.50
		1	24	21.09	21.13	21.15	22.50
		12	0	19.98	20.05	20.07	21.50
		12	6	20.10	20.16	20.13	21.50
		12	13	20.09	20.05	20.07	21.50
		25	0	20.04	20.07	20.09	21.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				132022/1715	132322/1745	132622/1775	
10MHz	QPSK	1	0	23.03	23.08	23.08	24.50
		1	25	23.03	23.09	23.03	24.50
		1	49	22.99	23.00	23.04	24.50
		25	0	21.94	22.04	22.04	23.50
		25	13	22.06	22.10	22.09	23.50
		25	25	22.01	22.04	21.98	23.50
		50	0	21.97	22.06	22.04	23.50
	16QAM	1	0	22.32	22.44	22.37	23.50
		1	25	22.33	22.43	22.37	23.50
		1	49	22.30	22.30	22.32	23.50
		25	0	20.93	21.01	21.03	22.50
		25	13	21.07	21.13	21.07	22.50
		25	25	20.99	21.09	21.00	22.50
		50	0	20.99	21.06	21.02	22.50

	64QAM	1	0	21.17	21.29	21.18	22.50
		1	25	21.24	21.27	21.16	22.50
		1	49	21.16	21.20	21.15	22.50
		25	0	19.98	20.05	20.05	21.50
		25	13	20.10	20.17	20.13	21.50
		25	25	20.03	20.11	20.04	21.50
		50	0	20.00	20.04	20.04	21.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				132047/1717.5	132322/1745	132597/1772.5	
15MHz	QPSK	1	0	22.98	23.04	23.00	24.50
		1	38	23.06	23.11	23.04	24.50
		1	74	23.00	22.95	22.93	24.50
		36	0	21.98	22.03	22.04	23.50
		36	18	22.05	22.05	22.05	23.50
		36	39	22.03	22.03	21.96	23.50
		75	0	22.02	22.07	22.03	23.50
	16QAM	1	0	22.20	22.37	22.36	23.50
		1	38	22.29	22.39	22.40	23.50
		1	74	22.23	22.24	22.28	23.50
		36	0	20.96	21.02	21.01	22.50
		36	18	21.02	21.09	21.05	22.50
		36	39	21.01	21.05	20.98	22.50
		75	0	21.01	21.02	21.04	22.50
	64QAM	1	0	21.18	21.35	21.30	22.50
		1	38	21.30	21.38	21.30	22.50
		1	74	21.20	21.21	21.18	22.50
		36	0	19.98	20.07	20.05	21.50
		36	18	20.05	20.14	20.05	21.50
		36	39	20.04	20.11	20.00	21.50
		75	0	20.02	20.05	20.00	21.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				132072/1720	132322/1745	132572/1770	
20MHz	QPSK	1	0	22.90	23.02	22.93	24.50
		1	50	23.06	23.13	23.07	24.50
		1	99	22.89	22.89	22.85	24.50
		50	0	22.05	22.00	22.07	23.50
		50	25	22.11	22.14	22.11	23.50
		50	50	22.04	22.10	21.97	23.50
		100	0	22.03	22.02	22.03	23.50
	16QAM	1	0	22.13	22.26	22.14	23.50
		1	50	22.35	22.38	22.32	23.50
		1	99	22.15	22.13	22.06	23.50
		50	0	21.01	21.02	21.04	22.50

		50	25	21.10	21.12	21.10	22.50
		50	50	21.04	21.04	20.99	22.50
		100	0	21.01	20.99	21.00	22.50
	64QAM	1	0	21.04	21.15	21.19	22.50
		1	50	21.21	21.34	21.32	22.50
		1	99	20.94	21.06	21.11	22.50
		50	0	20.04	20.00	20.11	21.50
		50	25	20.11	20.17	20.13	21.50
		50	50	20.09	20.07	19.98	21.50
		100	0	20.02	20.03	20.03	21.50

LTE B66							
Sensor on--Ant0				Maximum Output Power (dBm)			Tune-up
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			
				131979/1710.7	132322/1745	132665/1779.3	
1.4MHz	QPSK	1	0	19.45	19.35	19.63	20.50
		1	2	19.76	19.88	19.82	20.50
		1	5	19.57	19.57	19.49	20.50
		3	0	19.64	19.68	19.85	20.50
		3	2	19.65	19.75	19.88	20.50
		3	3	19.78	19.41	19.67	20.50
		6	0	19.42	19.62	19.49	20.50
	16QAM	1	0	19.71	19.64	19.96	20.50
		1	2	20.05	19.97	20.04	20.50
		1	5	19.82	19.50	19.90	20.50
		3	0	19.81	19.58	20.04	20.50
		3	2	19.63	19.74	19.78	20.50
		3	3	19.85	19.53	19.79	20.50
		6	0	19.44	19.68	19.53	20.50
	64QAM	1	0	19.48	19.95	20.04	20.50
		1	2	19.63	19.68	19.79	20.50
		1	5	19.77	19.54	19.98	20.50
		3	0	19.64	19.78	19.94	20.50
		3	2	19.45	19.79	19.80	20.50
		3	3	19.46	19.63	19.77	20.50
		6	0	19.70	19.68	19.91	20.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				131987/1711.5	132322/1745	132657/1778.5	
3MHz	QPSK	1	0	19.57	19.77	19.63	20.50
		1	7	19.80	19.88	19.78	20.50
		1	14	19.35	19.51	19.61	20.50
		8	0	19.56	19.88	19.85	20.50
		8	4	19.59	19.73	19.72	20.50

		8	7	19.60	19.55	19.65	20.50
		15	0	19.76	19.64	19.59	20.50
	16QAM	1	0	20.11	19.90	19.92	20.50
		1	7	20.05	19.93	20.08	20.50
		1	14	20.00	19.82	20.04	20.50
		8	0	19.87	19.60	19.94	20.50
		8	4	19.67	19.84	19.88	20.50
		8	7	19.67	19.63	19.91	20.50
		15	0	19.60	19.64	19.89	20.50
		1	0	19.72	19.91	20.12	20.50
	64QAM	1	7	20.05	19.82	20.13	20.50
		1	14	19.51	19.54	20.08	20.50
		8	0	19.58	19.54	19.82	20.50
		8	4	19.77	19.65	19.80	20.50
		8	7	19.80	19.63	19.67	20.50
		15	0	19.72	19.52	19.81	20.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				131997/1712.5	132322/1745	132647/1777.5	
5MHz	QPSK	1	0	19.65	19.53	19.87	20.50
		1	13	19.80	19.74	19.90	20.50
		1	24	19.51	19.65	19.69	20.50
		12	0	19.62	19.78	19.77	20.50
		12	6	19.85	19.81	19.98	20.50
		12	13	19.72	19.81	19.79	20.50
		25	0	19.64	19.54	19.87	20.50
		1	0	19.87	19.92	19.92	20.50
	16QAM	1	13	20.03	20.13	20.16	20.50
		1	24	19.80	19.88	20.06	20.50
		12	0	19.83	19.70	19.72	20.50
		12	6	19.71	19.68	19.94	20.50
		12	13	19.57	19.83	19.65	20.50
		25	0	19.72	19.64	19.85	20.50
		1	0	19.76	19.87	20.08	20.50
		1	13	19.81	19.88	20.27	20.50
	64QAM	1	24	19.71	19.64	19.90	20.50
		12	0	19.62	19.74	19.86	20.50
		12	6	19.75	19.85	19.74	20.50
		12	13	19.76	19.79	19.89	20.50
		25	0	19.64	19.62	19.75	20.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				132022/1715	132322/1745	132622/1775	
10MHz	QPSK	1	0	19.59	19.43	19.53	20.50
		1	25	19.68	19.70	19.70	20.50

		1	49	19.57	19.37	19.79	20.50
		25	0	19.44	19.70	19.57	20.50
		25	13	19.71	19.67	19.64	20.50
		25	25	19.48	19.69	19.71	20.50
		50	0	19.48	19.70	19.63	20.50
	16QAM	1	0	19.89	19.72	19.80	20.50
		1	25	19.89	20.11	19.94	20.50
		1	49	19.74	19.68	19.86	20.50
		25	0	19.53	19.64	19.90	20.50
		25	13	19.51	19.64	19.90	20.50
		25	25	19.61	19.61	19.77	20.50
		50	0	19.68	19.50	19.75	20.50
	64QAM	1	0	19.46	19.85	19.84	20.50
		1	25	19.95	19.74	20.09	20.50
		1	49	19.69	19.64	19.92	20.50
		25	0	19.62	19.48	19.90	20.50
		25	13	19.81	19.79	19.80	20.50
		25	25	19.60	19.67	19.63	20.50
		50	0	19.48	19.58	19.69	20.50
Bandwidth	Modulation	RB Allocation	Offset	Channel/Frequency(MHz)			Tune-up
				132047/1717.5	132322/1745	132597/1772.5	
15MHz	QPSK	1	0	19.51	19.77	19.73	20.50
		1	38	19.72	19.76	19.92	20.50
		1	74	19.59	19.59	19.73	20.50
		36	0	19.70	19.66	19.77	20.50
		36	18	19.65	19.69	19.92	20.50
		36	39	19.68	19.91	19.63	20.50
		75	0	19.60	19.78	19.63	20.50
	16QAM	1	0	20.07	19.84	19.98	20.50
		1	38	20.17	20.05	20.12	20.50
		1	74	19.94	19.90	19.88	20.50
		36	0	19.83	19.58	19.84	20.50
		36	18	19.69	19.80	19.88	20.50
		36	39	19.71	19.73	19.77	20.50
		75	0	19.78	19.74	19.77	20.50
	64QAM	1	0	19.66	19.69	20.12	20.50
		1	38	20.03	20.00	20.05	20.50
		1	74	19.73	19.84	20.04	20.50
		36	0	19.68	19.58	19.94	20.50
		36	18	19.63	19.91	20.00	20.50
		36	39	19.80	19.71	19.77	20.50
		75	0	19.66	19.60	19.87	20.50
Bandwidth	Modulation	RB	Offset	Channel/Frequency(MHz)			Tune-up

		Allocation		132072/1720	132322/1745	132572/1770	
20MHz	QPSK	1	0	19.57	19.63	19.71	20.50
		1	50	19.70	19.82	19.88	20.50
		1	99	19.51	19.55	19.69	20.50
		50	0	19.64	19.66	19.77	20.50
		50	25	19.73	19.79	19.82	20.50
		50	50	19.62	19.73	19.71	20.50
		100	0	19.62	19.64	19.73	20.50
	16QAM	1	0	19.95	19.92	19.98	20.50
		1	50	20.07	20.05	20.14	20.50
		1	99	19.86	19.82	19.98	20.50
		50	0	19.67	19.62	19.80	20.50
		50	25	19.71	19.78	19.84	20.50
		50	50	19.67	19.75	19.73	20.50
		100	0	19.62	19.66	19.73	20.50
	64QAM	1	0	19.66	19.77	19.94	20.50
		1	50	19.85	19.94	20.11	20.50
		1	99	19.59	19.72	19.92	20.50
		50	0	19.68	19.64	19.80	20.50
		50	25	19.73	19.77	19.84	20.50
		50	50	19.70	19.77	19.73	20.50
		100	0	19.64	19.70	19.77	20.50

9.4 WLAN Mode

Wi-Fi 2.4GHz Sensor off-ANT2 Mode	Channel /Frequency(MHz)	Average Output Power (dBm)	
		Tune-up	Meas.
802.11b (1M)	1/2412	18.00	16.39
	2/2417	22.00	20.87
	6/2437	22.00	21.04
	10/2457	22.00	20.86
	11/2462	19.50	18.19
802.11g (6M)	1/2412	12.50	12.13
	6/2437	20.00	19.50
	11/2462	12.50	11.81
802.11n-HT20 (MCS0)	1/2412	12.50	10.58
	6/2437	20.00	18.49
	11/2462	12.50	10.68
802.11n-HT40 (MCS0)	3/2422	12.50	11.21
	6/2437	20.00	18.90
	9/2452	12.50	11.41
802.11ax HE20 (MCS0)	1/2412	12.50	10.88
	6/2437	20.00	18.66
	11/2462	12.50	10.89
802.11ax HE40 (MCS0)	3/2422	12.50	11.52
	6/2437	20.00	19.12
	9/2452	12.50	11.60

Wi-Fi 2.4GHz Sensor on-ANT2 Mode	Channel /Frequency(MHz)	Average Output Power (dBm)	
		Tune-up	Meas.
802.11b (1M)	cc	14.50	13.81
	6/2437	14.50	13.90
	11/2462	14.50	13.75
802.11g (6M)	1/2412	12.50	12.13
	6/2437	13.50	13.14
	11/2462	12.50	11.81
802.11n-HT20 (MCS0)	1/2412	12.50	10.58
	6/2437	13.50	12.77
	11/2462	12.50	10.68
802.11n-HT40	3/2422	12.50	11.21

(MCS0)	6/2437	13.50	12.43
	9/2452	12.50	11.41
802.11ax HE20 (MCS0)	1/2412	12.50	10.88
	6/2437	13.50	12.93
	11/2462	12.50	10.89
802.11ax HE40 (MCS0)	3/2422	12.50	11.52
	6/2437	13.50	12.46
	9/2452	12.50	11.60

Wi-Fi 5GHz Sensor off-ANT2 Mode	Band	Channel /Frequency(MHz)	Average Output Power (dBm)	
			Tune-up	Meas.
802.11a (6M)	U-NII-1	36/5180	14.00	13.03
		40/5200	14.00	13.09
		48/5240	14.00	12.47
802.11n-HT20 (MCS0)	U-NII-1	36/5180	14.00	12.45
		40/5200	14.00	12.51
		48/5240	14.00	12.83
802.11n-HT40 (MCS0)	U-NII-1	38/5190	16.50	15.48
		46/5230	15.00	14.00
802.11ac-VHT20 (MCS0)	U-NII-1	36/5180	14.00	12.47
		40/5200	14.00	12.46
		48/5240	14.00	12.83
802.11ac-VHT40 (MCS0)	U-NII-1	38/5190	16.50	15.44
		46/5230	15.00	14.05
802.11ac-VHT80 (MCS0)	U-NII-1	42/5210	15.00	13.68
802.11ax-HE20 (MCS0)	U-NII-1	36/5180	14.00	12.76
		40/5200	14.00	12.85
		48/5240	14.00	13.11
802.11ax-HE40 (MCS0)	U-NII-1	38/5190	16.50	15.75
		46/5230	15.00	14.30
802.11ax-HE80 (MCS0)	U-NII-1	42/5210	15.00	14.05
802.11ax-HE160 (MCS0)	U-NII-1	50/5250	15.00	13.98

Wi-Fi 5GHz Sensor on-ANT2	Band	Channel /Frequency(MHz)	Average Output Power (dBm)	
			Tune-up	Meas.

Mode				
802.11a (6M)	U-NII-1	36/5180	9.50	8.97
		40/5200	9.50	8.84
		48/5240	9.50	8.93
802.11n-HT20 (MCS0)	U-NII-1	36/5180	8.50	8.24
		40/5200	8.50	8.48
		48/5240	8.50	8.14
802.11n-HT40 (MCS0)	U-NII-1	38/5190	8.50	7.98
		46/5230	8.50	7.86
802.11ac-VHT20 (MCS0)	U-NII-1	36/5180	8.50	8.25
		40/5200	8.50	8.37
		48/5240	8.50	7.80
802.11ac-VHT40 (MCS0)	U-NII-1	38/5190	8.50	7.88
		46/5230	8.50	7.86
802.11ac-VHT80 (MCS0)	U-NII-1	42/5210	8.50	6.63
802.11ax-HE20 (MCS0)	U-NII-1	36/5180	8.50	8.44
		40/5200	8.50	7.98
		48/5240	8.50	7.89
802.11ax-HE40 (MCS0)	U-NII-1	38/5190	8.50	7.98
		46/5230	8.50	8.04
802.11ax-HE80 (MCS0)	U-NII-1	42/5210	8.50	7.76
802.11ax-HE160 (MCS0)	U-NII-1	50/5250	8.50	8.16

Wi-Fi 5GHz Sensor off-ANT2 Mode	Band	Channel /Frequency(MHz)	Average Output Power (dBm)	
			Tune-up	Meas.
802.11a (6M)	U-NII-2A	52/5260	14.00	12.51
		60/5300	14.00	12.20
		64/5320	14.00	12.16
802.11n-HT20 (MCS0)	U-NII-2A	52/5260	13.00	11.85
		60/5300	13.00	11.57
		64/5320	14.00	12.54
802.11n-HT40 (MCS0)	U-NII-2A	54/5270	16.50	14.72
		62/5310	14.00	12.89
802.11ac-VHT20 (MCS0)	U-NII-2A	52/5260	13.00	11.88
		60/5300	13.00	11.57
		64/5320	14.00	12.59

802.11ac-VHT40 (MCS0)	U-NII-2A	54/5270	16.50	14.66
		62/5310	14.00	12.94
802.11ac-VHT80 (MCS0)	U-NII-2A	58/5290	15.00	13.82
802.11ax-HE20 (MCS0)	U-NII-2A	52/5260	13.00	12.03
		60/5300	13.00	11.98
		64/5320	14.00	12.96
802.11ax-HE40 (MCS0)	U-NII-2A	54/5270	16.50	14.96
		62/5310	15.00	13.27
802.11ax-HE80 (MCS0)	U-NII-2A	58/5290	15.00	14.11

Wi-Fi 5GHz Sensor on-ANT2 Mode	Band	Channel /Frequency(MHz)	Average Output Power (dBm)	
			Tune-up	Meas.
802.11a (6M)	U-NII-2A	52/5260	9.50	8.88
		60/5300	9.50	8.84
		64/5320	9.50	8.93
802.11n-HT20 (MCS0)	U-NII-2A	52/5260	8.50	8.14
		60/5300	8.50	8.29
		64/5320	8.50	7.91
802.11n-HT40 (MCS0)	U-NII-2A	54/5270	8.50	7.62
		62/5310	8.50	7.72
802.11ac-VHT20 (MCS0)	U-NII-2A	52/5260	8.50	8.16
		60/5300	8.50	7.96
		64/5320	8.50	7.82
802.11ac-VHT40 (MCS0)	U-NII-2A	54/5270	8.50	7.80
		62/5310	8.50	7.67
802.11ac-VHT80 (MCS0)	U-NII-2A	58/5290	8.50	6.14
802.11ax-HE20 (MCS0)	U-NII-2A	52/5260	8.50	8.14
		60/5300	8.50	7.98
		64/5320	8.50	7.80
802.11ax-HE40 (MCS0)	U-NII-2A	54/5270	8.50	7.64
		62/5310	8.50	7.71
802.11ax-HE80 (MCS0)	U-NII-2A	58/5290	8.50	7.33

Wi-Fi 5GHz Sensor on-ANT2	Band	Channel /Frequency(MHz)	Average Output Power (dBm)	
			Tune-up	Meas.

Mode				
802.11a (6M)	U-NII-2A	52/5260	9.50	8.88
		60/5300	9.50	8.84
		64/5320	9.50	8.93
802.11n-HT20 (MCS0)	U-NII-2A	52/5260	8.50	8.14
		60/5300	8.50	8.29
		64/5320	8.50	7.91
802.11n-HT40 (MCS0)	U-NII-2A	54/5270	8.50	7.62
		62/5310	8.50	7.72
802.11ac-VHT20 (MCS0)	U-NII-2A	52/5260	8.50	8.16
		60/5300	8.50	7.96
		64/5320	8.50	7.82
802.11ac-VHT40 (MCS0)	U-NII-2A	54/5270	8.50	7.80
		62/5310	8.50	7.67
802.11ac-VHT80 (MCS0)	U-NII-2A	58/5290	8.50	6.14
802.11ax-HE20 (MCS0)	U-NII-2A	52/5260	8.50	8.14
		60/5300	8.50	7.98
		64/5320	8.50	7.80
802.11ax-HE40 (MCS0)	U-NII-2A	54/5270	8.50	7.64
		62/5310	8.50	7.71
802.11ax-HE80 (MCS0)	U-NII-2A	58/5290	8.50	7.33

Wi-Fi 5GHz Sensor off-ANT2 Mode	Band	Channel /Frequency(MHz)	Average Output Power (dBm)	
			Tune-up	Meas.
802.11a (6M)	U-NII-2C	100/5500	13.00	12.16
		116/5580	17.00	15.56
		140/5700	17.00	15.43
		144/5720	13.00	11.90
802.11n-HT20 (MCS0)	U-NII-2C	100/5500	14.00	12.49
		116/5580	14.00	12.86
		140/5700	14.00	13.18
		144/5720	14.00	12.76
802.11n-HT40 (MCS0)	U-NII-2C	102/5510	14.00	12.87
		110/5550	16.00	15.01
		134/5670	15.00	13.59
		142/5710	15.00	13.32

802.11ac-VHT20 (MCS0)	U-NII-2C	100/5500	14.00	12.47
		116/5580	14.00	12.85
		140/5700	14.00	13.16
		144/5720	14.00	12.75
802.11ac-VHT40 (MCS0)	U-NII-2C	102/5510	14.00	12.85
		110/5550	16.00	14.93
		118/5590	15.00	13.56
		134/5670	15.00	13.31
802.11ac-VHT80 (MCS0)	U-NII-2C	106/5530	16.00	14.73
		122/5610	16.00	14.80
802.11ax-HE20 (MCS0)	U-NII-2C	100/5500	14.00	12.88
		116/5580	14.00	13.05
		140/5700	14.00	13.62
		144/5720	14.00	12.83
802.11ax-HE40 (MCS0)	U-NII-2C	102/5510	15.00	13.15
		110/5550	16.00	15.25
		118/5590	15.00	13.82
		134/5670	15.00	13.56
802.11ax-HE80 (MCS0)	U-NII-2C	106/5530	16.00	15.26
		122/5610	16.00	15.04
802.11ax-HE160 (MCS0)	U-NII-2C	114/5570	18.50	17.50

Wi-Fi 5GHz Sensor on-ANT2 Mode	Band	Channel /Frequency(MHz)	Average Output Power (dBm)	
			Tune-up	Meas.
802.11a (6M)	U-NII-2C	100/5500	8.00	7.44
		116/5580	8.00	7.43
		140/5700	8.00	7.35
		144/5720	8.00	7.30
802.11n-HT20 (MCS0)	U-NII-2C	100/5500	7.00	6.27
		116/5580	7.00	6.12
		140/5700	7.00	6.19
		144/5720	7.00	6.38
802.11n-HT40 (MCS0)	U-NII-2C	102/5510	7.00	5.92
		110/5550	7.00	6.00
		134/5670	7.00	5.94
		142/5710	7.00	6.01
802.11ac-VHT20 (MCS0)	U-NII-2C	100/5500	7.00	6.25
		116/5580	7.00	5.99

		140/5700	7.00	5.91
		144/5720	7.00	6.12
802.11ac-VHT40 (MCS0)	U-NII-2C	102/5510	7.00	5.91
		110/5550	7.00	5.99
		118/5590	7.00	5.93
		134/5670	7.00	6.01
802.11ac-VHT80 (MCS0)	U-NII-2C	106/5530	7.00	6.59
		122/5610	7.00	6.54
802.11ax-HE20 (MCS0)	U-NII-2C	100/5500	7.00	6.42
		116/5580	7.00	6.24
		140/5700	7.00	6.20
		144/5720	7.00	6.07
802.11ax-HE40 (MCS0)	U-NII-2C	102/5510	7.00	6.02
		110/5550	7.00	5.90
		118/5590	7.00	5.91
		134/5670	7.00	6.04
802.11ax-HE80 (MCS0)	U-NII-2C	106/5530	7.00	5.79
		122/5610	7.00	5.90
802.11ax-HE160 (MCS0)	U-NII-2C	114/5570	7.00	5.98

Wi-Fi 5GHz Sensor off-ANT2 Mode	Band	Channel /Frequency(MHz)	Average Output Power (dBm)	
			Tune-up	Meas.
802.11a (6M)	U-NII-3	149/5745	15.50	14.44
		157/5785	15.50	14.73
		165/5825	15.50	14.33
802.11n-HT20 (MCS0)	U-NII-3	149/5745	15.00	13.82
		157/5785	15.00	14.13
		165/5825	15.00	13.71
802.11n-HT40 (MCS0)	U-NII-3	151/5755	15.00	14.08
		159/5795	15.00	14.36
802.11ac-VHT20 (MCS0)	U-NII-3	149/5745	15.00	13.84
		157/5785	15.00	14.12
		165/5825	15.00	13.71
802.11ac-VHT40 (MCS0)	U-NII-3	151/5755	15.00	14.12
		159/5795	15.00	14.32
802.11ac-VHT80 (MCS0)	U-NII-3	155/5775	15.00	14.05
802.11ax-HE20	U-NII-3	149/5745	15.00	14.17

(MCS0)		157/5785	15.00	14.23
		165/5825	15.00	14.00
802.11ax-HE40 (MCS0)	U-NII-3	151/5755	15.00	14.47
		159/5795	15.00	14.51
802.11ax-HE80 (MCS0)	U-NII-3	155/5775	15.00	14.42

Wi-Fi 5GHz Sensor off-ANT2 Mode	Band	Channel /Frequency(MHz)	Average Output Power (dBm)	
			Tune-up	Meas.
802.11a (6M)	U-NII-3	149/5745	7.50	6.73
		157/5785	7.50	6.61
		165/5825	7.50	6.72
802.11n-HT20 (MCS0)	U-NII-3	149/5745	6.50	5.84
		157/5785	6.50	5.93
		165/5825	6.50	5.72
802.11n-HT40 (MCS0)	U-NII-3	151/5755	6.50	5.62
		159/5795	6.50	5.68
802.11ac-VHT20 (MCS0)	U-NII-3	149/5745	6.50	6.03
		157/5785	6.50	5.84
		165/5825	6.50	5.91
802.11ac-VHT40 (MCS0)	U-NII-3	151/5755	6.50	5.61
		159/5795	6.50	5.58
802.11ac-VHT80 (MCS0)	U-NII-3	155/5775	6.50	4.64
802.11ax-HE20 (MCS0)	U-NII-3	149/5745	6.50	6.20
		157/5785	6.50	5.93
		165/5825	6.50	6.02
802.11ax-HE40 (MCS0)	U-NII-3	151/5755	6.50	5.69
		159/5795	6.50	5.72
802.11ax-HE80 (MCS0)	U-NII-3	155/5775	6.50	5.59

9.5 Bluetooth Mode


BT	Conducted Power(dBm)			Tune-up Limit (dBm)
	Channel/Frequency(MHz)			
	Ch 0/2402 MHz	Ch 39/2441 MHz	Ch 78/2480 MHz	
GFSK	11.79	12.10	11.36	13.50
π/4DQPSK	11.68	12.02	11.08	13.50
8DPSK	11.79	12.01	11.29	13.50
BLE	Ch 0/2402 MHz	Ch 19/2440 MHz	Ch 39/2480 MHz	Tune-up Limit (dBm)
GFSK(1M)	12.31	12.71	12.09	13.50
GFSK(2M)	12.32	12.65	11.85	13.50
S2	12.03	12.39	11.44	13.50
S8	11.66	12.15	11.21	13.50

9.6 NFC Mode

Frequency(MHz)	dB μ V/m @3m	EIRP (dBm)	Tune-up (dBm)	Limit	SAR Test Exclusion Power Thresholds(mW)
13.563	71.339	-23.861	-22.000		443
Note1: EIRP = Max.H-field strength @ 3m – 95.2 Note2: According to 447498 D01 General RF Exposure Guidance v06 section 4.3.1, the SAR test exclusion power thresholds for NFC band is 443 mW.					


The test is in transmitting all modes, NFC-A was selected as the worst condition. The test data of the worst-case condition was recorded as below.

A symbol (dB μ V/m) in the test plot below means (dB μ V/m).

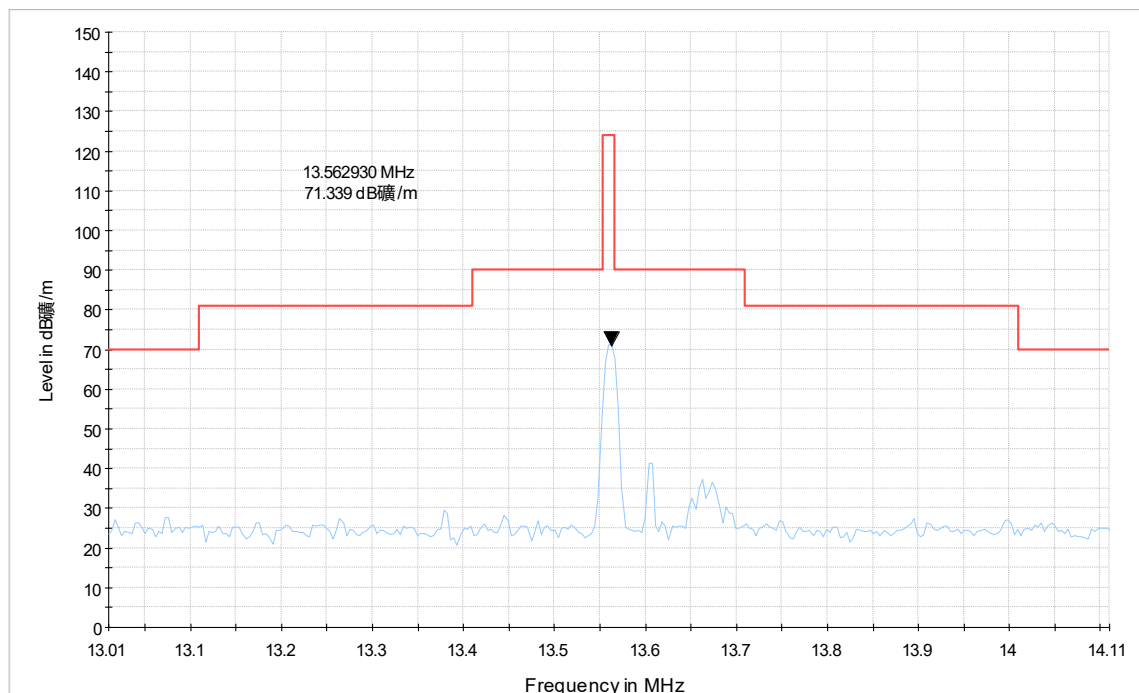

10 Measured and Reported (Scaled) SAR Results

10.1 EUT Antenna Locations

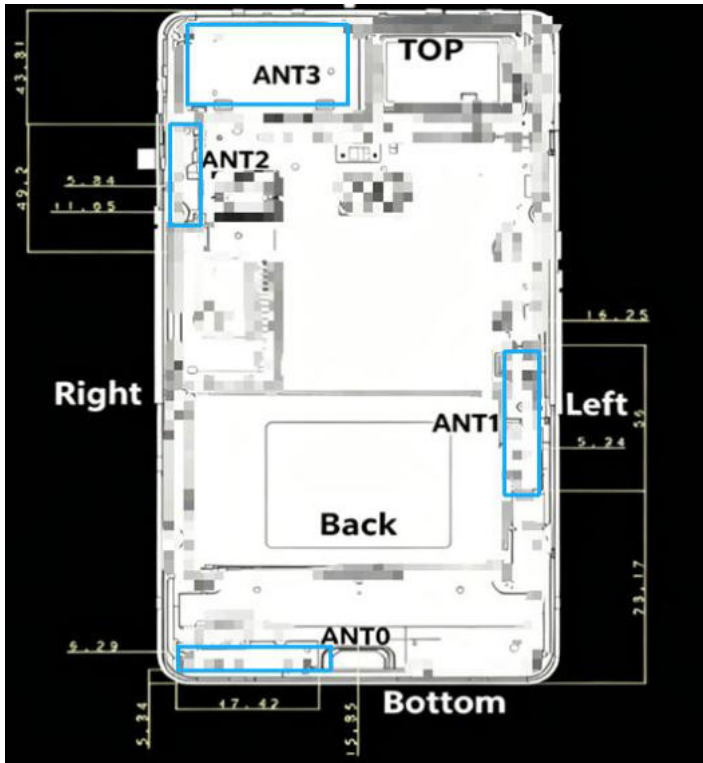

Note: The location of the test is detailed in Section 5.1.

10.2 Measured SAR Results

Note:

- The value with blue color is the maximum SAR Value of each test band.
- For GSM, when multiple slots are used, SAR should be tested to account for the maximum source-based time-averaged output power.
- For WCDMA, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.
- For LTE, QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are $\geq 50\%$ limit(1g).
- Per 248227, for band U-NII-1 and U-NII-2A, when the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.

Body SAR

Band	Antenna	Test Position	Dist. (mm)	Mode	Power Reduction	RB	Offset	Ch./Freq. (MHz)	Tune-up (dBm)	Measured power (dBm)	Measured SAR1g (W/Kg)	Power Drift (dB)	Scaling Factor	Report SAR1g (W/kg)	Plot No.
GSM850	ANT0	Back Side	0	4TX Slots	Sensor on	N/A	N/A	190/836.6	26.50	25.91	0.816	-0.030	1.15	0.935	10
			0	4TX Slots	Sensor on	N/A	N/A	128/824.2	26.50	25.79	0.689	-0.035	1.18	0.811	/
			0	4TX Slots	Sensor on	N/A	N/A	251/848.8	26.50	25.86	0.723	-0.190	1.16	0.838	/
		Back Side Repeat	0	4TX Slots	Sensor on	N/A	N/A	190/836.6	26.50	25.91	0.783	-0.022	1.15	0.897	/
		Front Side	0	4TX Slots	Sensor on	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Left Edge	0	4TX Slots	Sensor off	N/A	N/A	190/836.6	29.00	28.62	0.085	0.035	1.09	0.093	/
		Right Edge	0	4TX Slots	Sensor on	N/A	N/A	190/836.6	26.50	25.91	0.102	0.024	1.15	0.117	/
		Top Edge	0	4TX Slots	Sensor off	N/A	N/A	190/836.6	29.00	28.62	0.021	0.180	1.09	0.023	/
		Bottom Edge	0	4TX Slots	Sensor on	N/A	N/A	190/836.6	26.50	25.91	0.210	0.011	1.15	0.241	/
GSM1900	ANT0	Back Side	0	3TX Slots	Sensor on	RB	N/A	661/1880	26.00	24.77	0.702	0.032	1.33	0.932	11
			0	3TX Slots	Sensor on	N/A	N/A	512/1850.2	26.00	24.78	0.701	0.160	1.32	0.928	/
			0	3TX Slots	Sensor on	N/A	N/A	810/1909.8	26.00	24.62	0.678	0.022	1.37	0.932	/
		Front Side	0	3TX Slots	Sensor on	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Left Edge	0	3TX Slots	Sensor off	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Right Edge	0	3TX Slots	Sensor on	N/A	N/A	661/1880	26.00	24.77	0.317	0.037	1.33	0.421	/
		Top Edge	0	3TX Slots	Sensor off	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Bottom Edge	0	3TX Slots	Sensor on	N/A	N/A	661/1880	26.00	24.77	0.574	0.025	1.33	0.762	/
WCDMA II	ANT0	Back Side	0	RMC	Sensor on	N/A	N/A	9400/1880	21.00	20.13	0.657	0.019	1.22	0.803	/
			0	RMC	Sensor on	N/A	N/A	9262/1852.4	21.00	20.32	0.689	0.027	1.17	0.806	12
			0	RMC	Sensor on	N/A	N/A	9538/1907.6	21.00	20.51	0.624	-0.021	1.12	0.699	/

		Front Side	0	RMC	Sensor on	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Left Edge	0	RMC	Sensor off	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Right Edge	0	RMC	Sensor on	N/A	N/A	9400/1880	21.00	20.13	0.236	0.021	1.22	0.288	/
		Top Edge	0	N/A	Sensor off	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Bottom Edge	0	RMC	Sensor on	N/A	N/A	9400/1880	21.00	20.13	0.456	0.100	1.22	0.557	/
WCDMA V	ANT0	Back Side	0	RMC	Sensor on	N/A	N/A	4183/836.6	22.00	21.36	0.613	0.039	1.16	0.710	13
		Front Side	0	RMC	Sensor on	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Left Edge	0	RMC	Sensor off	N/A	N/A	4183/836.6	24.00	22.73	0.067	0.130	1.34	0.090	/
		Right Edge	0	RMC	Sensor on	N/A	N/A	4183/836.6	22.00	21.36	0.111	-0.081	1.16	0.129	/
		Top Edge	0	N/A	Sensor off	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Bottom Edge	0	RMC	Sensor on	N/A	N/A	4183/836.6	22.00	21.36	0.302	0.024	1.16	0.350	/
LTE 2	ANT0	Back Side	0	QPSK	Sensor on	1	50	18700/1860	21.50	20.92	0.708	0.011	1.14	0.809	/
			0	QPSK	Sensor on	1	50	18900/1880	21.50	20.83	0.721	-0.011	1.17	0.841	/
			0	QPSK	Sensor on	1	0	19100/1900	21.50	20.85	0.700	0.018	1.16	0.813	/
			0	QPSK	Sensor on	50%	25	18700/1860	21.50	20.92	0.722	0.024	1.14	0.825	/
			0	QPSK	Sensor on	50%	25	18900/1880	21.50	20.88	0.693	0.190	1.15	0.799	/
			0	QPSK	Sensor on	50%	25	19100/1900	21.50	20.82	0.738	0.031	1.17	0.863	14
			0	QPSK	Sensor on	100%	0	18700/1860	21.50	20.86	0.705	0.024	1.16	0.817	/
			0	QPSK	Sensor on	100%	0	18900/1880	21.50	20.72	0.691	0.060	1.20	0.827	/
			0	QPSK	Sensor on	100%	0	19100/1900	21.50	20.70	0.707	0.028	1.20	0.850	/
		Front Side	0	QPSK	Sensor on	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
			0	QPSK	Sensor on	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Left Edge	0	QPSK	Sensor off	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
			0	QPSK	Sensor off	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Right Edge	0	QPSK	Sensor on	1	50	18700/1860	21.50	20.92	0.248	-0.041	1.14	0.283	/
			0	QPSK	Sensor on	50%	25	18700/1860	21.50	20.92	0.287	0.035	1.14	0.328	/
		Top Edge	0	N/A	Sensor off	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
			0	N/A	Sensor off	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Bottom Edge	0	QPSK	Sensor on	1	50	18700/1860	21.50	20.92	0.410	0.025	1.14	0.469	/
			0	QPSK	Sensor on	50%	25	18700/1860	21.50	20.92	0.392	0.030	1.14	0.448	/
LTE 7	ANT0	Back Side	0	QPSK	Sensor on	1	50	20850/2510	17.50	16.69	0.764	0.029	1.21	0.921	/
			0	QPSK	Sensor on	1	50	21100/2535	17.50	16.67	0.777	-0.040	1.21	0.941	/
			0	QPSK	Sensor on	1	50	21350/2560	17.50	16.46	0.702	0.031	1.27	0.892	/
			0	QPSK	Sensor on	50%	50	20850/2510	17.50	16.77	0.713	0.044	1.18	0.844	/
			0	QPSK	Sensor on	50%	25	21100/2535	17.50	16.75	0.795	0.040	1.19	0.945	/
			0	QPSK	Sensor on	50%	25	21350/2560	17.50	16.65	0.775	0.060	1.22	0.943	/
			0	QPSK	Sensor on	100%	0	20850/2510	17.50	16.46	0.696	0.013	1.27	0.884	/
			0	QPSK	Sensor on	100%	0	21100/2535	17.50	16.46	0.690	0.080	1.27	0.877	/
			0	QPSK	Sensor on	100%	0	21350/2560	17.50	16.38	0.619	0.057	1.29	0.801	/
		Back Side Configuration2	0	QPSK	Sensor on	50%	25	21100/2535	17.50	16.75	0.798	0.038	1.19	0.948	15
		Front Side	0	QPSK	Sensor on	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
			0	QPSK	Sensor on	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/

		Left Edge	0	QPSK	Sensor off	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
			0	QPSK	Sensor off	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Right Edge	0	QPSK	Sensor on	1	50	20850/2510	17.50	16.55	0.180	0.027	1.24	0.224	/
			0	QPSK	Sensor on	50%	50	20850/2510	17.50	16.61	0.218	0.120	1.23	0.268	/
		Top Edge	0	N/A	Sensor off	1	50	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
			0	N/A	Sensor off	50%	25	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Bottom Edge	0	QPSK	Sensor on	1	50	20850/2510	17.50	16.55	0.506	0.022	1.24	0.630	/
			0	QPSK	Sensor on	50%	50	20850/2510	17.50	16.61	0.338	0.046	1.23	0.415	/
LTE 12/17	ANT0	Back Side	0	QPSK	Sensor on	1	25	23130/711	21.00	20.19	0.689	0.017	1.21	0.830	/
			0	QPSK	Sensor on	1	49	23060/704	21.00	20.13	0.696	0.025	1.22	0.850	/
			0	QPSK	Sensor on	1	25	23095/707.5	21.00	20.14	0.682	-0.090	1.22	0.831	/
			0	QPSK	Sensor on	50%	25	23060/704	21.00	20.22	0.693	0.035	1.20	0.829	/
			0	QPSK	Sensor on	50%	13	23095/707.5	21.00	19.99	0.685	0.024	1.26	0.864	/
			0	QPSK	Sensor on	50%	13	23130/711	21.00	20.10	0.709	0.100	1.23	0.872	16
			0	QPSK	Sensor on	100%	0	23060/704	21.00	20.23	0.657	0.011	1.19	0.784	/
			0	QPSK	Sensor on	100%	0	23095/707.5	21.00	19.90	0.648	0.021	1.29	0.835	/
			0	QPSK	Sensor on	100%	0	23130/711	21.00	20.07	0.689	0.038	1.24	0.854	/
		Front Side	0	QPSK	Sensor on	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
			0	QPSK	Sensor on	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Left Edge	0	QPSK	Sensor off	1	49	23060/704	25.00	23.74	0.043	0.010	1.34	0.057	/
			0	QPSK	Sensor off	50%	25	23060/704	24.00	22.87	0.080	0.190	1.30	0.104	/
		Right Edge	0	QPSK	Sensor on	1	25	23130/711	21.00	20.19	0.098	0.070	1.21	0.118	/
			0	QPSK	Sensor on	50%	25	23060/704	21.00	20.22	0.087	0.019	1.20	0.104	/
		Top Edge	0	N/A	Sensor off	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
			0	N/A	Sensor off	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Bottom Edge	0	QPSK	Sensor on	1	25	23130/711	21.00	20.19	0.332	0.024	1.21	0.400	/
			0	QPSK	Sensor on	50%	25	23060/704	21.00	20.22	0.329	0.080	1.20	0.394	/
LTE 13	ANT0	Back Side	0	QPSK	Sensor on	1	25	23230/782	21.50	20.70	0.751	0.029	1.20	0.903	/
			0	QPSK	Sensor on	50%	25	23230/782	21.50	20.71	0.773	0.033	1.20	0.927	17
			0	QPSK	Sensor on	100%	0	23230/782	21.50	20.59	0.753	0.070	1.23	0.929	/
		Front Side	0	QPSK	Sensor on	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
			0	QPSK	Sensor on	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Left Edge	0	QPSK	Sensor off	1	25	23230/782	25.00	23.30	0.077	-0.087	1.48	0.114	/
			0	QPSK	Sensor off	50%	25	23230/782	24.00	22.36	0.076	0.041	1.46	0.111	/
		Right Edge	0	QPSK	Sensor on	1	25	23230/782	21.50	20.70	0.102	0.031	1.20	0.123	/
			0	QPSK	Sensor on	50%	25	23230/782	21.50	20.71	0.111	-0.029	1.20	0.133	/
		Top Edge	0	N/A	Sensor off	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
			0	N/A	Sensor off	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Bottom Edge	0	QPSK	Sensor on	1	25	23230/782	21.50	20.70	0.343	0.050	1.20	0.412	/
			0	QPSK	Sensor on	50%	25	23230/782	21.50	20.71	0.328	0.017	1.20	0.393	/
LTE 26/5	ANT0	Back Side	0	QPSK	Sensor on	1	38	26915/836.5	22.50	21.54	0.751	0.160	1.25	0.937	/
			0	QPSK	Sensor on	1	38	26865/831.5	22.50	21.51	0.719	-0.080	1.26	0.903	/
			0	QPSK	Sensor on	1	38	26965/841.5	22.50	21.53	0.707	0.020	1.25	0.884	/

			0	QPSK	Sensor on	50%	18	26965/841.5	22.50	21.59	0.764	0.019	1.23	0.942	18
			0	QPSK	Sensor on	50%	18	26915/836.5	22.50	21.54	0.706	-0.059	1.25	0.881	/
			0	QPSK	Sensor on	50%	18	26865/831.5	22.50	21.52	0.718	0.046	1.25	0.900	/
			0	QPSK	Sensor on	100%	0	26915/836.5	22.50	21.51	0.720	-0.031	1.26	0.904	/
			0	QPSK	Sensor on	100%	0	26865/831.5	22.50	21.45	0.734	0.019	1.27	0.935	/
			0	QPSK	Sensor on	100%	0	26965/841.5	22.50	21.50	0.656	0.010	1.26	0.826	/
			0	QPSK	Sensor on	1	49	26740/819	22.50	21.61	0.716	0.068	1.23	0.879	/
			0	QPSK	Sensor on	50%	25	26740/819	22.50	21.55	0.754	-0.075	1.24	0.938	/
		Front Side	0	QPSK	Sensor on	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
			0	QPSK	Sensor on	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Left Edge	0	QPSK	Sensor off	1	38	26965/841.5	25.00	23.53	0.061	0.025	1.40	0.086	/
			0	QPSK	Sensor off	50%	18	26965/841.5	24.00	22.70	0.079	0.100	1.35	0.107	/
		Right Edge	0	QPSK	Sensor on	1	38	26915/836.5	22.50	21.54	0.090	0.011	1.25	0.112	/
			0	QPSK	Sensor on	50%	18	26965/841.5	22.50	21.55	0.116	0.054	1.24	0.144	/
		Top Edge	0	N/A	Sensor off	1	25	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
			0	N/A	Sensor off	50%	13	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Bottom Edge	0	QPSK	Sensor on	1	38	26915/836.5	22.50	21.54	0.264	0.021	1.25	0.329	/
			0	QPSK	Sensor on	50%	18	26965/841.5	22.50	21.55	0.278	-0.039	1.24	0.346	/
LTE 41/38 TDD	ANT0	Back Side	0	QPSK	Sensor on	1	50	41490/2680	19.50	18.88	0.515	0.049	1.15	0.594	19
			0	QPSK	Sensor on	50%	25	40185/2549.5	19.50	18.82	0.493	0.013	1.17	0.577	/
		Front Side	0	QPSK	Sensor on	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
			0	QPSK	Sensor on	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Left Edge	0	QPSK	Sensor off	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
			0	QPSK	Sensor off	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Right Edge	0	QPSK	Sensor on	1	50	41490/2680	19.50	18.88	0.275	0.018	1.15	0.317	/
			0	QPSK	Sensor on	50%	25	40185/2549.5	19.50	18.82	0.187	0.024	1.17	0.219	/
		Top Edge	0	N/A	Sensor off	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
			0	N/A	Sensor off	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Bottom Edge	0	QPSK	Sensor on	1	50	41490/2680	19.50	18.88	0.325	0.029	1.15	0.375	/
			0	QPSK	Sensor on	50%	25	40185/2549.5	19.50	18.82	0.357	-0.090	1.17	0.418	/
LTE 66/4	ANT0	Back Side	0	QPSK	Sensor on	1	50	132572/1770	20.50	19.88	0.644	0.087	1.15	0.743	/
			0	QPSK	Sensor on	50%	25	132572/1770	20.50	19.82	0.665	0.035	1.17	0.778	20
		Front Side	0	QPSK	Sensor on	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
			0	QPSK	Sensor on	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Left Edge	0	QPSK	Sensor off	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
			0	QPSK	Sensor off	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Right Edge	0	QPSK	Sensor on	1	50	132572/1770	20.50	19.88	0.231	0.027	1.15	0.266	/
			0	QPSK	Sensor on	50%	25	132572/1770	20.50	19.82	0.218	0.090	1.17	0.255	/
		Top Edge	0	N/A	Sensor off	1	50	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
			0	N/A	Sensor off	50%	25	N/A	N/A	N/A	N/A	N/A	N/A	N/A	/
		Bottom Edge	0	QPSK	Sensor on	1	50	132572/1770	20.50	19.88	0.442	0.025	1.15	0.510	/
			0	QPSK	Sensor on	50%	25	132572/1770	20.50	19.82	0.400	0.017	1.17	0.468	/

Band	Antenna	Test Position	Dist. (mm)	Mode	Duty Cycle	Power Reduction	Ch./Freq. (MHz)	Tune-up (dBm)	Measured power (dBm)	Measured SAR1g (W/Kg)	Power Drift (dB)	Scaling Factor	Report SAR1g (W/kg)	Plot No.
2.4G	ANT2	Back Side	0	802.11b	97.2%	Sensor on	6/2437	14.50	13.90	0.392	0.041	1.18	0.463	21
		Front Side	0	802.11b	97.2%	Sensor on	NA	NA	NA	NA	NA	NA	NA	/
		Left Edge	0	802.11b	97.2%	Sensor off	NA	NA	NA	NA	NA	NA	NA	/
		Right Edge	0	802.11b	97.2%	Sensor on	6/2437	14.50	13.90	0.127	0.090	1.18	0.150	/
		Top Edge	0	802.11b	97.2%	Sensor off	6/2437	22.00	21.04	0.078	0.180	1.28	0.100	/
		Bottom Edge	0	802.11b	97.2%	Sensor off	NA	NA	NA	NA	NA	NA	NA	/
Wi-Fi U-NII-2A	ANT2	Back Side	0	802.11a	85.0%	Sensor on	64/5320	9.50	8.93	0.382	0.013	1.34	0.512	/
		Front Side	0	802.11a	85.0%	Sensor on	NA	NA	NA	NA	NA	NA	NA	/
		Left Edge	0	802.11a	85.0%	Sensor off	NA	NA	NA	NA	NA	NA	NA	/
		Right Edge	0	802.11a	85.0%	Sensor on	64/5320	9.50	8.93	0.124	0.017	1.34	0.166	/
		Top Edge	0	802.11ax-HE40	69.0%	Sensor off	54/5270	16.50	14.96	0.133	0.150	2.07	0.275	/
		Bottom Edge	0	802.11a	85.0%	Sensor off	NA	NA	NA	NA	NA	NA	NA	/
Wi-Fi U-NII-2C	ANT2	Back Side	0	802.11a	85.0%	Sensor on	100/5500	8.00	7.44	0.391	0.150	1.34	0.523	22
		Front Side	0	802.11a	85.0%	Sensor on	NA	NA	NA	NA	NA	NA	NA	/
		Left Edge	0	802.11a	85.0%	Sensor off	NA	NA	NA	NA	NA	NA	NA	/
		Right Edge	0	802.11a	85.0%	Sensor on	100/5500	8.00	7.44	0.119	-0.019	1.34	0.159	/
		Top Edge	0	802.11ax-HE160	41.0%	Sensor off	114/5570	18.50	17.50	0.145	-0.035	3.07	0.445	/
		Bottom Edge	0	802.11a	85.0%	Sensor off	NA	NA	NA	NA	NA	NA	NA	/
Wi-Fi U-NII-3	ANT2	Back Side	0	802.11a	85.0%	Sensor on	149/5745	7.50	6.73	0.365	0.110	1.40	0.513	/
		Front Side	0	802.11a	85.0%	Sensor on	NA	NA	NA	NA	NA	NA	NA	/
		Left Edge	0	802.11a	85.0%	Sensor off	NA	NA	NA	NA	NA	NA	NA	/
		Right Edge	0	802.11a	85.0%	Sensor on	149/5745	7.50	6.73	0.139	0.039	1.40	0.195	/
		Top Edge	0	802.11ac VHT80	58.0%	Sensor off	157/5785	15.50	14.73	0.169	0.027	2.06	0.348	/
		Bottom Edge	0	802.11a	85.0%	Sensor off	NA	NA	NA	NA	NA	NA	NA	/
Bluetooth	ANT2	Back Side	0	GFSK	77.0%	Full Power	39/2441	13.50	12.10	0.067	0.060	1.79	0.120	23
		Front Side	0	GFSK	77.0%	Full Power	NA	NA	NA	NA	NA	NA	NA	/
		Left Edge	0	GFSK	77.0%	Full Power	NA	NA	NA	NA	NA	NA	NA	/
		Right Edge	0	GFSK	77.0%	Full Power	39/2441	13.50	12.10	0.025	0.012	1.79	0.045	/
		Top Edge	0	GFSK	77.0%	Full Power	39/2441	13.50	12.10	0.010	0.019	1.79	0.018	/
		Bottom Edge	0	GFSK	77.0%	Full Power	NA	NA	NA	NA	NA	NA	NA	/

Additional SAR test at a conservative distance (triggering distance minus 1mm)

Band	Antenna	Dist. (mm)	Test Position	Mode	Power Reduction	RB	Offset	Ch./Freq. (MHz)	Tune-up (dBm)	Measured power (dBm)	Measured SAR1g (W/Kg)	Power Drift (dB)	Scaling Factor	Report SAR1g (W/kg)	Plot No.
GSM850	ANT0	25	Back Side	4TX	Sensor off	N/A	N/A	190/836.6	29.00	28.62	0.312	0.035	1.09	0.341	/
		17	Right Edge	4TX	Sensor off	N/A	N/A	190/836.6	29.00	28.62	0.075	0.018	1.09	0.082	/

		21	Bottom Edge	4TX	Sensor off	N/A	N/A	190/836.6	29.00	28.62	0.213	0.026	1.09	0.232	/
GSM1900	ANT0	25	Back Side	3TX	Sensor off	N/A	N/A	661/1880	28.00	26.91	0.206	0.160	1.29	0.265	/
		17	Right Edge	3TX	Sensor off	N/A	N/A	661/1880	28.00	26.91	0.065	-0.020	1.29	0.084	/
		21	Bottom Edge	3TX	Sensor off	N/A	N/A	661/1880	28.00	26.91	0.198	0.050	1.29	0.254	/
WCDMA II	ANT0	25	Back Side	RMC	Sensor off	N/A	N/A	9400/1880	24.00	22.75	0.209	0.030	1.33	0.279	/
		17	Right Edge	RMC	Sensor off	N/A	N/A	9400/1880	24.00	22.75	0.145	0.140	1.33	0.193	/
		21	Bottom Edge	RMC	Sensor off	N/A	N/A	9400/1880	24.00	22.75	0.186	0.084	1.33	0.248	/
WCDMA V	ANT0	25	Back Side	RMC	Sensor off	N/A	N/A	4183/836.6	24.00	22.73	0.258	0.035	1.34	0.346	/
		17	Right Edge	RMC	Sensor off	N/A	N/A	4183/836.6	24.00	22.73	0.086	0.011	1.34	0.115	/
		21	Bottom Edge	RMC	Sensor off	N/A	N/A	4183/836.6	24.00	22.73	0.192	-0.190	1.34	0.257	/
LTE 2	ANT0	25	Back Side	QPSK	Sensor off	1	50	18700/1860	24.50	23.17	0.132	0.023	1.36	0.179	/
		17	Right Edge	QPSK	Sensor off	1	50	18700/1860	24.50	23.17	0.065	0.023	1.36	0.088	/
		21	Bottom Edge	QPSK	Sensor off	1	50	18700/1860	24.50	23.17	0.107	0.035	1.36	0.145	/
LTE 7	ANT0	25	Back Side	QPSK	Sensor off	1	50	21100/2535	24.50	22.91	0.543	-0.190	1.44	0.783	/
		17	Right Edge	QPSK	Sensor off	1	50	21100/2535	24.50	22.91	0.383	0.029	1.44	0.552	/
		21	Bottom Edge	QPSK	Sensor off	1	50	21100/2535	24.50	22.91	0.527	0.015	1.44	0.760	/
LTE 12	ANT0	25	Back Side	QPSK	Sensor off	1	49	23060/704	25.00	23.74	0.193	0.026	1.34	0.258	/
		17	Right Edge	QPSK	Sensor off	1	49	23060/704	25.00	23.74	0.082	-0.100	1.34	0.110	/
		21	Bottom Edge	QPSK	Sensor off	1	49	23060/704	25.00	23.74	0.142	0.026	1.34	0.190	/
LTE 13	ANT0	25	Back Side	QPSK	Sensor off	1	25	23230/782	25.00	23.30	0.247	-0.120	1.48	0.365	/
		17	Right Edge	QPSK	Sensor off	1	25	23230/782	25.00	23.30	0.077	-0.106	1.48	0.114	/
		21	Bottom Edge	QPSK	Sensor off	1	25	23230/782	25.00	23.30	0.208	-0.028	1.48	0.308	/
LTE 26	ANT0	25	Back Side	QPSK	Sensor off	1	38	26965/841.5	25.00	23.53	0.341	-0.037	1.40	0.478	/
		17	Right Edge	QPSK	Sensor off	1	38	26965/841.5	25.00	23.53	0.126	0.050	1.40	0.177	/
		21	Bottom Edge	QPSK	Sensor off	1	38	26965/841.5	25.00	23.53	0.227	0.015	1.40	0.318	/
LTE 41	ANT0	25	Back Side	QPSK	Sensor off	1	50	41490/2680	24.50	22.90	0.456	0.070	1.45	0.659	/
		17	Right Edge	QPSK	Sensor off	1	50	41490/2680	24.50	22.90	0.160	0.015	1.45	0.231	/
		21	Bottom Edge	QPSK	Sensor off	1	50	41490/2680	24.50	22.90	0.243	0.190	1.45	0.351	/
LTE 66	ANT0	25	Back Side	QPSK	Sensor off	1	50	132322/1745	24.50	23.13	0.307	0.120	1.37	0.421	/
		17	Right Edge	QPSK	Sensor off	1	50	132322/1745	24.50	23.13	0.252	-0.030	1.37	0.345	/
		21	Bottom Edge	QPSK	Sensor off	1	50	132322/1745	24.50	23.13	0.212	0.029	1.37	0.291	/

Band	Antenna	Test Position	Dist. (mm)	Mode	Duty Cycle	Power Reduction	Ch./Freq. (MHz)	Tune-up (dBm)	Measured power (dBm)	Measured SAR1g (W/Kg)	Power Drift (dB)	Scaling Factor	Report SAR1g (W/kg)	Plot No.
2.4G	ANT2	Back Side	25	802.11b	97.2%	Sensor off	6/2437	22.00	21.04	0.089	0.180	1.28	0.114	/
		Right Edge	17	802.11b	97.2%	Sensor off	6/2437	22.00	21.04	0.085	0.021	1.28	0.109	/
Wi-Fi U-NII-2A	ANT2	Back Side	25	802.11ax-HE40	69.0%	Sensor off	54/5270	16.50	14.96	0.078	0.149	2.07	0.161	/
		Right Edge	17	802.11ax-HE40	69.0%	Sensor off	54/5270	16.50	14.96	0.066	-0.170	2.07	0.136	/
Wi-Fi U-NII-2C	ANT2	Back Side	25	802.11ax-HE160	41.0%	Sensor off	114/5570	18.50	17.50	0.169	0.160	3.07	0.519	/
		Right Edge	17	802.11ax-HE160	41.0%	Sensor off	114/5570	18.50	17.50	0.108	0.026	3.07	0.332	/
Wi-Fi U-NII-3	ANT2	Back Side	25	802.11a	85.0%	Sensor off	157/5785	15.50	14.73	0.135	0.090	1.40	0.190	/
		Right Edge	17	802.11a	85.0%	Sensor off	157/5785	15.50	14.73	0.086	0.016	1.40	0.121	/

10.3 Simultaneous Transmission Analysis

Simultaneous Transmission Configurations	Body
WWAN Antenna + Wi-Fi 2.4GHz Antenna	Yes
WWAN Antenna + Wi-Fi 5GHz Antenna + Bluetooth Antenna	Yes
WWAN Antenna + Bluetooth Antenna	Yes

General Note:

1. The Scaled SAR summation is calculated based on the same configuration and test position.
2. Per KDB 447498 D01, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation $< 1.6\text{W/kg}$, simultaneously transmission SAR measurement is not necessary.
 - ii) $\text{SPLSR} = (\text{SAR1} + \text{SAR2})^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.

The Maximum SAR_{10g} Value (WWAN-Antenna)

SAR _{10g} (W/kg)		GSM	GSM	WCDMA	WCDMA	LTE	LTE	LTE	LTE	LTE	LTE	LTE	MAX.
Test Position		850	1900	2	5	2	7	12(17)	13	26(5)	41(38)	66	SAR _{10g}
Body SAR	Back Side	0.935	0.932	0.806	0.710	0.863	0.948	0.872	0.929	0.942	0.594	0.778	0.948
	Front Side	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	0.000
	Left Edge	0.093	N/A	N/A	0.090	N/A	N/A	0.100	0.114	0.099	N/A	N/A	0.114
	Right Edge	0.117	0.421	0.288	0.129	0.328	0.268	0.118	0.133	0.144	0.317	0.266	0.421
	Top Edge	0.023	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	0.023
	Bottom Edge	0.241	0.762	0.557	0.350	0.469	0.630	0.400	0.412	0.346	0.418	0.510	0.762

About Bluetooth, Wi-Fi and WWAN Antenna

SAR _{1g/10g} (W/kg)		Main-Antenna	Wi-Fi 2.4GHz	Wi-Fi 5GHz			Bluetooth	MAX. ΣSAR _{1g/10g}		
				U-NII-2A (U-NII-1)	U-NII-2C	U-NII-3				
				3	4	5		1+2	1+MAX (3-5) +6	1+6
Body SAR	Back Side	0.948	0.463	0.512	0.523	0.513	0.120	1.411	1.592	1.069
	Front Side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Left Edge	0.114	0.000	0.000	0.000	0.000	0.000	0.114	0.114	0.114
	Right Edge	0.421	0.150	0.166	0.159	0.195	0.045	0.571	0.661	0.466
	Top Edge	0.023	0.100	0.275	0.445	0.348	0.018	0.123	0.486	0.041
	Bottom Edge	0.762	0.000	0.000	0.000	0.000	0.000	0.762	0.762	0.762

Note:

1. The value with blue color is the maximum ΣSAR_{1g/10g} Value.
2. MAX. ΣSAR_{1g/10g} =Unlicensed SAR_{MAX} +Licensed SAR_{MAX}
3. MAX. ΣSAR_{1g} =1.592W/kg<1.6W/kg, and the max TER=0.995<1. so the Simultaneous transmission SAR with volume scan are not required for Bluetooth, Wi-Fi and WWAN Antenna

11 Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528- 2013 is not required in SAR reports submitted for equipment approval.

ANNEX A: Test Layout



Tissue Simulating Liquids

For the measurement of the field distribution inside the flat phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For Head and Body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Picture 3.



Picture 3: Liquid depth in the flat Phantom

ANNEX B: System Check Results

Plot 1 System Performance Check at 750 MHz TSL

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3

Date: 2026/3/17

Communication System: CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.88 \text{ S/m}$; $\epsilon_r = 42.3$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.80, 9.80, 9.80); Calibrated: 2025/5/28

Electronics: DAE4 Sn1317; Calibrated: 2025/11/19

Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1058

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

d=15mm, Pin=250mW/Area Scan (4x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 2.15 W/kg

d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 50.165V/m ; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 3.16 W/kg

SAR(1 g) = 2.13 W/kg ; SAR(10 g) = 1.41 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 62.5%

Maximum value of SAR (measured) = 2.29 W/kg

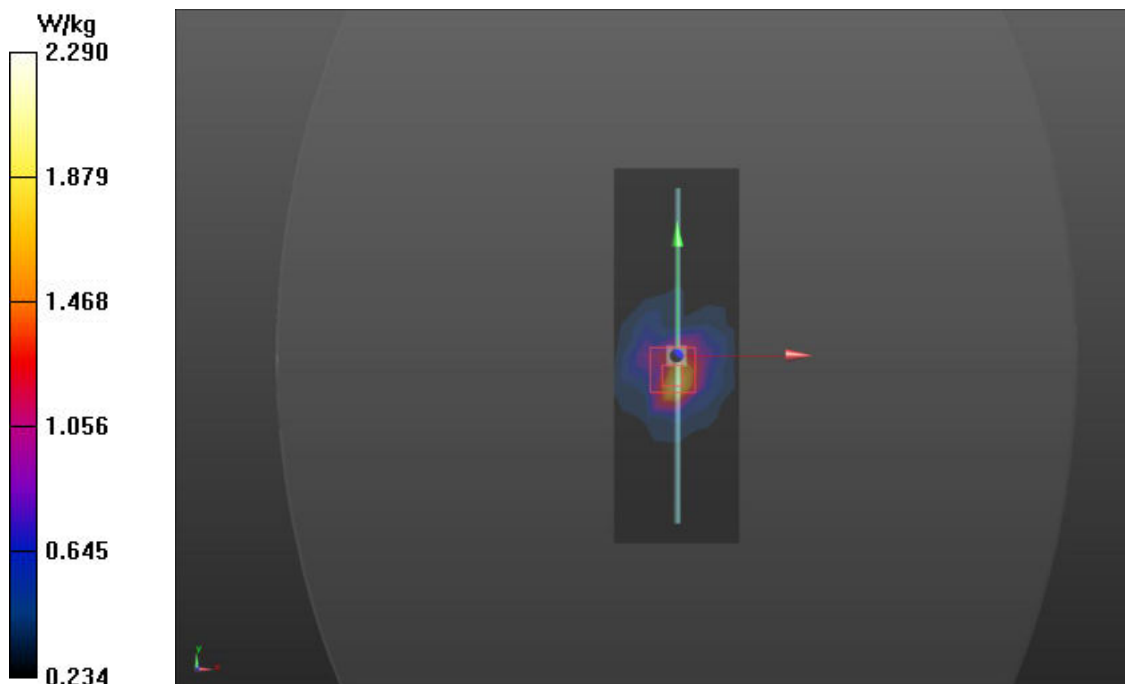

Plot 2 System Performance Check at 835 MHz TSL

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2

Date: 2026/3/18

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.88 \text{ S/m}$; $\epsilon_r = 41.4$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.42, 9.42, 9.42); Calibrated: 2025/5/28

Electronics: DAE4 Sn1317; Calibrated: 2025/11/19

Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1058

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

d=15mm, Pin=250mW/Area Scan (4x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 2.58 W/kg

d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.241 V/m ; Power Drift = -0.076 dB


Peak SAR (extrapolated) = 3.67 W/kg

SAR(1 g) = 2.44 W/kg ; SAR(10 g) = 1.6 W/kg

Smallest distance from peaks to all points 3 dB below = 16.6 mm

Ratio of SAR at M2 to SAR at M1 = 68.1%

Maximum value of SAR (measured) = 2.64 W/kg

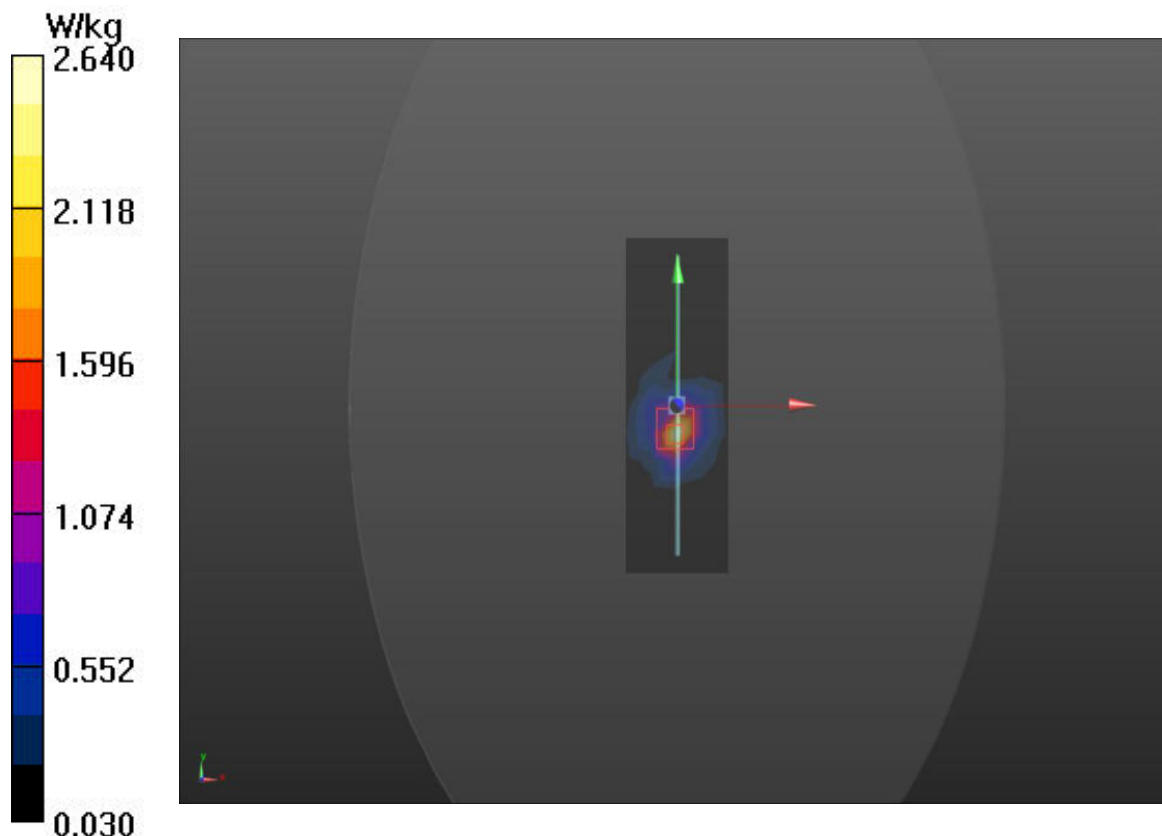

Plot 3 System Performance Check at 1750 MHz TSL

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2

Date: 2026/3/19

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.29, 8.29, 8.29); Calibrated: 2025/5/28

Electronics: DAE4 Sn1317; Calibrated: 2025/11/19

Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1058

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=250mW/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 9.18 W/kg

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 80.385 V/m; Power Drift = 0.075 dB


Peak SAR (extrapolated) = 15.5 W/kg

SAR(1 g) = 8.95 W/kg; SAR(10 g) = 4.8 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 53.5%

Maximum value of SAR (measured) = 9.46 W/kg

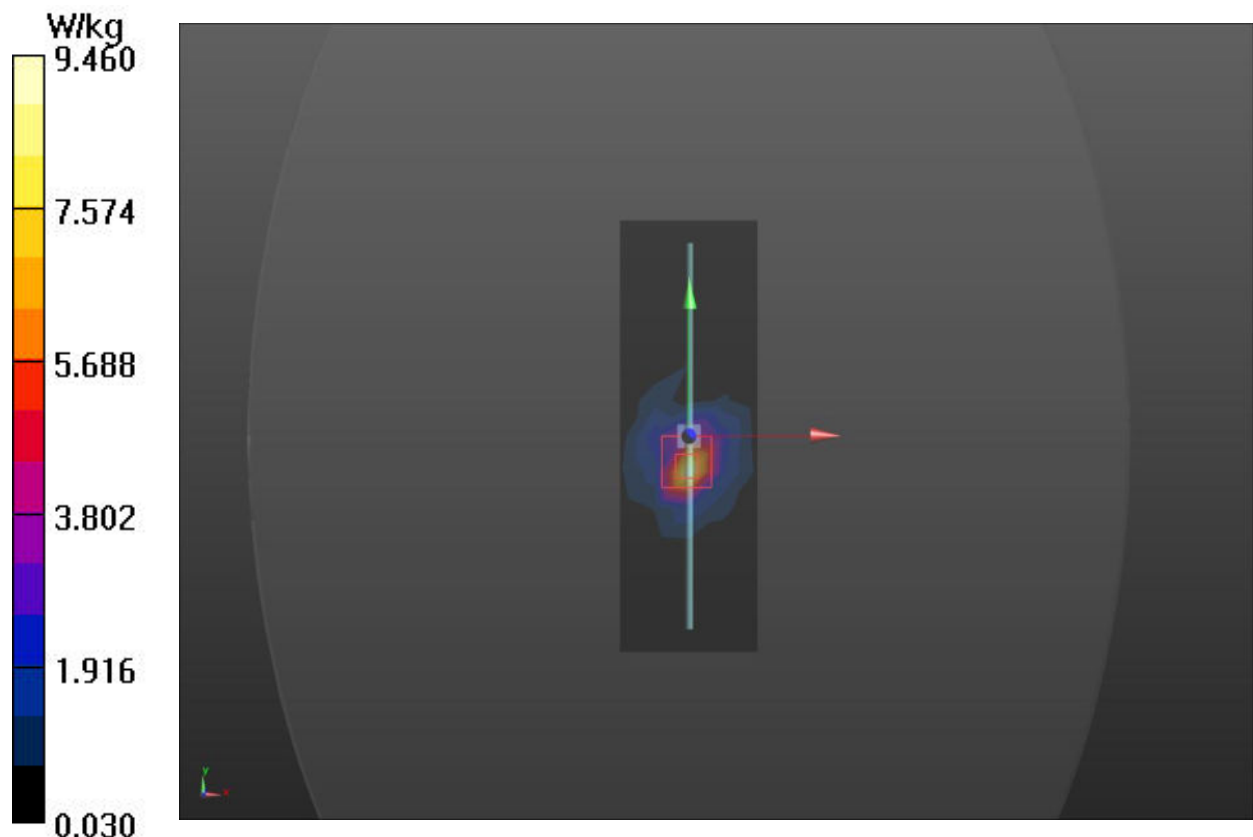

Plot 4 System Performance Check at 1900 MHz TSL

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2

Date: 2026/3/20

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 40.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 2025/5/28

Electronics: DAE4 Sn1317; Calibrated: 2025/11/19

Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1058

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=250mW/Area Scan (4x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 10.23 W/kg

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 85.857V/m; Power Drift = 0.026 dB


Peak SAR (extrapolated) = 17.84 W/kg

SAR(1 g) = 9.88 W/kg; SAR(10 g) = 4.9 W/kg

Smallest distance from peaks to all points 3 dB below = 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 52.7%

Maximum value of SAR (measured) = 10.70 W/kg

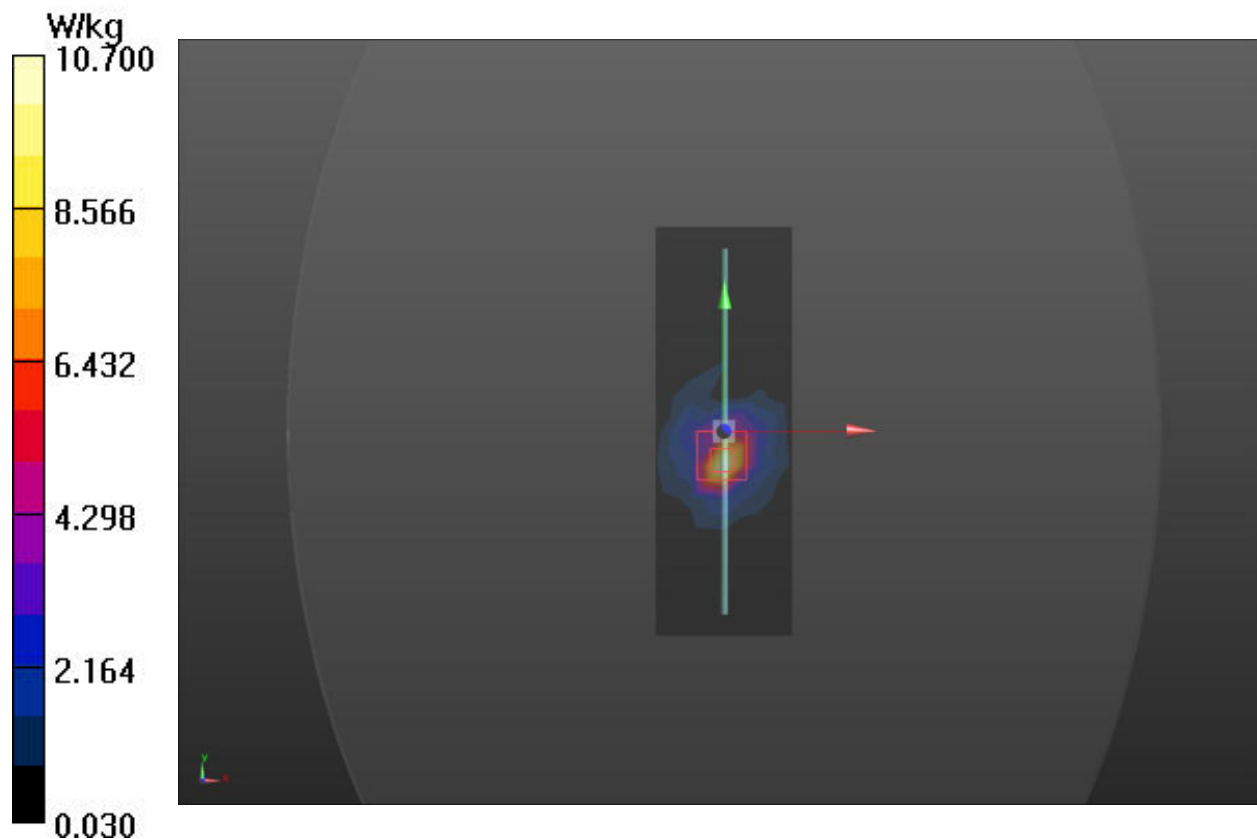

Plot 5 System Performance Check at 2450 MHz TSL

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2

Date: 2026/3/21

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.53, 7.53, 7.53); Calibrated: 2025/5/28

Electronics: DAE4 Sn1317; Calibrated: 2025/11/19

Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1058

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=250mW/Area Scan (4x7x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 14.26 W/kg

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.834 V/m; Power Drift = 0.015 dB


Peak SAR (extrapolated) = 30.10 W/kg

SAR(1 g) = 13.7 W/kg; SAR(10 g) = 6.22 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 47%

Maximum value of SAR (measured) = 15.90 W/kg

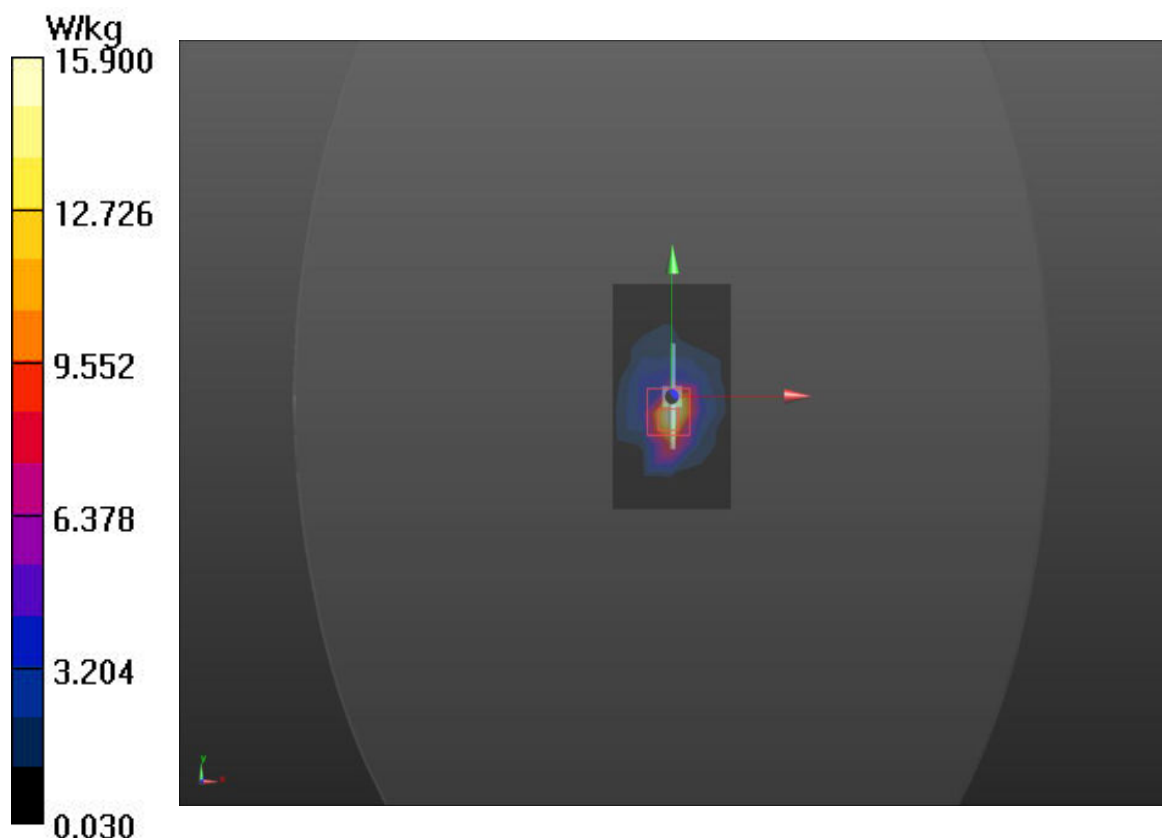

Plot 6 System Performance Check at 2600 MHz TSL

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2

Date: 2026/3/22

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.01$ S/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.38, 7.38, 7.38); Calibrated: 2025/5/28

Electronics: DAE4 Sn1317; Calibrated: 2025/11/19

Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1058

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=250mW/Area Scan (4x7x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 14.43 W/kg

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.998 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 31.85W/kg

SAR(1 g) = 13.9 W/kg; SAR(10 g) = 6.07 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 44.2%

Maximum value of SAR (measured) = 15.62 W/kg

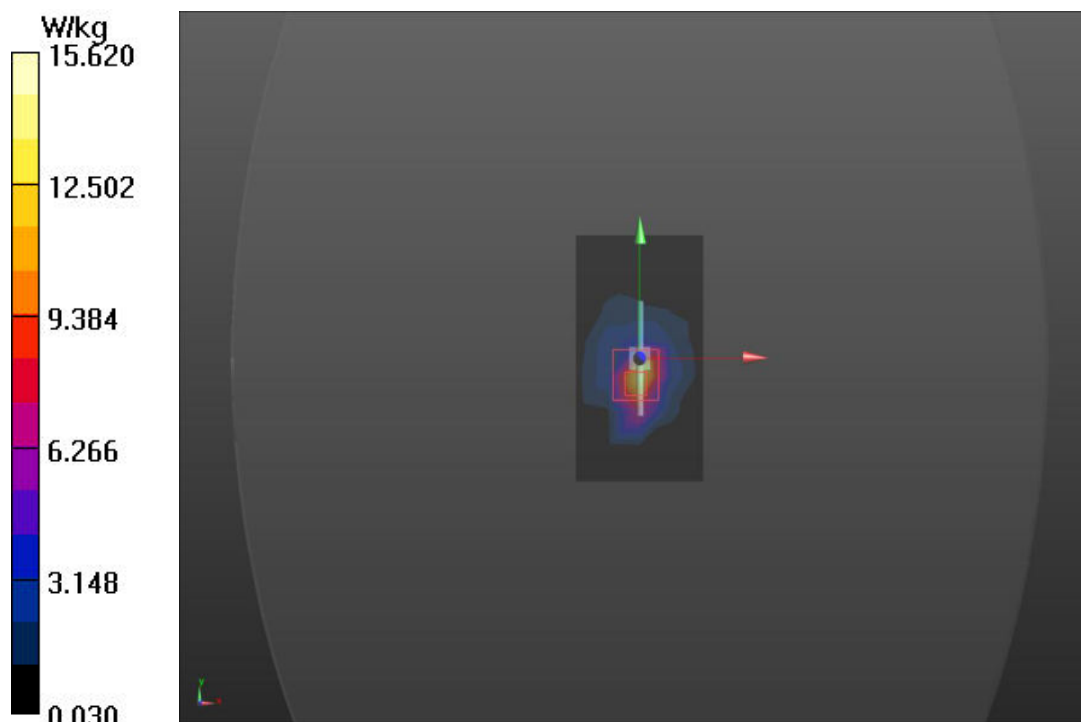

Plot 7 System Performance Check at 5250 MHz TSL

DUT: Dipole 5250 MHz; Type: D5GHzV2; Serial: D5GHzV2

Date: 2026/3/23

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.80$ S/m; $\epsilon_r = 35.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(5.50, 5.50, 5.50); Calibrated: 2025/5/28

Electronics: DAE4 Sn1317; Calibrated: 2025/11/19

Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1058

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=100mW/Area Scan (6x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 9.14 W/kg

d=10mm, Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 33.654 V/m; Power Drift = -0.095 dB


Peak SAR (extrapolated) = 52.20 W/kg

SAR(1 g) = 7.87 W/kg; SAR(10 g) = 2.25 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 63%

Maximum value of SAR (measured) = 9.73 W/kg

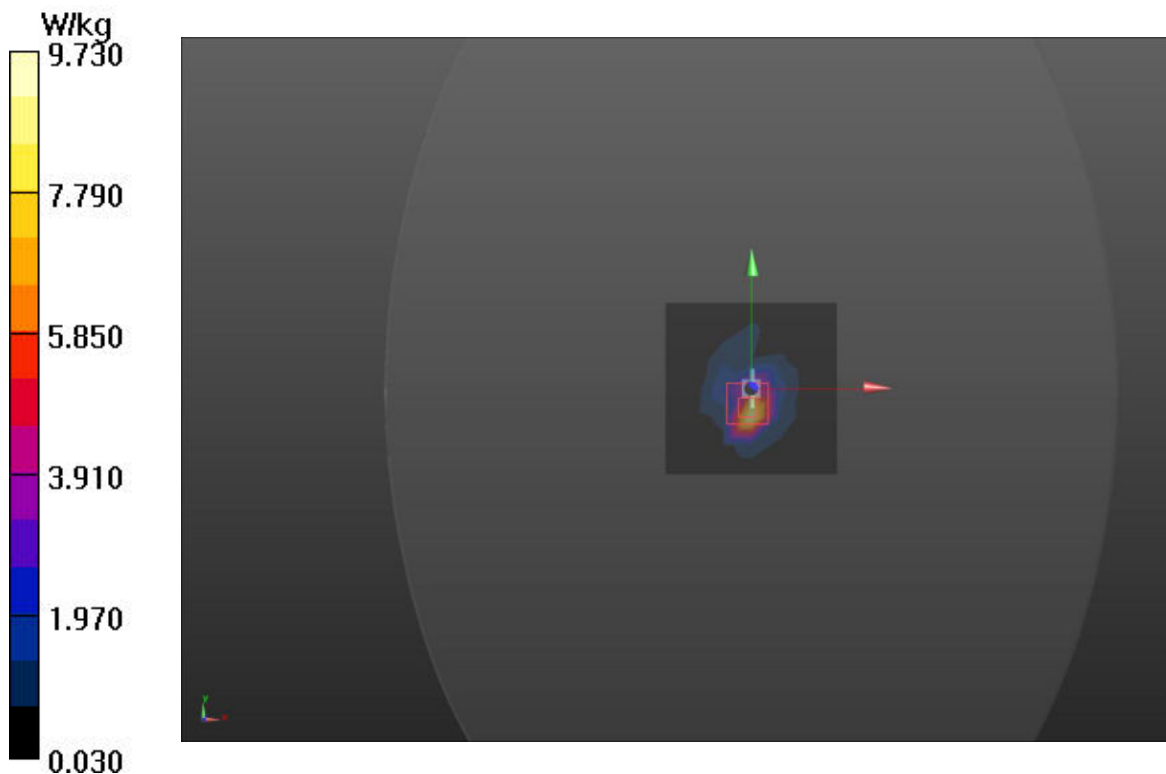

Plot 8 System Performance Check at 5600 MHz TSL

DUT: Dipole 5600 MHz; Type: D5GHzV2; Serial: D5GHzV2

Date: 2026/3/23

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.21$ S/m; $\epsilon_r = 34.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(4.90, 4.90, 4.90); Calibrated: 2025/5/28

Electronics: DAE4 Sn1317; Calibrated: 2025/11/19

Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1058

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=100mW/Area Scan (6x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 8.25 W/kg

d=10mm, Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 23.142 V/m; Power Drift = -0.028 dB


Peak SAR (extrapolated) = 22.9 W/kg

SAR(1 g) = 7.67 W/kg; SAR(10 g) = 2.27 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 61.9%

Maximum value of SAR (measured) = 8.67 W/kg

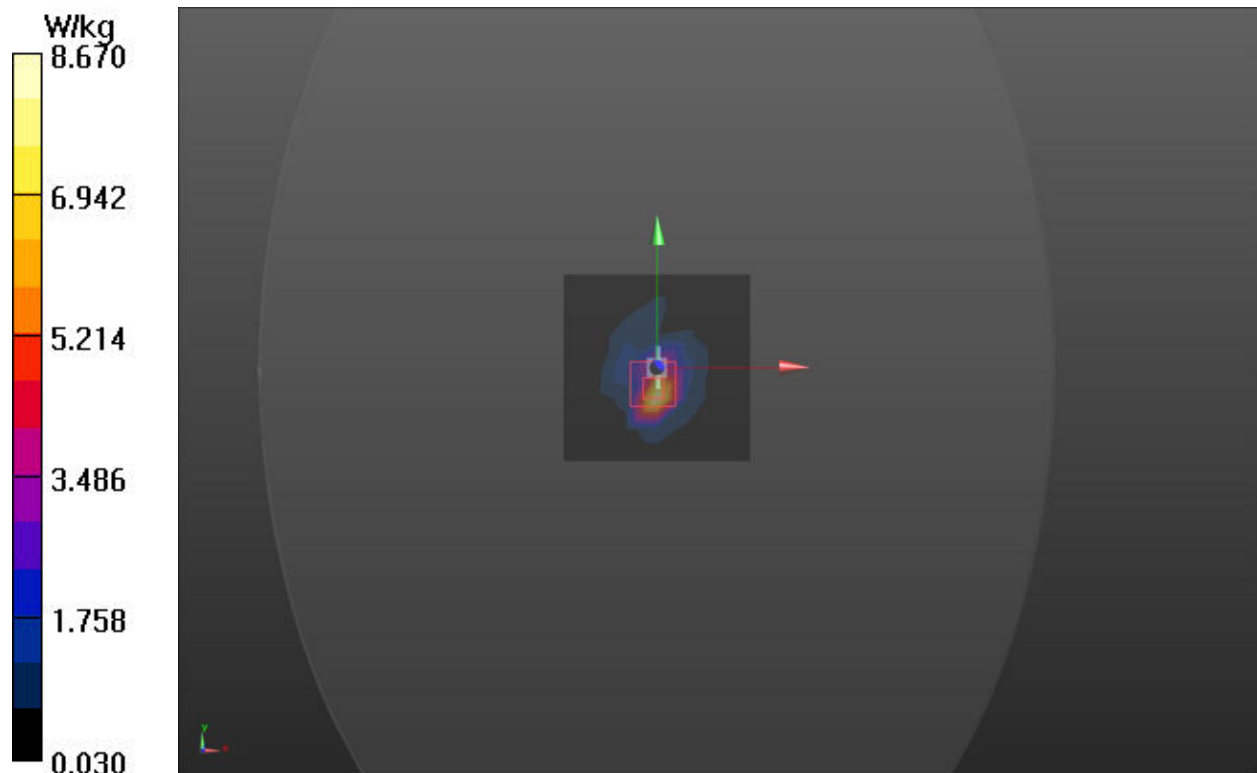

Plot 9 System Performance Check at 5750 MHz TSL

DUT: Dipole 5750 MHz; Type: D5GHzV2; Serial: D5GHzV2

Date: 2026/3/23

Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.21$ S/m; $\epsilon_r = 34.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(5.01, 5.01, 5.01); Calibrated: 2025/5/28

Electronics: DAE4 Sn1317; Calibrated: 2025/11/19

Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1058

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

d=10mm, Pin=100mW/Area Scan (6x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 8.31 W/kg

d=10mm, Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 25.26 V/m; Power Drift = 0.044 dB


Peak SAR (extrapolated) = 23.4 W/kg

SAR(1 g) = 7.66 W/kg; SAR(10 g) = 2.27 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 59.4%

Maximum value of SAR (measured) = 8.98 W/kg

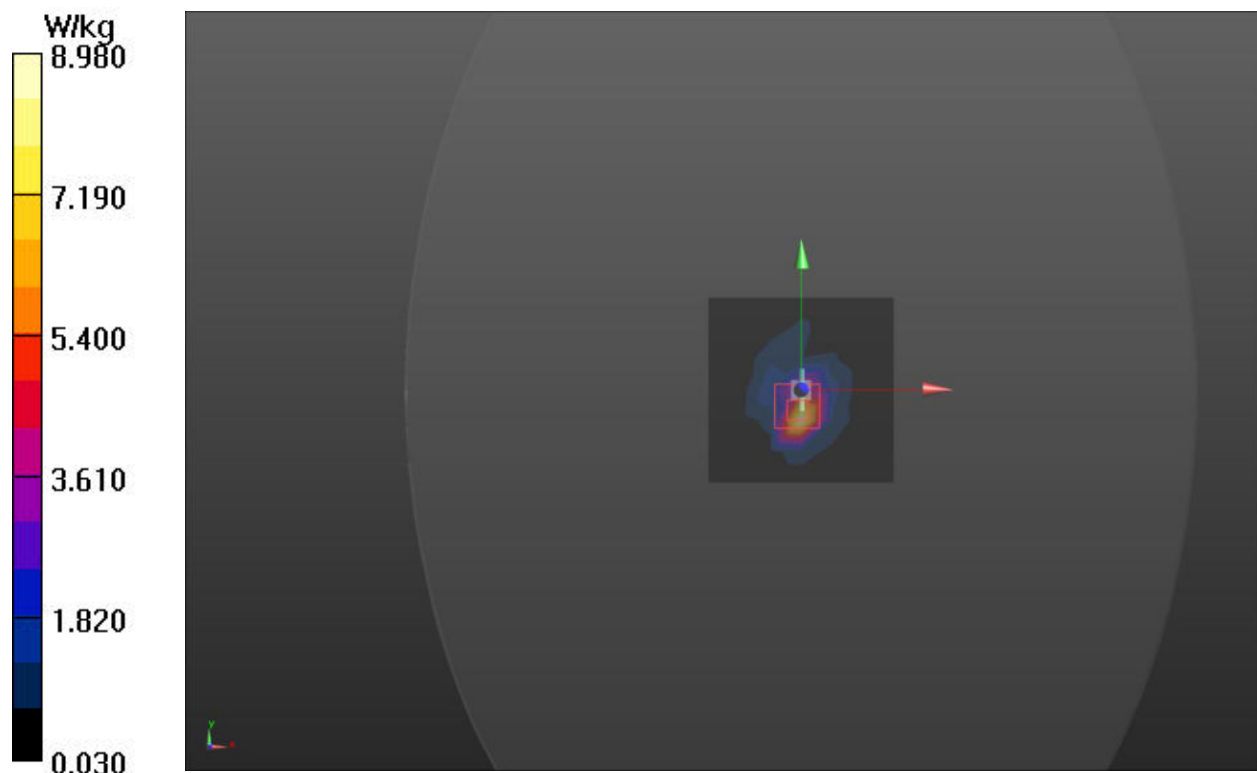

ANNEX C: Highest Graph Results

Plot 10 GSM 850 GPRS (4Txslots) Back Side Middle (Distance 0mm)

Date: 2026/3/18

Communication System: UID 0, GPRS 4TX (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.07

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.944$ S/m; $\epsilon_r = 41.288$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.42, 9.42, 9.42); Calibrated: 2025/5/28

Electronics: DAE4 Sn1317; Calibrated: 2025/11/19

Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1058

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

GSM 850 GPRS(4TX) Back Side 0mm/Mid/Area Scan (11x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.85 W/kg

GSM 850 GPRS(4TX) Back Side 0mm/Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.90 V/m; Power Drift = -0.030 dB


Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.816 W/kg; SAR(10 g) = 0.424 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 55.3%

Maximum value of SAR (measured) = 0.916 W/kg

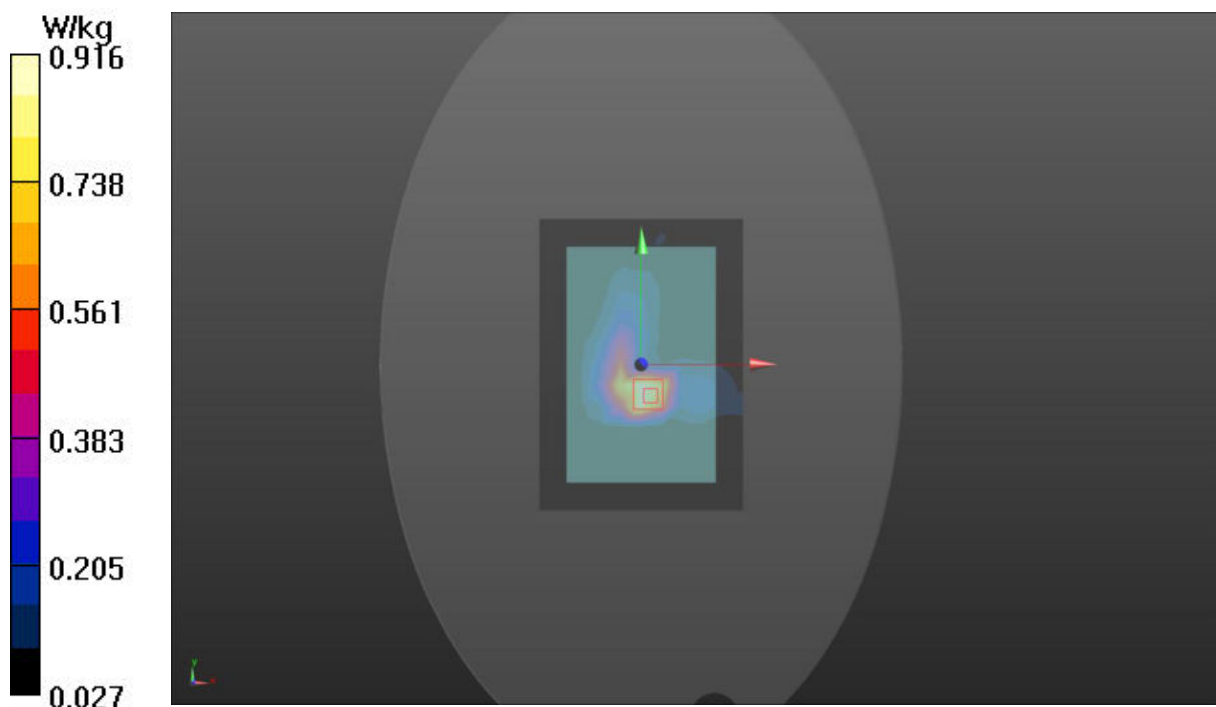

Plot 11 GSM 1900 GPRS (3Txslots) Back Side Middle (Distance 0mm)

Date: 2026/3/20

Communication System: UID 0, GPRS 3TX (0); Frequency: 1880 MHz; Duty Cycle: 1:2.77

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 39.087$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 2025/5/28

Electronics: DAE4 Sn1317; Calibrated: 2025/11/19

Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1058

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

GSM 1900 GPRS(3TX) Back Side 0mm/Mid/Area Scan (11x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.812 W/kg

GSM 1900 GPRS(3TX) Back Side 0mm/Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.07 V/m; Power Drift = 0.032 dB


Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.702 W/kg; SAR(10 g) = 0.350 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.3%

Maximum value of SAR (measured) = 0.856 W/kg

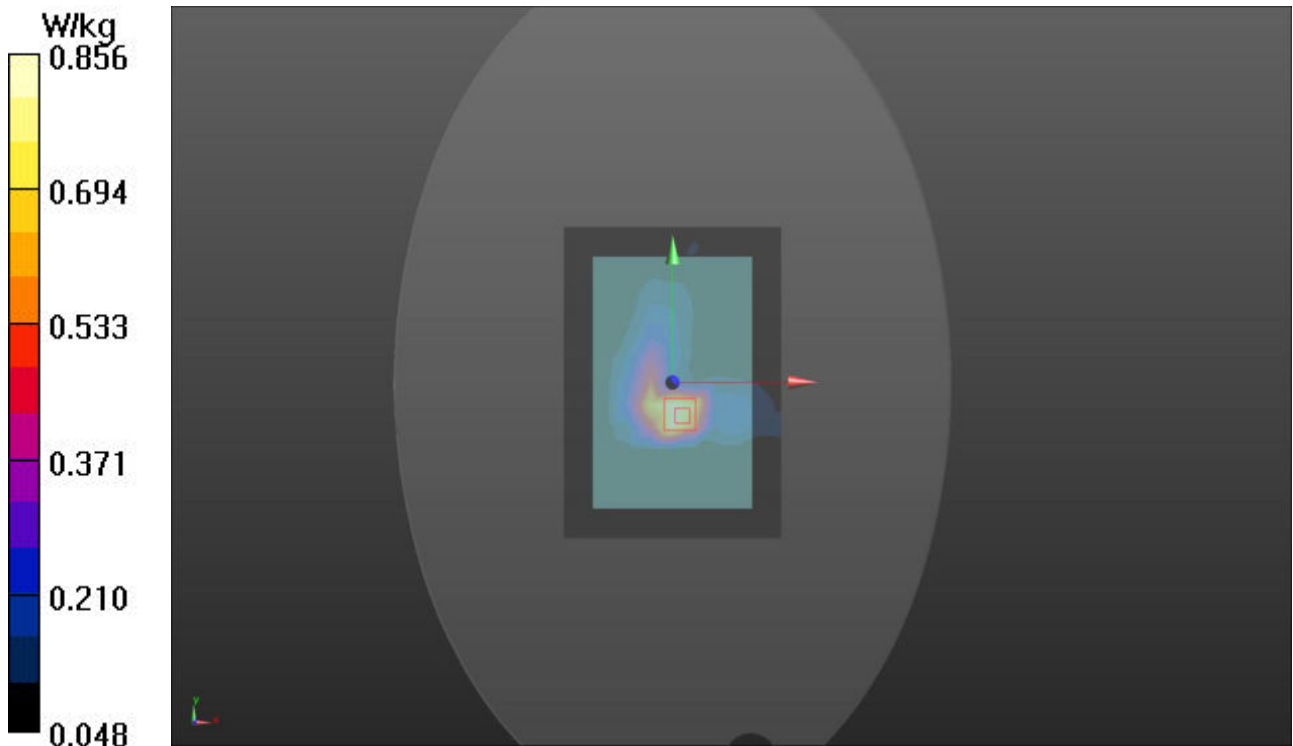

Plot 12 WCDMA Band 2 Back Side Low (Distance 0mm)

Date: 2026/3/20

Communication System: UID 0, WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.357$ S/m; $\epsilon_r = 38.598$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 2025/5/28

Electronics: DAE4 Sn1317; Calibrated: 2025/11/19

Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1058

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

WCDMA B2 Back Side 0mm/Low/ Area Scan (11x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.76 W/kg

WCDMA B2 Back Side 0mm/Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.56 V/m; Power Drift = 0.027 dB


Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 0.689 W/kg; SAR(10 g) = 0.350 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.3%

Maximum value of SAR (measured) = 0.800 W/kg

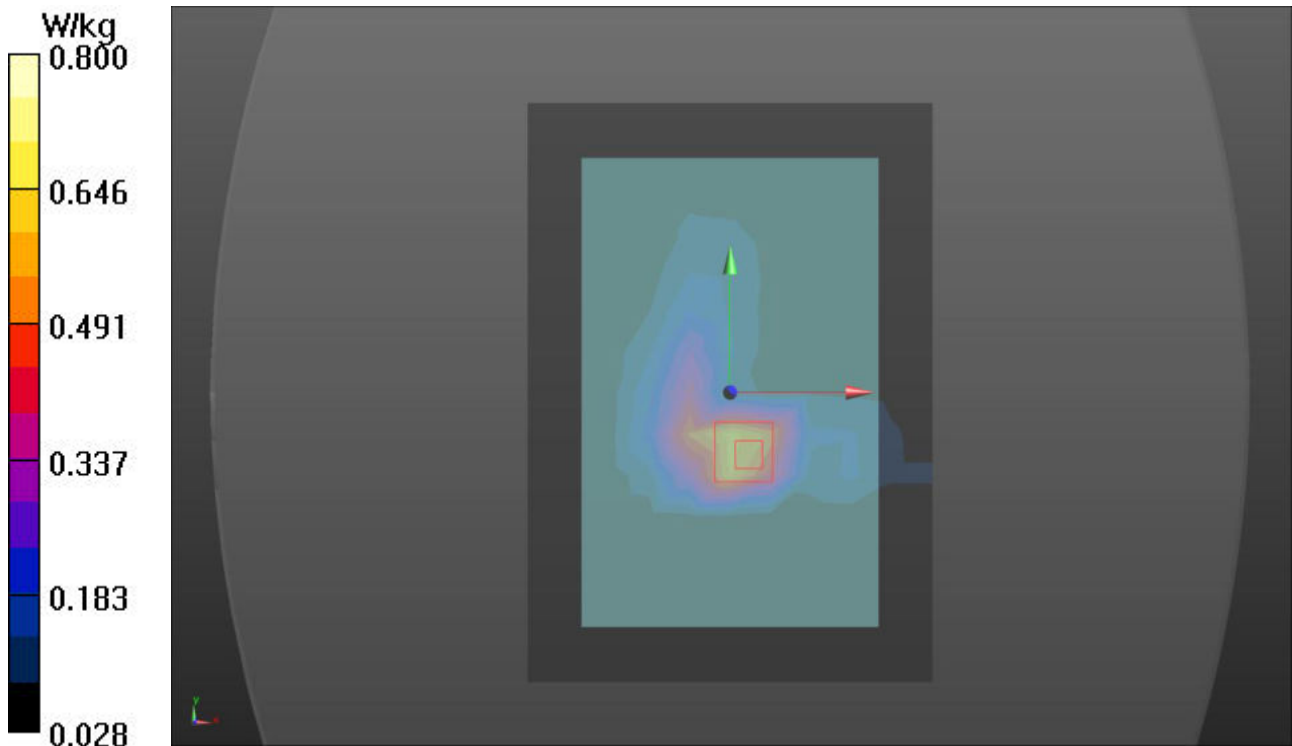

Plot 13 WCDMA Band 5 Back Side Middle (Distance 0mm)

Date: 2026/3/18

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.944$ S/m; $\epsilon_r = 41.288$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.42, 9.42, 9.42); Calibrated: 2025/5/28

Electronics: DAE4 Sn1317; Calibrated: 2025/11/19

Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1058

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

WM28+ WCDMA B5 Back Side 0mm/Mid/Area Scan (11x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.70 W/kg

WM28+ WCDMA B5 Back Side 0mm/Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.23 V/m; Power Drift = 0.039 dB


Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 0.613 W/kg; SAR(10 g) = 0.335 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 61.9%

Maximum value of SAR (measured) = 0.820 W/kg

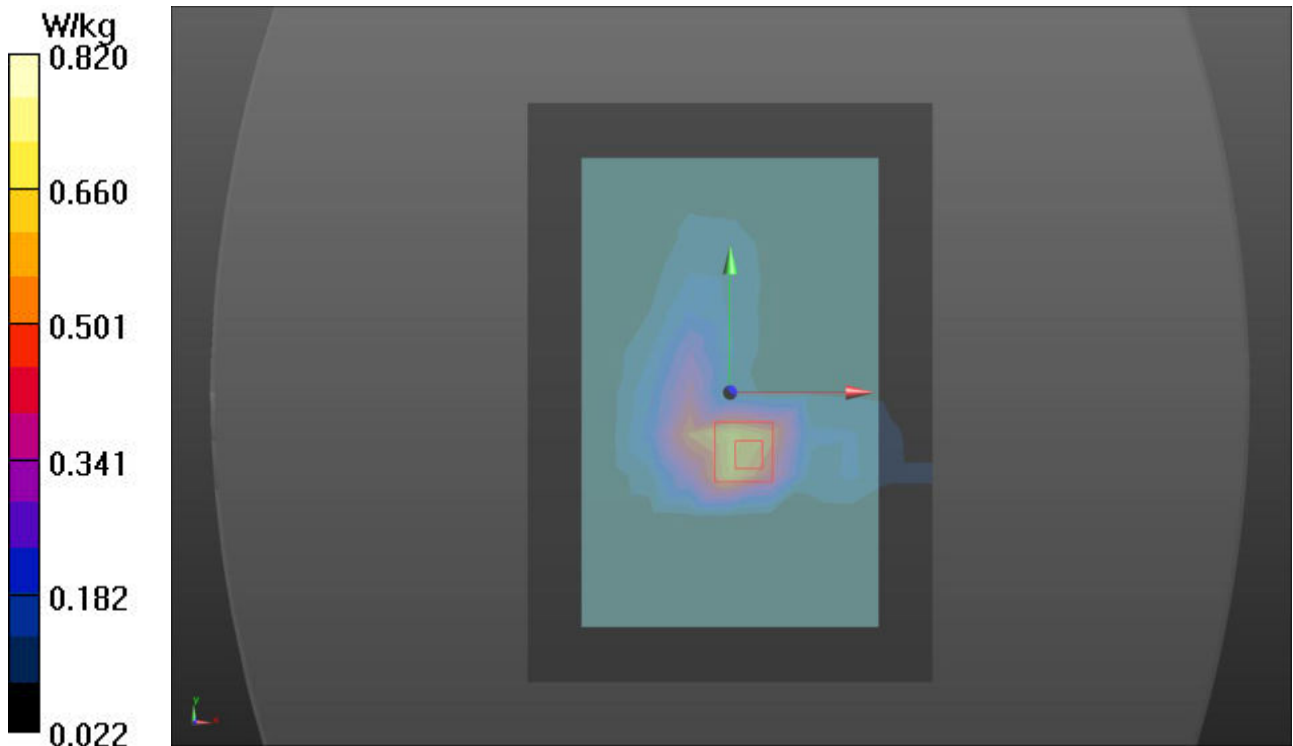

Plot 14 LTE Band 2 50%RB Back Side High (Distance 0mm)

Date: 2026/3/20

Communication System: UID 0, LTE (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.422$ S/m; $\epsilon_r = 38.97$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.94, 7.94, 7.94); Calibrated: 2025/5/28

Electronics: DAE4 Sn1317; Calibrated: 2025/11/19

Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1058

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

LTE B2 50%RB Back Side 0mm/High/Area Scan (11x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.75 W/kg

LTE B2 50%RB Back Side 0mm/High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.16 V/m; Power Drift = 0.031 dB


Peak SAR (extrapolated) = 2.19 W/kg

SAR(1 g) = 0.738 W/kg; SAR(10 g) = 0.346 W/kg

Smallest distance from peaks to all points 3 dB below = 12.1 mm

Ratio of SAR at M2 to SAR at M1 = 57.6%

Maximum value of SAR (measured) = 0.928 W/kg

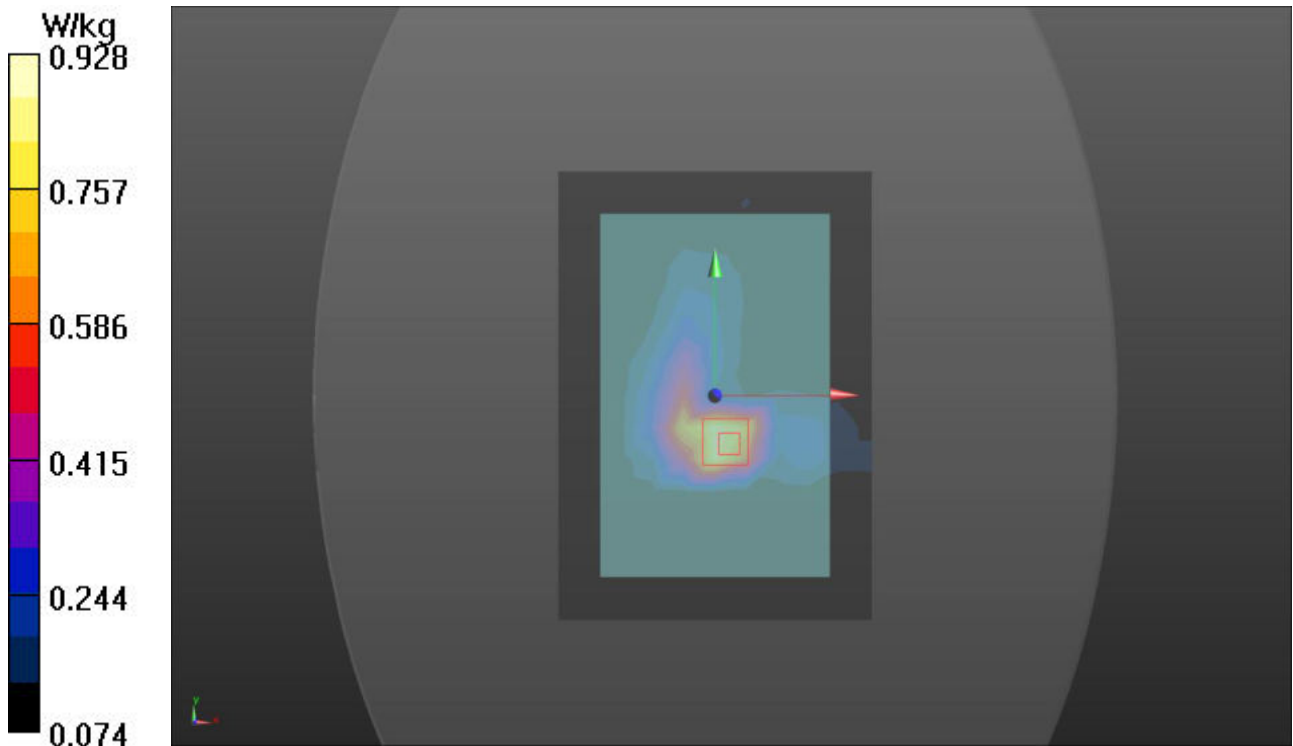

Plot 15 LTE Band 7 50%RB Back Side Middle (Distance 0mm)

Date: 2026/3/22

Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.914$ S/m; $\epsilon_r = 41.705$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.38, 7.38, 7.38); Calibrated: 2025/5/28

Electronics: DAE4 Sn1317; Calibrated: 2025/11/19

Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1058

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

LTE B7 50%RB Back Side 0mm/Mid/Area Scan (11x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.864 W/kg

LTE B7 50%RB Back Side 0mm/Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.474 V/m; Power Drift = 0.038 dB


Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 0.798 W/kg; SAR(10 g) = 0.338 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 48.3%

Maximum value of SAR (measured) = 0.904 W/kg

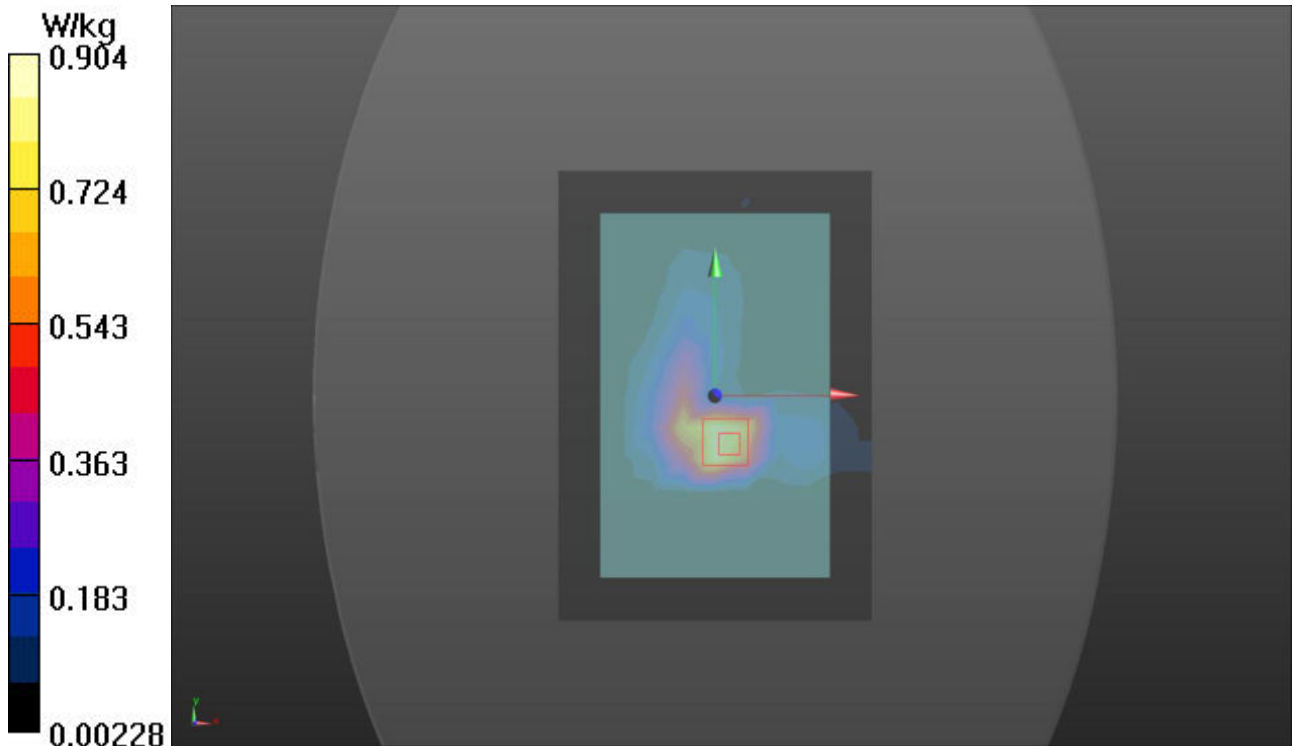

Plot 16 LTE Band 12 50%RB Back Side High (Distance 0mm)

Date: 2026/3/17

Communication System: UID 0, LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711$ MHz; $\sigma = 0.861$ S/m; $\epsilon_r = 42.094$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.80, 9.80, 9.80); Calibrated: 2025/5/28

Electronics: DAE4 Sn1317; Calibrated: 2025/11/19

Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1058

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

LTE B12 50%RB Back Side 0mm/High/Area Scan (11x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.790 W/kg

LTE B12 50%RB Back Side 0mm/High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.46 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 g) = 0.709 W/kg; SAR(10 g) = 0.369 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 47.2%

Maximum value of SAR (measured) = 0.928 W/kg

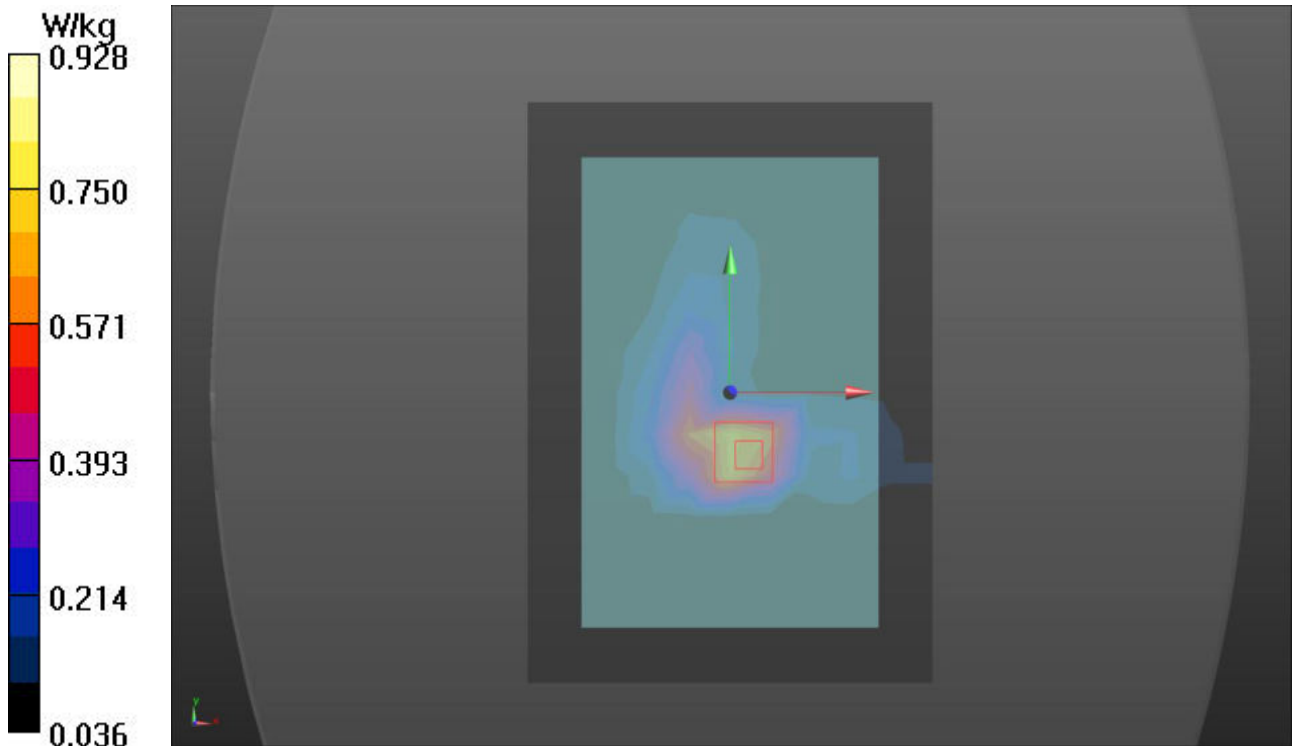

Plot 17 LTE Band 13 50%RB Back Side Middle (Distance 0mm)

Date: 2026/3/17

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.921 \text{ S/m}$; $\epsilon_r = 41.805$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.80, 9.80, 9.80); Calibrated: 2025/5/28

Electronics: DAE4 Sn1317; Calibrated: 2025/11/19

Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1058

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

LTE B13 50%RB Back Side 0mm/Mid/Area Scan (11x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.837 W/kg

LTE B13 50%RB Back Side 0mm/Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.202 V/m ; Power Drift = 0.033 dB


Peak SAR (extrapolated) = 1.888 W/kg

SAR(1 g) = 0.773 W/kg ; SAR(10 g) = 0.408 W/kg

Smallest distance from peaks to all points 3 dB below = 18.2 mm

Ratio of SAR at M2 to SAR at M1 = 47.8%

Maximum value of SAR (measured) = 0.916 W/kg

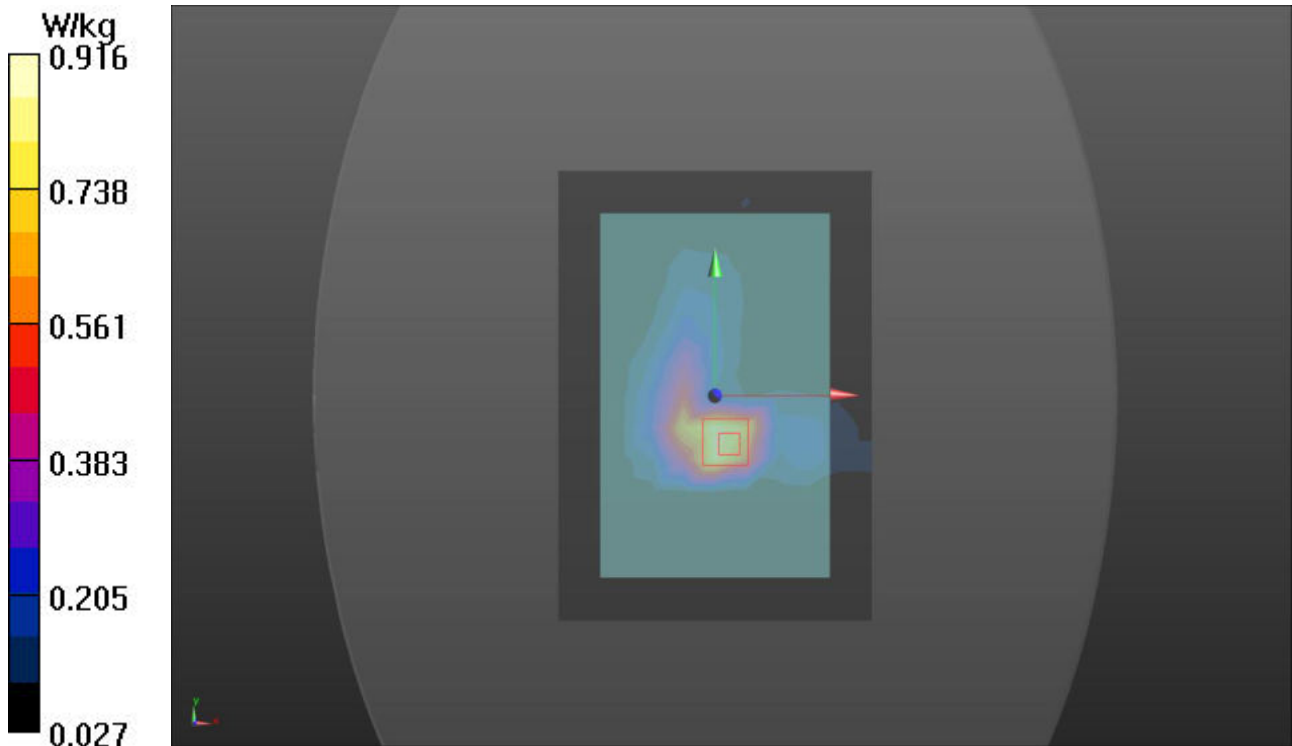

Plot 18 LTE Band 26 50%RB Back Side High (Distance 0mm)

Date: 2026/3/18

Communication System: UID 0, LTE (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.947$ S/m; $\epsilon_r = 41.236$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(9.42, 9.42, 9.42); Calibrated: 2025/5/28

Electronics: DAE4 Sn1317; Calibrated: 2025/11/19

Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1058

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

LTE B26 50%RB Back Side 0mm/High/Area Scan (11x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.865 W/kg

LTE B26 50%RB Back Side 0mm/High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.86 V/m; Power Drift = 0.019 dB


Peak SAR (extrapolated) = 1.830 W/kg

SAR(1 g) = 0.764 W/kg; SAR(10 g) = 0.395 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 57.2%

Maximum value of SAR (measured) = 0.985 W/kg

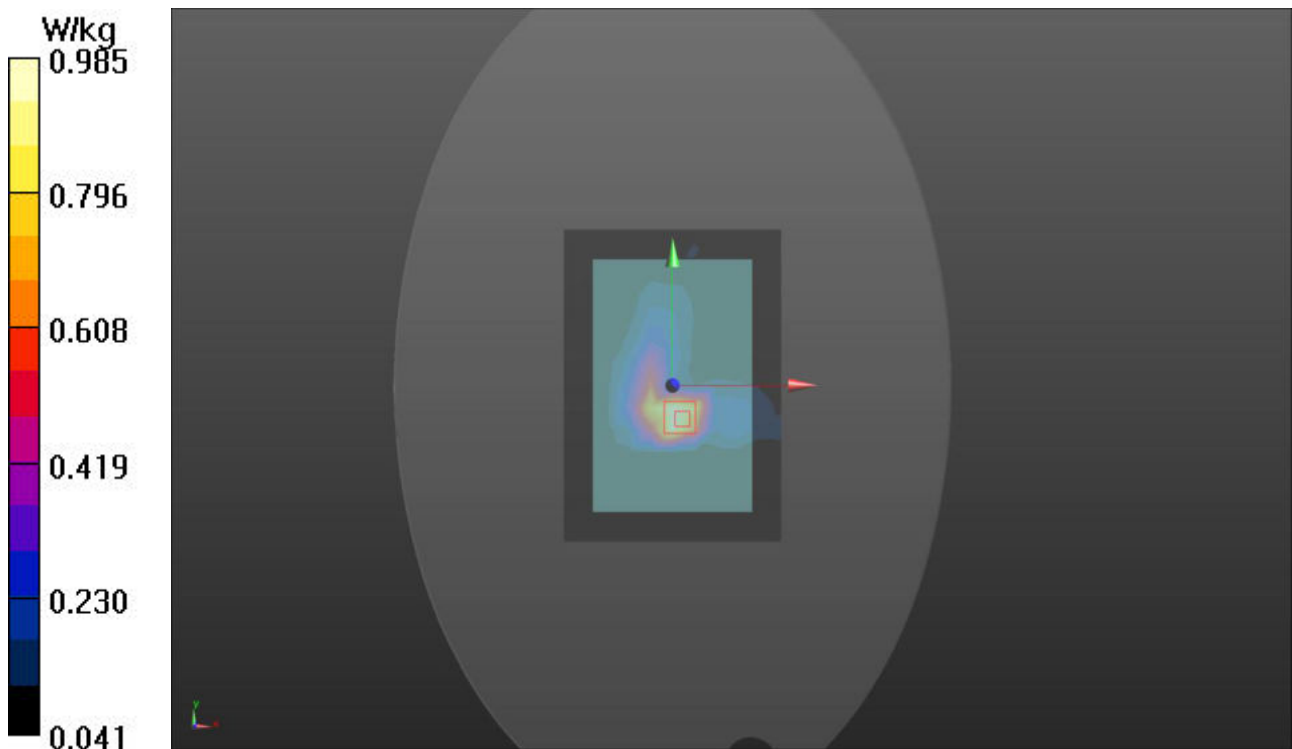

Plot 19 LTE Band 41 1RB Front Side Middle (Distance 0mm)

Date: 2026/3/22

Communication System: UID 0, LTE (0); Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2680$ MHz; $\sigma = 2.104$ S/m; $\epsilon_r = 37.636$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.38, 7.38, 7.38); Calibrated: 2025/5/28

Electronics: DAE4 Sn1317; Calibrated: 2025/11/19

Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1058

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

LTE B41 1RB Back Side 0mm/High/ Area Scan (11x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.528 W/kg

LTE B41 1RB Back Side 0mm/High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.726 V/m; Power Drift = 0.049 dB


Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.515 W/kg; SAR(10 g) = 0.194 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.3%

Maximum value of SAR (measured) = 0.656 W/kg

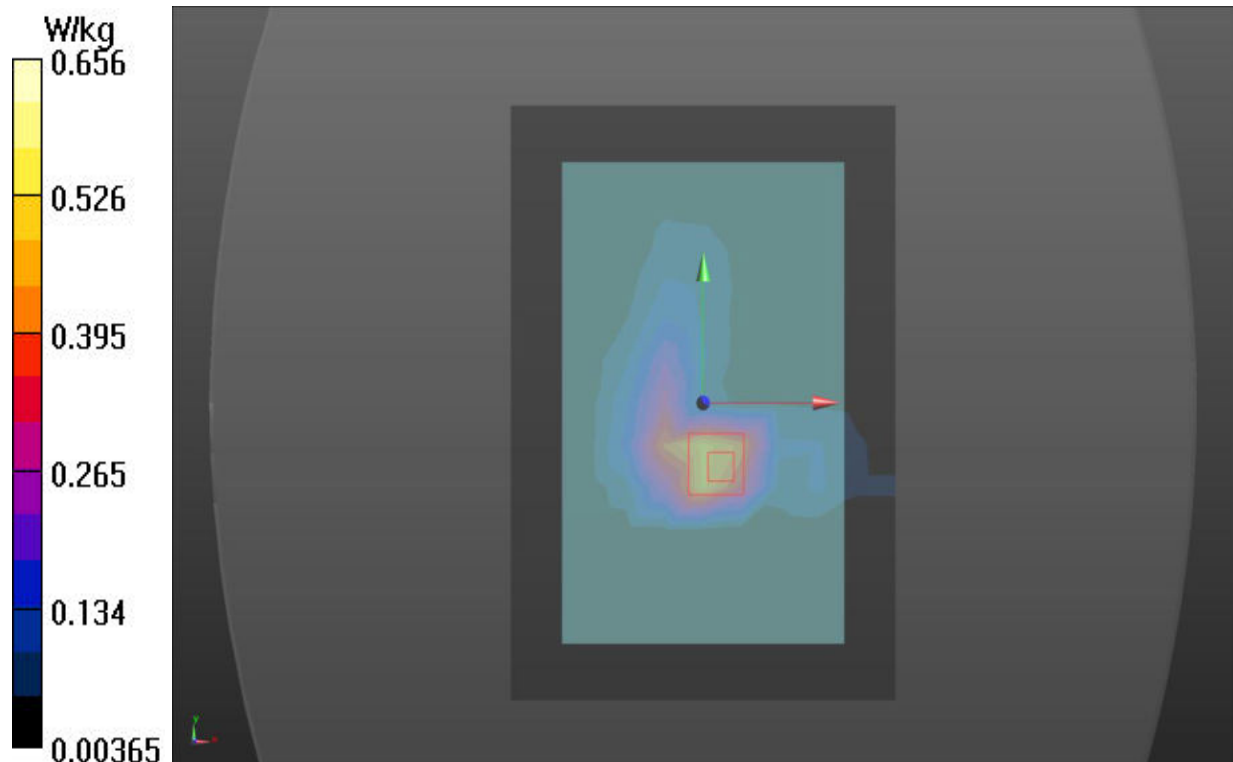

Plot 20 LTE Band 66 50%RB Back Side Middle (Distance 0mm)

Date: 2026/3/19

Communication System: UID 0, LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.329$ S/m; $\epsilon_r = 39.321$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(8.29, 8.29, 8.29); Calibrated: 2025/5/28

Electronics: DAE4 Sn1317; Calibrated: 2025/11/19

Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1058

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

LTE B66 50%RB Back Side 0mm/High/Area Scan (11x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.816 W/kg

LTE B66 50%RB Back Side 0mm/High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.86 V/m; Power Drift = 0.035 dB


Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.665 W/kg; SAR(10 g) = 0.351 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 56.7%

Maximum value of SAR (measured) = 0.916 W/kg

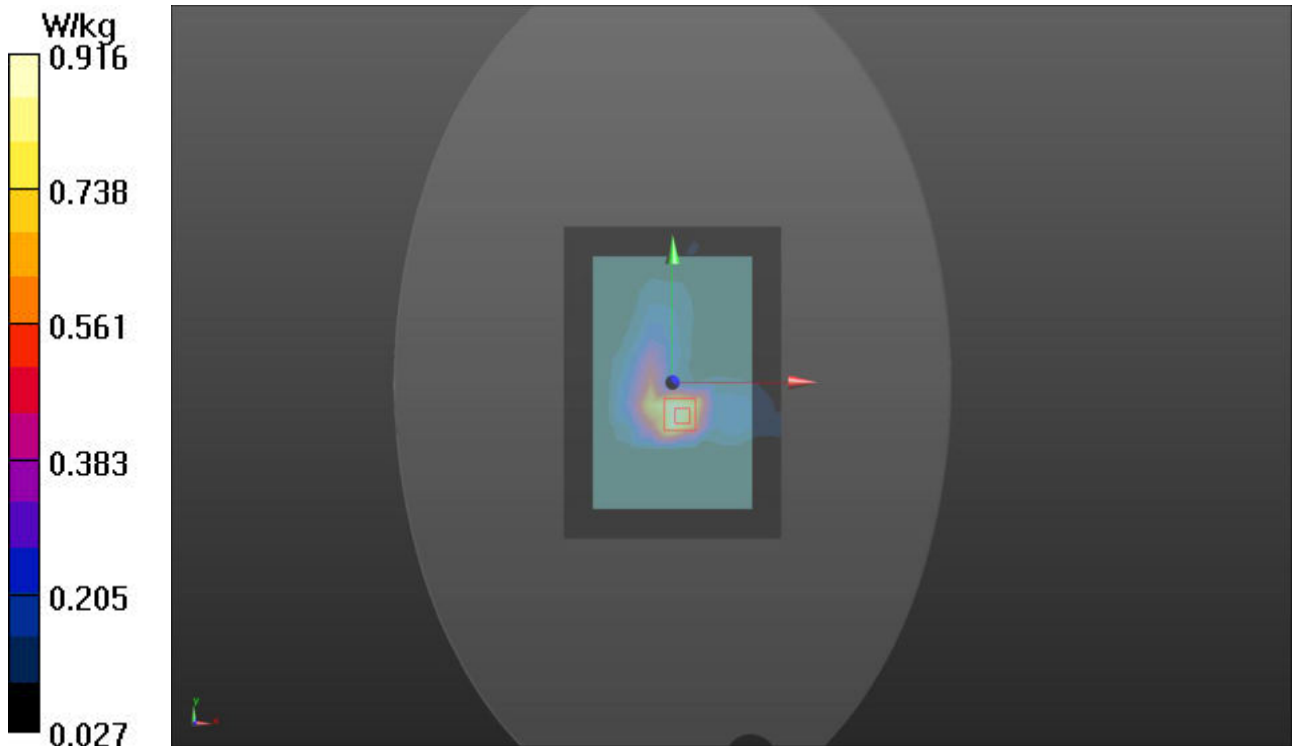

Plot 21 802.11b Back Side Middle (Distance 0mm)

Date: 2026/3/21

Communication System: UID 0, 802.11b (0); Frequency: 2437 MHz;Duty Cycle: 1:1.03

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.824$ S/m; $\epsilon_r = 38.516$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.53, 7.53, 7.53); Calibrated: 2025/5/28

Electronics: DAE4 Sn1317; Calibrated: 2025/11/19

Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1058

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

802.11b Back Side 0mm/Mid/ Area Scan (11x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.476 W/kg

802.11b Back Side 0mm/Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.104 V/m; Power Drift = 0.041dB


Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.392 W/kg; SAR(10 g) = 0.171 W/kg

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 56.1%

Maximum value of SAR (measured) = 0.537 W/kg

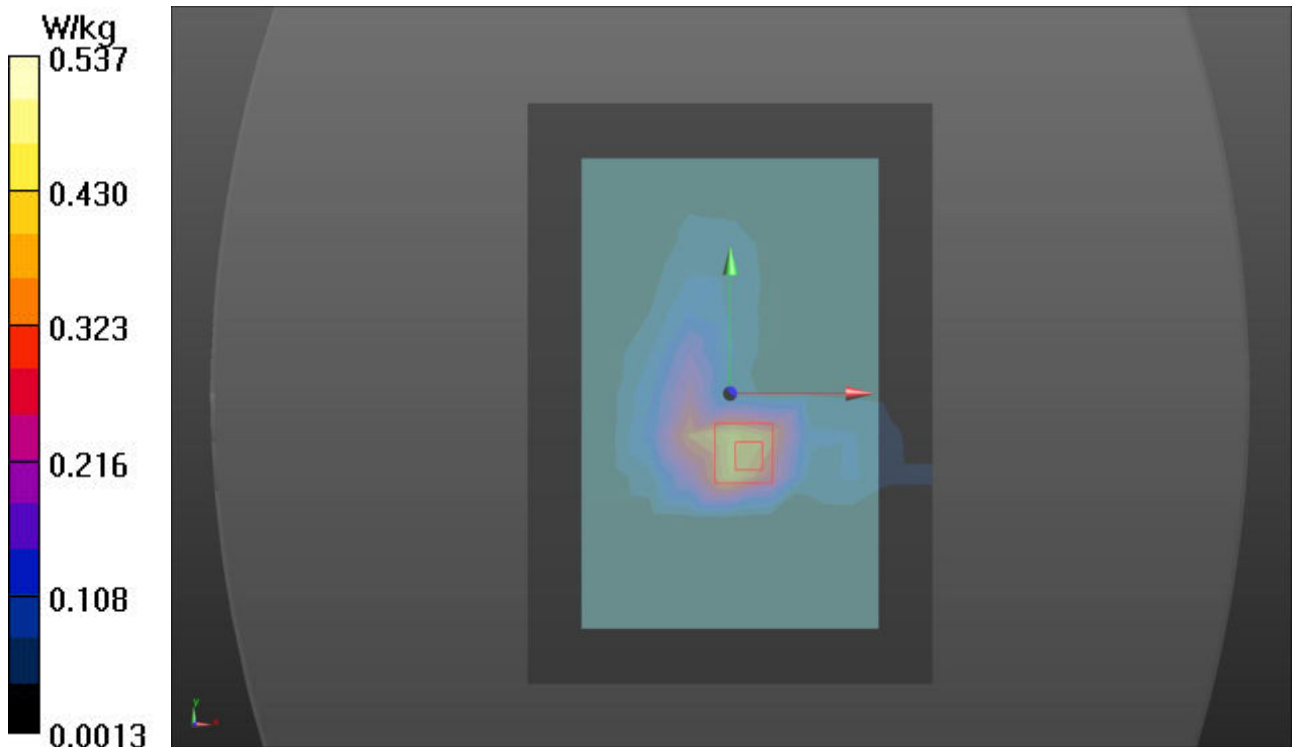

Plot 22 802.11a Back Side Low (Distance 0mm)

Date: 2026/3/23

Communication System: UID 0, 802.11a (0); Frequency: 5500 MHz;Duty Cycle: 1:1.18

Medium parameters used (interpolated): $f = 5500$ MHz; $\sigma = 5.336$ S/m; $\epsilon_r = 34.222$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(4.90, 4.90, 4.90); Calibrated: 2025/5/28

Electronics: DAE4 Sn1317; Calibrated: 2025/11/19

Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1058

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

802.11a Back Side 0mm/Low/ Area Scan (11x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.428 W/kg

802.11a Back Side 0mm/Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.431 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.391 W/kg; SAR(10 g) = 0.093 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 65.3%

Maximum value of SAR (measured) = 0.523 W/kg

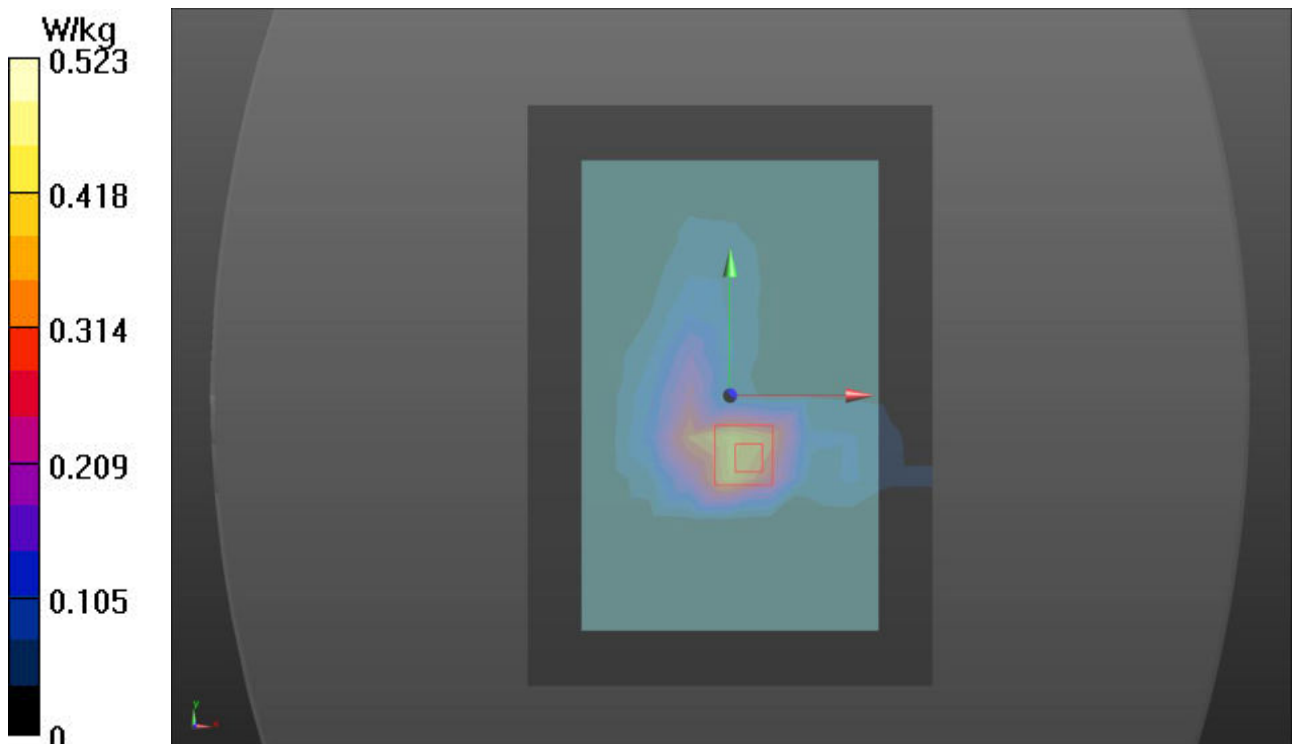

Plot 23 Bluetooth DH5 Back Side Middle (Distance 0mm)

Date: 2026/3/21

Communication System: UID 0, BT (0); Frequency: 2441 MHz; Duty Cycle: 1:1.32

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.828$ S/m; $\epsilon_r = 38.503$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Probe: EX3DV4 - SN3677; ConvF(7.53, 7.53, 7.53); Calibrated: 2025/5/28

Electronics: DAE4 Sn1317; Calibrated: 2025/11/19

Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1058

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

BT DH5 Back Side 0mm/Mid/ Area Scan (11x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.072 W/kg

BT DH5 Back Side 0mm/Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.630 V/m; Power Drift = 0.060 dB


Peak SAR (extrapolated) = 0.184 W/kg

SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.031 W/kg


Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.8%

Maximum value of SAR (measured) = 0.087 W/kg

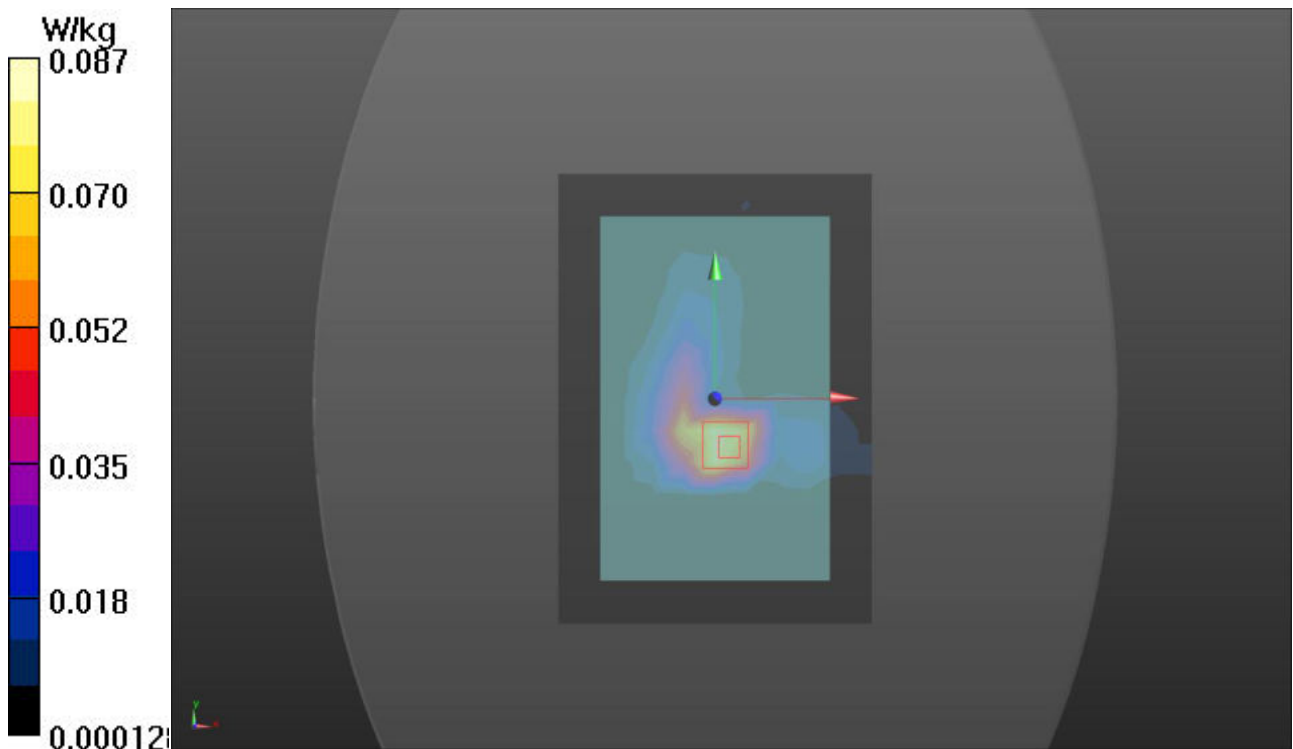

ANNEX D: Probe Calibration Certificate

 In Collaboration with TTL s p e a g CALIBRATION LABORATORY Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2117 E-mail: cmf@caict.ac.cn http://www.caict.ac.cn		 中国认可 国际互认 校准 CALIBRATION CNAS L0570	
Client: TA Shanghai		Certificate No: 25J02Z000300	
CALIBRATION CERTIFICATE			
Object	EX3DV4 - SN : 3677		
Calibration Procedure(s)	FF-Z11-004-02 Calibration Procedures for Dosimetric E-field Probes		
Calibration date:	May 28, 2025		
This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%. Calibration Equipment used (M&TE critical for calibration)			
Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	18-Oct-24(CTTL, No.24J02X101459)	Oct-25
Power sensor NRP8S	104291	18-Oct-24(CTTL, No.24J02X101459)	Oct-25
Power sensor NRP8S	104292	18-Oct-24(CTTL, No.24J02X101459)	Oct-25
Reference 10dBAttenuator	18N50W-10dB	22-Jan-25(CTTL, No.25J02X000465)	Jan-27
Reference 20dBAttenuator	18N50W-20dB	22-Jan-25(CTTL, No.25J02X000466)	Jan-27
Reference Probe EX3DV4	SN 7464	28-Jan-25(SPEAG, No EX-7464_Jan25)	Jan-26
DAE4	SN 1555	16-Aug-24(SPEAG, No DAE4-1555_Aug24)	Aug-25
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
SignalGenerator MG3700A	6201052605	12-Jun-24(CTTL, No.24J02X005419)	Jun-25
SignalGenerator APSIN26G	181-33A6D0700-1959	27-Mar-25(CTTL, No.25J02X001962)	Mar-26
Network Analyzer E5071C	MY46110673	18-Dec-24(CTTL, No.24J02X103932)	Dec-25
Reference 10dBAttenuator	BT0520	15-May-25(CTTL, No.25J02X003069)	May-27
Reference 20dBAttenuator	BT0267	15-May-25(CTTL, No.25J02X003070)	May-27
OCF DAKS	SN 0015	09-Oct-24(SPEAG, No. OCF-DAKS-0015_Oct24)	Oct-25
Calibrated by:	Name: Yu Zongying	Function: SAR Test Engineer	Signature: 
Reviewed by:	Name: Lin Jun	Function: SAR Test Engineer	Signature: 
Approved by:	Name: Qi Dianyuan	Function: SAR Project Leader	Signature: 
Issued: June 03, 2025			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

Certificate No: 25J02Z000300

Page 1 of 22



In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HunYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A,B,C,D	modulation dependent linearization parameters
Polarization Φ	Φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i $\theta=0$ is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}:** Assessed for E-field polarization $\theta=0$ ($f \leq 900\text{MHz}$ in TEM-cell; $f > 1800\text{MHz}$: waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR:** PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}:** A,B,C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800\text{MHz}$) and inside waveguide using analytical field distributions based on power measurements for $f > 800\text{MHz}$. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from $\pm 50\text{MHz}$ to $\pm 100\text{MHz}$.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle:** The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Certificate No:25J02Z000300

Page 2 of 22



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn

DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3677

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.41	0.46	0.40	±10.0%
DCP(mV) ^B	100.5	101.4	101.9	

Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB/μV	C	D dB	VR mV	Max Dev.	Max Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	157.2	±1.9%	±4.7%
		Y	0.0	0.0	1.0		170.1		
		Z	0.0	0.0	1.0		155.6		
10352-AAA	Pulse Waveform (200Hz, 10%)	X	1.86	62.59	7.40	10.00	60	±1.6%	±9.6%
		Y	1.84	61.87	7.12		60		
		Z	1.90	62.85	7.57		60		
10353-AAA	Pulse Waveform (200Hz, 20%)	X	0.89	60.00	5.22	6.99	80	±2.0%	±9.6%
		Y	1.13	60.55	5.61		80		
		Z	0.83	60.00	5.19		80		
10354-AAA	Pulse Waveform (200Hz, 40%)	X	0.54	60.00	4.06	3.98	95	±2.4%	±9.6%
		Y	0.63	60.00	4.42		95		
		Z	0.49	60.00	3.88		95		
10355-AAA	Pulse Waveform (200Hz, 60%)	X	0.03	60.00	100.00	2.22	120	±2.4%	±9.6%
		Y	0.02	60.00	100.00		120		
		Z	0.08	159.65	6.04		120		
10387-AAA	QPSK Waveform, 1 MHz	X	20.00	115.82	33.49	1.00	150	±2.2%	±9.6%
		Y	8.55	99.06	28.30		150		
		Z	20.00	117.99	34.39		150		
10388-AAA	QPSK Waveform, 10 MHz	X	11.89	102.22	29.87	0.00	150	±1.9%	±9.6%
		Y	6.26	89.43	25.37		150		
		Z	20.00	113.28	33.48		150		
10396-AAA	64-QAM Waveform, 100 kHz	X	5.32	89.34	29.39	3.01	150	±1.1%	±9.6%
		Y	4.01	81.45	25.57		150		
		Z	5.17	89.84	29.68		150		
10414-AAA	WLAN CCDF, 64-QAM, 40MHz	X	5.06	67.91	17.36	0.00	150	±1.4%	±9.6%
		Y	5.00	67.49	16.99		150		
		Z	5.07	68.37	17.66		150		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X, Y, Z do not affect the E^2 -field uncertainty inside TSL (see Page 5).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3677

Sensor Model Parameters

	C1 fF	C2 fF	α V^{-1}	T1 ms. V^{-2}	T2 ms. V^{-1}	T3 ms	T4 V^{-2}	T5 V^{-1}	T6
X	39.00	291.53	36.45	10.57	0.00	5.05	0.00	0.34	1.02
Y	38.84	288.35	35.87	13.70	0.00	5.01	0.00	0.36	1.02
Z	34.20	252.43	35.76	8.03	0.00	5.04	0.12	0.26	1.02

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	118.8
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disable
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	9mm
Tip Diameter	2.5mm
Probe Tip to Sensor X Calibration Point	1mm
Probe Tip to Sensor Y Calibration Point	1mm
Probe Tip to Sensor Z Calibration Point	1mm
Recommended Measurement Distance from Surface	1.4mm



In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: cmf@caict.ac.cn

http://www.caict.ac.cn

DASY/EASY – Parameters of Probe: EX3DV4 – SN:3677

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz] ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	41.9	0.89	9.80	9.80	9.80	0.18	1.14	±13%
835	41.5	0.90	9.42	9.42	9.42	0.13	1.57	±13%
1750	40.1	1.37	8.29	8.29	8.29	0.26	1.00	±13%
1900	40.0	1.40	7.94	7.94	7.94	0.25	1.04	±13%
2000	40.0	1.40	7.91	7.91	7.91	0.26	1.06	±13%
2300	39.5	1.67	7.79	7.79	7.79	0.62	0.67	±13%
2450	39.2	1.80	7.53	7.53	7.53	0.63	0.68	±13%
2600	39.0	1.96	7.38	7.38	7.38	0.64	0.68	±13%
3300	38.2	2.71	7.03	7.03	7.03	0.40	0.95	±14%
3500	37.9	2.91	6.91	6.91	6.91	0.43	1.03	±14%
3700	37.7	3.12	6.75	6.75	6.75	0.40	1.08	±14%
3900	37.5	3.32	6.65	6.65	6.65	0.35	1.35	±14%
4100	37.2	3.53	6.63	6.63	6.63	0.35	1.25	±14%
4400	36.9	3.84	6.42	6.42	6.42	0.30	1.52	±14%
4600	36.7	4.04	6.32	6.32	6.32	0.45	1.22	±14%
4800	36.4	4.25	6.22	6.22	6.22	0.50	1.20	±14%
4950	36.3	4.40	6.02	6.02	6.02	0.50	1.20	±14%
5250	35.9	4.71	5.50	5.50	5.50	0.50	1.30	±14%
5600	35.5	5.07	4.90	4.90	4.90	0.55	1.20	±14%
5750	35.4	5.22	5.01	5.01	5.01	0.55	1.22	±14%

^C Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequency up to 6 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.




In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HunYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

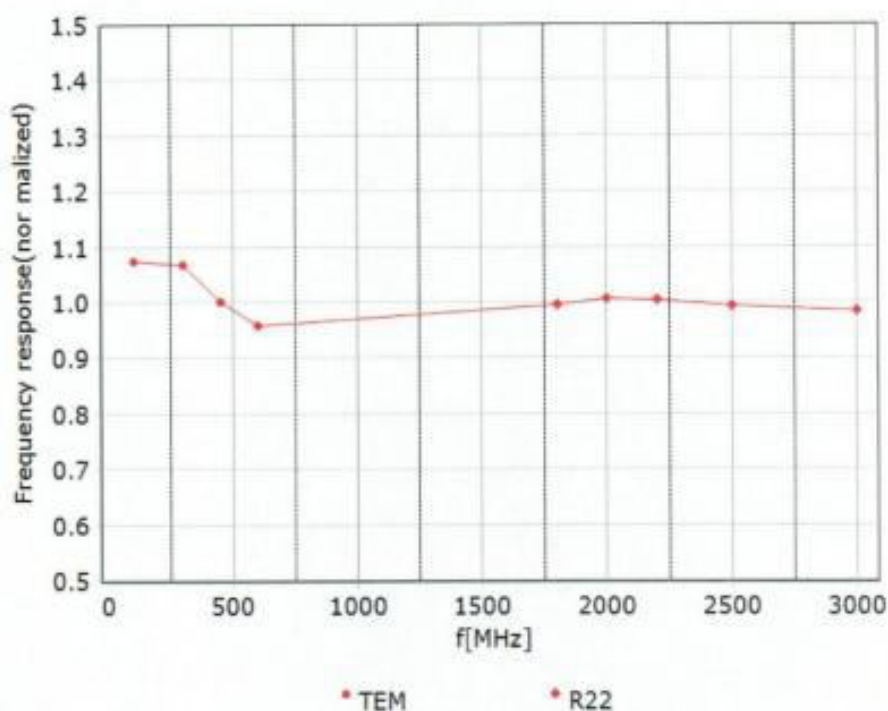

Uncertainty of Frequency Response of E-field: $\pm 7.4\%$ ($k=2$)






Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emfi@caict.ac.cn http://www.caict.ac.cn



Receiving Pattern (Φ), $\theta=0^\circ$

f=600 MHz, TEM

f=1800 MHz, R22

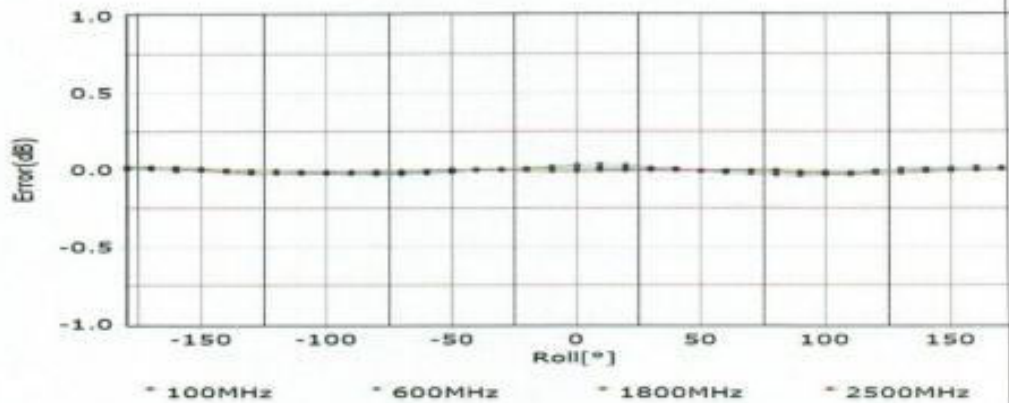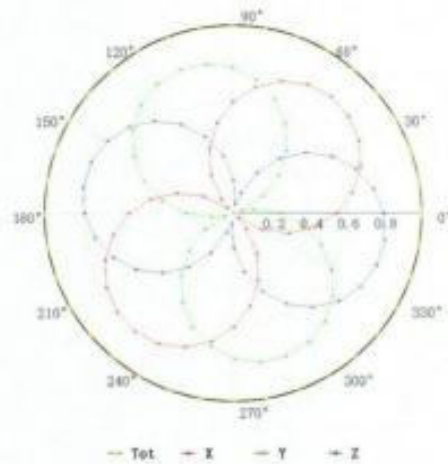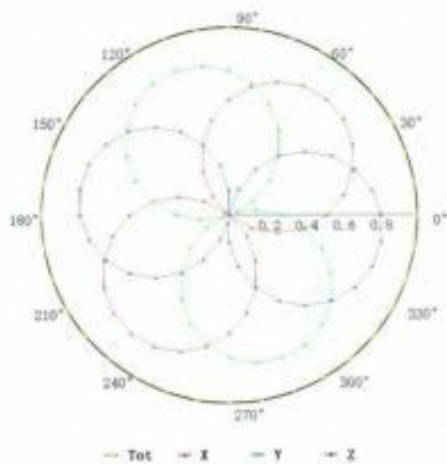

Uncertainty of Axial Isotropy Assessment: $\pm 1.2\%$ ($k=2$)

Certificate No:25J02Z000300

Page 7 of 22





In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

Dynamic Range f(SAR_{head}) (TEM cell, f = 900 MHz)

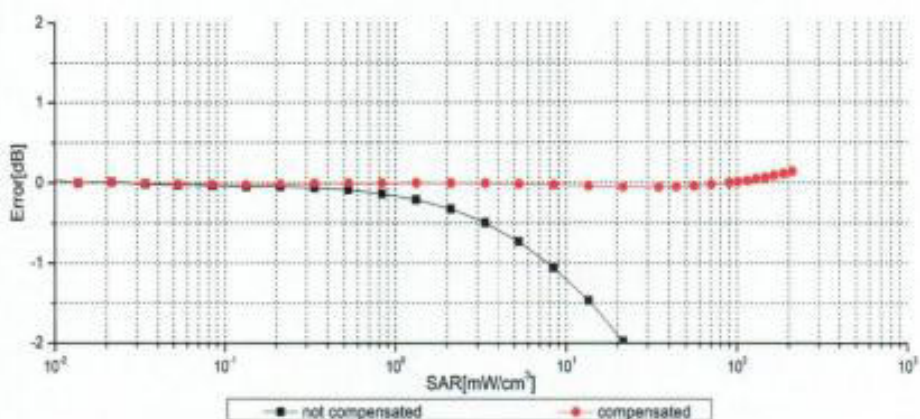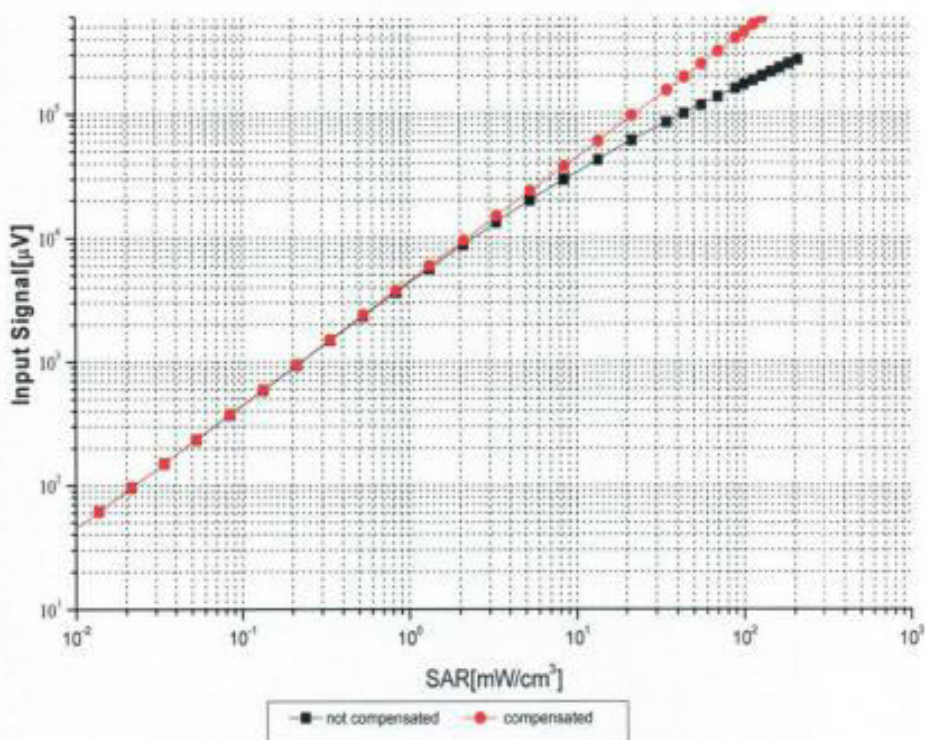

Uncertainty of Linearity Assessment: ±0.9% (k=2)

Certificate No:25J02Z000300

Page 8 of 22



In Collaboration with
s p e a g
CALIBRATION LABORATORY





Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>


Conversion Factor Assessment

$f=750\text{ MHz}$, WGLS R9(H_convF)

$f=1750\text{ MHz}$, WGLS R22(H_convF)

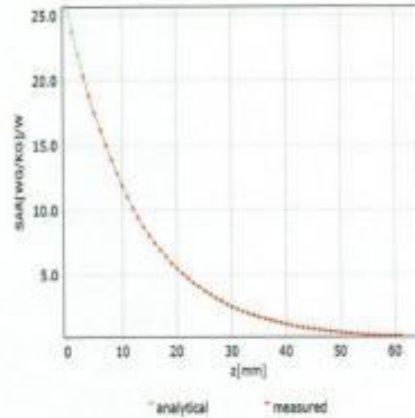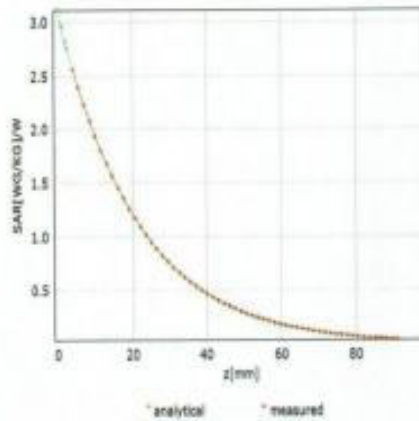

Deviation from Isotropy in Liquid

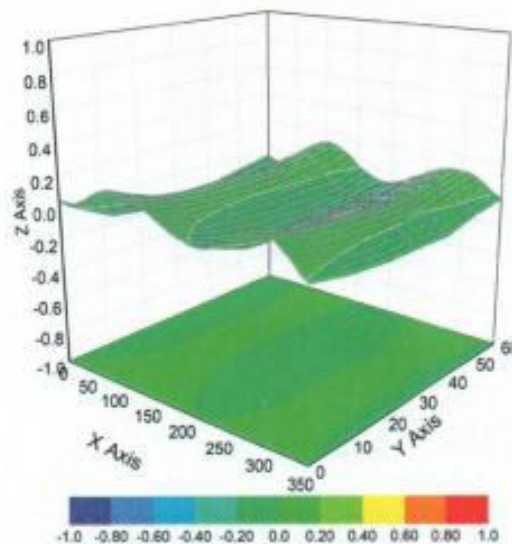

Uncertainty of Spherical Isotropy Assessment: $\pm 3.2\%$ ($k=2$)

Certificate No:25J02Z000300

Page 9 of 22



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn



Appendix: Modulation Calibration Parameters

UID	Rev	Communication System Name	Group	PAR (dB)	UncE (k=2)
0		CW	CW	0.00	± 4.7 %
10010	CAA	SAR Validation (Square, 100ms, 10ms)	Test	10.00	± 9.6 %
10011	CAB	UMTS-FDD (WCDMA)	WCDMA	2.91	± 9.6 %
10012	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	WLAN	1.87	± 9.6 %
10013	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	WLAN	9.46	± 9.6 %
10021	DAC	GSM-FDD (TDMA, GMSK)	GSM	9.39	± 9.6 %
10023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	9.57	± 9.6 %
10024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	6.56	± 9.6 %
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	GSM	12.62	± 9.6 %
10026	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	± 9.6 %
10027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	4.80	± 9.6 %
10028	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	GSM	3.55	± 9.6 %
10029	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	GSM	7.78	± 9.6 %
10030	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Bluetooth	5.30	± 9.6 %
10031	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	Bluetooth	1.87	± 9.6 %
10032	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Bluetooth	1.16	± 9.6 %
10033	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	Bluetooth	7.74	± 9.6 %
10034	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	Bluetooth	4.53	± 9.6 %
10035	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	Bluetooth	3.83	± 9.6 %
10036	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	Bluetooth	8.01	± 9.6 %
10037	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	Bluetooth	4.77	± 9.6 %
10038	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	Bluetooth	4.10	± 9.6 %
10039	CAB	CDMA2000 (1xRTT, RC1)	CDMA2000	4.57	± 9.6 %
10042	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	AMPS	7.78	± 9.6 %
10044	CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	AMPS	0.00	± 9.6 %
10046	CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	DECT	13.80	± 9.6 %
10049	CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	DECT	10.79	± 9.6 %
10056	CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	TD-SCDMA	11.01	± 9.6 %
10058	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	GSM	6.52	± 9.6 %
10059	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	WLAN	2.12	± 9.6 %
10060	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	WLAN	2.83	± 9.6 %
10061	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	WLAN	3.60	± 9.6 %
10062	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	WLAN	8.68	± 9.6 %
10063	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	WLAN	8.63	± 9.6 %
10064	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	WLAN	9.09	± 9.6 %
10065	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	WLAN	9.00	± 9.6 %
10066	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	WLAN	9.38	± 9.6 %
10067	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	WLAN	10.12	± 9.6 %
10068	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	WLAN	10.24	± 9.6 %
10069	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	WLAN	10.56	± 9.6 %
10071	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	WLAN	9.83	± 9.6 %
10072	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.82	± 9.6 %
10073	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	WLAN	9.94	± 9.6 %
10074	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	WLAN	10.30	± 9.6 %
10075	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	WLAN	10.77	± 9.6 %
10076	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	WLAN	10.94	± 9.6 %
10077	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	WLAN	11.00	± 9.6 %
10081	CAB	CDMA2000 (1xRTT, RC3)	CDMA2000	3.97	± 9.6 %
10082	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	AMPS	4.77	± 9.6 %
10090	DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	GSM	6.56	± 9.6 %
10097	CAC	UMTS-FDD (HSDPA)	WCDMA	3.98	± 9.6 %
10098	DAC	UMTS-FDD (HSUPA, Subtest 2)	WCDMA	3.98	± 9.6 %
10099	CAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	GSM	9.55	± 9.6 %
10100	CAC	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-FDD	5.67	± 9.6 %
10101	CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	± 9.6 %

Certificate No:25J02Z000300

Page 10 of 22



In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn

10102	CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	± 9.6 %
10103	DAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TDD	9.29	± 9.6 %
10104	CAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-TDD	9.97	± 9.6 %
10105	CAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TDD	10.01	± 9.6 %
10108	CAE	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-FDD	5.80	± 9.6 %
10109	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6 %
10110	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-FDD	5.75	± 9.6 %
10111	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-FDD	6.44	± 9.6 %
10112	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-FDD	6.59	± 9.6 %
10113	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-FDD	6.62	± 9.6 %
10114	CAG	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	WLAN	8.10	± 9.6 %
10115	CAG	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	WLAN	8.46	± 9.6 %
10116	CAG	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	WLAN	8.15	± 9.6 %
10117	CAG	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	WLAN	8.07	± 9.6 %
10118	CAD	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	WLAN	8.59	± 9.6 %
10119	CAD	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	WLAN	8.13	± 9.6 %
10140	CAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-FDD	6.49	± 9.6 %
10141	CAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	6.53	± 9.6 %
10142	CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10143	CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-FDD	6.35	± 9.6 %
10144	CAC	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-FDD	6.65	± 9.6 %
10145	CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-FDD	5.76	± 9.6 %
10146	CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.41	± 9.6 %
10147	CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.72	± 9.6 %
10149	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	± 9.6 %
10150	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	± 9.6 %
10151	CAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	9.28	± 9.6 %
10152	CAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-TDD	9.92	± 9.6 %
10153	CAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-TDD	10.05	± 9.6 %
10154	CAF	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-FDD	5.75	± 9.6 %
10155	CAF	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6 %
10156	CAF	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-FDD	5.79	± 9.6 %
10157	CAE	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-FDD	6.49	± 9.6 %
10158	CAE	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-FDD	6.62	± 9.6 %
10159	CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-FDD	6.56	± 9.6 %
10160	CAG	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-FDD	5.82	± 9.6 %
10161	CAG	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6 %
10162	CAG	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-FDD	6.58	± 9.6 %
10166	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-FDD	5.46	± 9.6 %
10167	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.21	± 9.6 %
10168	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.79	± 9.6 %
10169	CAG	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10170	CAG	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10171	CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-FDD	6.49	± 9.6 %
10172	CAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10173	CAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10174	CAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10175	CAF	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-FDD	5.72	± 9.6 %
10176	CAF	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10177	CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10178	CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10179	AAE	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10180	CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10181	CAG	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-FDD	5.72	± 9.6 %
10182	CAG	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10183	CAG	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10184	CAG	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10185	CAI	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-FDD	6.51	± 9.6 %
10186	CAG	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %

Certificate No:25J02Z000300

Page 11 of 22



In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

10187	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10188	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10189	CAE	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10193	CAE	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	WLAN	8.09	± 9.6 %
10194	AAD	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	WLAN	8.12	± 9.6 %
10195	CAE	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	WLAN	8.21	± 9.6 %
10196	CAE	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	WLAN	8.10	± 9.6 %
10197	AAE	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	WLAN	8.13	± 9.6 %
10198	CAF	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	WLAN	8.27	± 9.6 %
10219	CAF	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	WLAN	8.03	± 9.6 %
10220	AAF	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	WLAN	8.13	± 9.6 %
10221	CAC	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	WLAN	8.27	± 9.6 %
10222	CAC	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	WLAN	8.06	± 9.6 %
10223	CAD	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	WLAN	8.48	± 9.6 %
10224	CAD	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	WLAN	8.08	± 9.6 %
10225	CAD	UMTS-FDD (HSPA+)	WCDMA	5.97	± 9.6 %
10226	CAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.49	± 9.6 %
10227	CAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.26	± 9.6 %
10228	CAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-TDD	9.22	± 9.6 %
10229	DAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10230	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10231	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-TDD	9.19	± 9.6 %
10232	CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10233	CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10234	CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10235	CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10236	CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10237	CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10238	CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10239	CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10240	CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10241	CAB	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.82	± 9.6 %
10242	CAD	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-TDD	9.86	± 9.6 %
10243	CAD	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-TDD	9.46	± 9.6 %
10244	CAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-TDD	10.06	± 9.6 %
10245	CAG	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-TDD	10.06	± 9.6 %
10246	CAG	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TDD	9.30	± 9.6 %
10247	CAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-TDD	9.91	± 9.6 %
10248	CAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-TDD	10.09	± 9.6 %
10249	CAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-TDD	9.29	± 9.6 %
10250	CAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-TDD	9.81	± 9.6 %
10251	CAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-TDD	10.17	± 9.6 %
10252	CAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-TDD	9.24	± 9.6 %
10253	CAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-TDD	9.90	± 9.6 %
10254	CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-TDD	10.14	± 9.6 %
10255	CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-TDD	9.20	± 9.6 %
10256	CAB	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.96	± 9.6 %
10257	CAD	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.08	± 9.6 %
10258	CAD	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-TDD	9.34	± 9.6 %
10259	CAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-TDD	9.98	± 9.6 %
10260	CAG	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-TDD	9.97	± 9.6 %
10261	CAG	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-TDD	9.24	± 9.6 %
10262	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-TDD	9.83	± 9.6 %
10263	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-TDD	10.16	± 9.6 %
10264	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-TDD	9.23	± 9.6 %
10265	CAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-TDD	9.92	± 9.6 %
10266	CAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-TDD	10.07	± 9.6 %
10267	CAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-TDD	9.30	± 9.6 %
10268	CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-TDD	10.06	± 9.6 %

Certificate No:25J02Z000300

Page 12 of 22



In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HunYuanBei Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2117

E-mail: cmf@caict.ac.cn

http://www.caict.ac.cn

10269	CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-TDD	10.13	± 9.6 %
10270	CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-TDD	9.58	± 9.6 %
10274	CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	WCDMA	4.87	± 9.6 %
10275	CAD	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	WCDMA	3.96	± 9.6 %
10277	CAD	PHS (QPSK)	PHS	11.81	± 9.6 %
10278	CAD	PHS (QPSK, BW 884MHz, Rolloff 0.5)	PHS	11.81	± 9.6 %
10279	CAG	PHS (QPSK, BW 884MHz, Rolloff 0.38)	PHS	12.18	± 9.6 %
10290	CAG	CDMA2000, RC1, SO55, Full Rate	CDMA2000	3.91	± 9.6 %
10291	CAG	CDMA2000, RC3, SO55, Full Rate	CDMA2000	3.46	± 9.6 %
10292	CAG	CDMA2000, RC3, SO32, Full Rate	CDMA2000	3.39	± 9.6 %
10293	CAG	CDMA2000, RC3, SO3, Full Rate	CDMA2000	3.50	± 9.6 %
10295	CAG	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	CDMA2000	12.49	± 9.6 %
10297	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-FDD	5.81	± 9.6 %
10298	CAF	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-FDD	5.72	± 9.6 %
10299	CAF	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-FDD	6.39	± 9.6 %
10300	CAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-FDD	6.80	± 9.6 %
10301	CAC	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)	WiMAX	12.03	± 9.6 %
10302	CAB	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3CTRL)	WiMAX	12.57	± 9.6 %
10303	CAB	IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, QPSK, PUSC)	WiMAX	12.52	± 9.6 %
10304	CAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)	WiMAX	11.86	± 9.6 %
10305	CAA	IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC)	WiMAX	15.24	± 9.6 %
10306	CAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC)	WiMAX	14.67	± 9.6 %
10307	AAB	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC)	WiMAX	14.49	± 9.6 %
10308	AAB	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	WiMAX	14.46	± 9.6 %
10309	AAB	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3)	WiMAX	14.58	± 9.6 %
10310	AAB	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3)	WiMAX	14.57	± 9.6 %
10311	AAB	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-FDD	6.06	± 9.6 %
10313	AAD	iDEN 1:3	iDEN	10.51	± 9.6 %
10314	AAD	iDEN 1:6	iDEN	13.48	± 9.6 %
10315	AAD	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc dc)	WLAN	1.71	± 9.6 %
10316	AAD	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc dc)	WLAN	8.36	± 9.6 %
10317	AAA	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc dc)	WLAN	8.36	± 9.6 %
10352	AAA	Pulse Waveform (200Hz, 10%)	Generic	10.00	± 9.6 %
10353	AAA	Pulse Waveform (200Hz, 20%)	Generic	6.99	± 9.6 %
10354	AAA	Pulse Waveform (200Hz, 40%)	Generic	3.98	± 9.6 %
10355	AAA	Pulse Waveform (200Hz, 60%)	Generic	2.22	± 9.6 %
10356	AAA	Pulse Waveform (200Hz, 80%)	Generic	0.97	± 9.6 %
10387	AAA	QPSK Waveform, 1 MHz	Generic	5.10	± 9.6 %
10388	AAA	QPSK Waveform, 10 MHz	Generic	5.22	± 9.6 %
10396	AAA	64-QAM Waveform, 100 kHz	Generic	6.27	± 9.6 %
10399	AAA	64-QAM Waveform, 40 MHz	Generic	6.27	± 9.6 %
10400	AAD	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc dc)	WLAN	8.37	± 9.6 %
10401	AAA	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc dc)	WLAN	8.60	± 9.6 %
10402	AAA	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc dc)	WLAN	8.53	± 9.6 %
10403	AAB	CDMA2000 (1xEV-DO, Rev. 0)	CDMA2000	3.76	± 9.6 %
10404	AAB	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	3.77	± 9.6 %
10406	AAD	CDMA2000, RC3, SO32, SCH0, Full Rate	CDMA2000	5.22	± 9.6 %
10410	AAA	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Sub=2,3,4,7,8,9)	LTE-TDD	7.82	± 9.6 %
10414	AAA	WLAN CCDF, 64-QAM, 40MHz	Generic	8.54	± 9.6 %
10415	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc dc)	WLAN	1.54	± 9.6 %
10416	AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc dc)	WLAN	8.23	± 9.6 %
10417	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc dc)	WLAN	8.23	± 9.6 %
10418	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc, Long)	WLAN	8.14	± 9.6 %
10419	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc, Short)	WLAN	8.19	± 9.6 %
10422	AAA	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	WLAN	8.32	± 9.6 %
10423	AAA	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	WLAN	8.47	± 9.6 %
10424	AAE	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	WLAN	8.40	± 9.6 %
10425	AAE	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	WLAN	8.41	± 9.6 %
10426	AAE	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	WLAN	8.45	± 9.6 %

Certificate No:25J02Z000300

Page 13 of 22



In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

10427	AAB	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	WLAN	8.41	± 9.6 %
10430	AAB	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	LTE-FDD	8.28	± 9.6 %
10431	AAC	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	LTE-FDD	8.38	± 9.6 %
10432	AAB	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	LTE-FDD	8.34	± 9.6 %
10433	AAC	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	LTE-FDD	8.34	± 9.6 %
10434	AAG	W-CDMA (BS Test Model 1, 64 DPCH)	WCDMA	8.60	± 9.6 %
10435	AAA	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6 %
10447	AAA	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.56	± 9.6 %
10448	AAA	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.53	± 9.6 %
10449	AAC	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.51	± 9.6 %
10450	AAA	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.48	± 9.6 %
10451	AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	WCDMA	7.59	± 9.6 %
10453	AAC	Validation (Square, 10ms, 1ms)	Test	10.00	± 9.6 %
10456	AAC	IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc dc)	WLAN	8.63	± 9.6 %
10457	AAC	UMTS-FDD (DC-HSDPA)	WCDMA	6.62	± 9.6 %
10458	AAC	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	CDMA2000	6.55	± 9.6 %
10459	AAC	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	CDMA2000	8.25	± 9.6 %
10460	AAC	UMTS-FDD (WCDMA, AMR)	WCDMA	2.39	± 9.6 %
10461	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6 %
10462	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.30	± 9.6 %
10463	AAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.56	± 9.6 %
10464	AAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6 %
10465	AAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 9.6 %
10466	AAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	± 9.6 %
10467	AAA	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6 %
10468	AAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 9.6 %
10469	AAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Sub)	LTE-TDD	8.56	± 9.6 %
10470	AAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6 %
10471	AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 9.6 %
10472	AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	± 9.6 %
10473	AAA	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6 %
10474	AAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 9.6 %
10475	AAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	± 9.6 %
10477	AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 9.6 %
10478	AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	± 9.6 %
10479	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 9.6 %
10480	AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.18	± 9.6 %
10481	AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.45	± 9.6 %
10482	AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.71	± 9.6 %
10483	AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Sub)	LTE-TDD	8.39	± 9.6 %
10484	AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.47	± 9.6 %
10485	AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Sub)	LTE-TDD	7.59	± 9.6 %
10486	AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Sub)	LTE-TDD	8.38	± 9.6 %
10487	AAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Sub)	LTE-TDD	8.60	± 9.6 %
10488	AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Sub)	LTE-TDD	7.70	± 9.6 %
10489	AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Sub)	LTE-TDD	8.31	± 9.6 %
10490	AAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Sub)	LTE-TDD	8.54	± 9.6 %
10491	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 9.6 %
10492	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Sub)	LTE-TDD	8.41	± 9.6 %
10493	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Sub)	LTE-TDD	8.55	± 9.6 %
10494	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 9.6 %
10495	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	8.37	± 9.6 %
10496	AAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Sub)	LTE-TDD	8.54	± 9.6 %
10497	AAE	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.67	± 9.6 %
10498	AAE	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.40	± 9.6 %
10499	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.68	± 9.6 %
10500	AAF	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.67	± 9.6 %
10501	AAF	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Sub)	LTE-TDD	8.44	± 9.6 %
10502	AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.52	± 9.6 %

Certificate No:25J02Z000300

Page 14 of 22



In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HuanYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn

10503	AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Sub)	LTE-TDD	7.72	± 9.6 %
10504	AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Sub)	LTE-TDD	8.31	± 9.6 %
10505	AAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Sub)	LTE-TDD	8.54	± 9.6 %
10506	AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 9.6 %
10507	AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Sub)	LTE-TDD	8.36	± 9.6 %
10508	AAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Sub)	LTE-TDD	8.55	± 9.6 %
10509	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	7.99	± 9.6 %
10510	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Sub)	LTE-TDD	8.49	± 9.6 %
10511	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Sub)	LTE-TDD	8.51	± 9.6 %
10512	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 9.6 %
10513	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	8.42	± 9.6 %
10514	AAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Sub)	LTE-TDD	8.45	± 9.6 %
10515	AAE	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc dc)	WLAN	1.58	± 9.6 %
10516	AAE	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc dc)	WLAN	1.57	± 9.6 %
10517	AAF	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc dc)	WLAN	1.58	± 9.6 %
10518	AAF	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc dc)	WLAN	8.23	± 9.6 %
10519	AAF	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc dc)	WLAN	8.39	± 9.6 %
10520	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc dc)	WLAN	8.12	± 9.6 %
10521	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc dc)	WLAN	7.97	± 9.6 %
10522	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc dc)	WLAN	8.45	± 9.6 %
10523	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc dc)	WLAN	8.08	± 9.6 %
10524	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc dc)	WLAN	8.27	± 9.6 %
10525	AAC	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc dc)	WLAN	8.36	± 9.6 %
10526	AAF	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc dc)	WLAN	8.42	± 9.6 %
10527	AAF	IEEE 802.11ac WiFi (20MHz, MCS2, 99pc dc)	WLAN	8.21	± 9.6 %
10528	AAF	IEEE 802.11ac WiFi (20MHz, MCS3, 99pc dc)	WLAN	8.36	± 9.6 %
10529	AAF	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc dc)	WLAN	8.36	± 9.6 %
10531	AAF	IEEE 802.11ac WiFi (20MHz, MCS6, 99pc dc)	WLAN	8.43	± 9.6 %
10532	AAF	IEEE 802.11ac WiFi (20MHz, MCS7, 99pc dc)	WLAN	8.29	± 9.6 %
10533	AAE	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc dc)	WLAN	8.38	± 9.6 %
10534	AAE	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc dc)	WLAN	8.45	± 9.6 %
10535	AAE	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc dc)	WLAN	8.45	± 9.6 %
10536	AAF	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc dc)	WLAN	8.32	± 9.6 %
10537	AAF	IEEE 802.11ac WiFi (40MHz, MCS3, 99pc dc)	WLAN	8.44	± 9.6 %
10538	AAF	IEEE 802.11ac WiFi (40MHz, MCS4, 99pc dc)	WLAN	8.54	± 9.6 %
10540	AAA	IEEE 802.11ac WiFi (40MHz, MCS6, 99pc dc)	WLAN	8.39	± 9.6 %
10541	AAA	IEEE 802.11ac WiFi (40MHz, MCS7, 99pc dc)	WLAN	8.46	± 9.6 %
10542	AAA	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc dc)	WLAN	8.65	± 9.6 %
10543	AAC	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc dc)	WLAN	8.65	± 9.6 %
10544	AAC	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc dc)	WLAN	8.47	± 9.6 %
10545	AAC	IEEE 802.11ac WiFi (80MHz, MCS1, 99pc dc)	WLAN	8.55	± 9.6 %
10546	AAC	IEEE 802.11ac WiFi (80MHz, MCS2, 99pc dc)	WLAN	8.35	± 9.6 %
10547	AAC	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc dc)	WLAN	8.49	± 9.6 %
10548	AAC	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc dc)	WLAN	8.37	± 9.6 %
10550	AAC	IEEE 802.11ac WiFi (80MHz, MCS6, 99pc dc)	WLAN	8.38	± 9.6 %
10551	AAC	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc dc)	WLAN	8.50	± 9.6 %
10552	AAC	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc dc)	WLAN	8.42	± 9.6 %
10553	AAC	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc dc)	WLAN	8.45	± 9.6 %
10554	AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 99pc dc)	WLAN	8.48	± 9.6 %
10555	AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 99pc dc)	WLAN	8.47	± 9.6 %
10556	AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 99pc dc)	WLAN	8.50	± 9.6 %
10557	AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 99pc dc)	WLAN	8.52	± 9.6 %
10558	AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 99pc dc)	WLAN	8.61	± 9.6 %
10560	AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 99pc dc)	WLAN	8.73	± 9.6 %
10561	AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 99pc dc)	WLAN	8.56	± 9.6 %
10562	AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 99pc dc)	WLAN	8.69	± 9.6 %
10563	AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 99pc dc)	WLAN	8.77	± 9.6 %
10564	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc dc)	WLAN	8.25	± 9.6 %
10565	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc dc)	WLAN	8.45	± 9.6 %

Certificate No:25J02Z000300

Page 15 of 22



In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn

10566	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc dc)	WLAN	8.13	±9.6 %
10567	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc dc)	WLAN	8.00	±9.6 %
10568	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc dc)	WLAN	8.37	±9.6 %
10569	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc dc)	WLAN	8.10	±9.6 %
10570	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc dc)	WLAN	8.30	±9.6 %
10571	AAC	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc dc)	WLAN	1.99	±9.6 %
10572	AAC	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc dc)	WLAN	1.99	±9.6 %
10573	AAC	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc dc)	WLAN	1.98	±9.6 %
10574	AAC	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc dc)	WLAN	1.98	±9.6 %
10575	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc dc)	WLAN	8.59	±9.6 %
10576	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc dc)	WLAN	8.60	±9.6 %
10577	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc dc)	WLAN	8.70	±9.6 %
10578	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc dc)	WLAN	8.49	±9.6 %
10579	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc dc)	WLAN	8.36	±9.6 %
10580	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc dc)	WLAN	8.76	±9.6 %
10581	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc dc)	WLAN	8.35	±9.6 %
10582	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc dc)	WLAN	8.67	±9.6 %
10583	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc dc)	WLAN	8.59	±9.6 %
10584	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc dc)	WLAN	8.60	±9.6 %
10585	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc dc)	WLAN	8.70	±9.6 %
10586	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc dc)	WLAN	8.49	±9.6 %
10587	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc dc)	WLAN	8.36	±9.6 %
10588	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc dc)	WLAN	8.76	±9.6 %
10589	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc dc)	WLAN	8.35	±9.6 %
10590	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc dc)	WLAN	8.67	±9.6 %
10591	AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc dc)	WLAN	8.63	±9.6 %
10592	AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc dc)	WLAN	8.79	±9.6 %
10593	AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc dc)	WLAN	8.64	±9.6 %
10594	AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc dc)	WLAN	8.74	±9.6 %
10595	AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc dc)	WLAN	8.74	±9.6 %
10596	AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc dc)	WLAN	8.71	±9.6 %
10597	AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc dc)	WLAN	8.72	±9.6 %
10598	AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc dc)	WLAN	8.50	±9.6 %
10599	AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc dc)	WLAN	8.79	±9.6 %
10600	AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc dc)	WLAN	8.88	±9.6 %
10601	AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc dc)	WLAN	8.82	±9.6 %
10602	AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc dc)	WLAN	8.94	±9.6 %
10603	AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc dc)	WLAN	9.03	±9.6 %
10604	AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc dc)	WLAN	8.76	±9.6 %
10605	AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc dc)	WLAN	8.97	±9.6 %
10606	AAC	IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc dc)	WLAN	8.82	±9.6 %
10607	AAC	IEEE 802.11ac WiFi (20MHz, MCS0, 90pc dc)	WLAN	8.64	±9.6 %
10608	AAC	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc dc)	WLAN	8.77	±9.6 %
10609	AAC	IEEE 802.11ac WiFi (20MHz, MCS2, 90pc dc)	WLAN	8.57	±9.6 %
10610	AAC	IEEE 802.11ac WiFi (20MHz, MCS3, 90pc dc)	WLAN	8.78	±9.6 %
10611	AAC	IEEE 802.11ac WiFi (20MHz, MCS4, 90pc dc)	WLAN	8.70	±9.6 %
10612	AAC	IEEE 802.11ac WiFi (20MHz, MCS5, 90pc dc)	WLAN	8.77	±9.6 %
10613	AAC	IEEE 802.11ac WiFi (20MHz, MCS6, 90pc dc)	WLAN	8.94	±9.6 %
10614	AAC	IEEE 802.11ac WiFi (20MHz, MCS7, 90pc dc)	WLAN	8.59	±9.6 %
10615	AAC	IEEE 802.11ac WiFi (20MHz, MCS8, 90pc dc)	WLAN	8.82	±9.6 %
10616	AAC	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc dc)	WLAN	8.82	±9.6 %
10617	AAC	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc dc)	WLAN	8.81	±9.6 %
10618	AAC	IEEE 802.11ac WiFi (40MHz, MCS2, 90pc dc)	WLAN	8.58	±9.6 %
10619	AAC	IEEE 802.11ac WiFi (40MHz, MCS3, 90pc dc)	WLAN	8.86	±9.6 %
10620	AAC	IEEE 802.11ac WiFi (40MHz, MCS4, 90pc dc)	WLAN	8.87	±9.6 %
10621	AAC	IEEE 802.11ac WiFi (40MHz, MCS5, 90pc dc)	WLAN	8.77	±9.6 %
10622	AAC	IEEE 802.11ac WiFi (40MHz, MCS6, 90pc dc)	WLAN	8.68	±9.6 %
10623	AAC	IEEE 802.11ac WiFi (40MHz, MCS7, 90pc dc)	WLAN	8.82	±9.6 %
10624	AAC	IEEE 802.11ac WiFi (40MHz, MCS8, 90pc dc)	WLAN	8.96	±9.6 %

Certificate No:25J02Z000300

Page 16 of 22



In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: cmf@caict.ac.cn http://www.caict.ac.cn

10625	AAC	IEEE 802.11ac WiFi (40MHz, MCS9, 90pc dc)	WLAN	8.96	± 9.6 %
10626	AAC	IEEE 802.11ac WiFi (80MHz, MCS0, 90pc dc)	WLAN	8.83	± 9.6 %
10627	AAC	IEEE 802.11ac WiFi (80MHz, MCS1, 90pc dc)	WLAN	8.88	± 9.6 %
10628	AAC	IEEE 802.11ac WiFi (80MHz, MCS2, 90pc dc)	WLAN	8.71	± 9.6 %
10629	AAC	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc dc)	WLAN	8.85	± 9.6 %
10630	AAC	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc dc)	WLAN	8.72	± 9.6 %
10631	AAC	IEEE 802.11ac WiFi (80MHz, MCS5, 90pc dc)	WLAN	8.81	± 9.6 %
10632	AAC	IEEE 802.11ac WiFi (80MHz, MCS6, 90pc dc)	WLAN	8.74	± 9.6 %
10633	AAC	IEEE 802.11ac WiFi (80MHz, MCS7, 90pc dc)	WLAN	8.83	± 9.6 %
10634	AAC	IEEE 802.11ac WiFi (80MHz, MCS8, 90pc dc)	WLAN	8.80	± 9.6 %
10635	AAC	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc dc)	WLAN	8.81	± 9.6 %
10636	AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 90pc dc)	WLAN	8.83	± 9.6 %
10637	AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 90pc dc)	WLAN	8.79	± 9.6 %
10638	AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 90pc dc)	WLAN	8.86	± 9.6 %
10639	AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 90pc dc)	WLAN	8.85	± 9.6 %
10640	AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 90pc dc)	WLAN	8.98	± 9.6 %
10641	AAC	IEEE 802.11ac WiFi (160MHz, MCS5, 90pc dc)	WLAN	9.06	± 9.6 %
10642	AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 90pc dc)	WLAN	9.06	± 9.6 %
10643	AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 90pc dc)	WLAN	8.89	± 9.6 %
10644	AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 90pc dc)	WLAN	9.05	± 9.6 %
10645	AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 90pc dc)	WLAN	9.11	± 9.6 %
10646	AAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Sub=2,7)	LTE-TDD	11.96	± 9.6 %
10647	AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Sub=2,7)	LTE-TDD	11.96	± 9.6 %
10648	AAC	CDMA2000 (1x Advanced)	CDMA2000	3.45	± 9.6 %
10652	AAC	LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.91	± 9.6 %
10653	AAC	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.42	± 9.6 %
10654	AAC	LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.96	± 9.6 %
10655	AAC	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.21	± 9.6 %
10658	AAC	Pulse Waveform (200Hz, 10%)	Test	10.00	± 9.6 %
10659	AAC	Pulse Waveform (200Hz, 20%)	Test	6.99	± 9.6 %
10660	AAC	Pulse Waveform (200Hz, 40%)	Test	3.98	± 9.6 %
10661	AAC	Pulse Waveform (200Hz, 60%)	Test	2.22	± 9.6 %
10662	AAC	Pulse Waveform (200Hz, 80%)	Test	0.97	± 9.6 %
10670	AAC	Bluetooth Low Energy	Bluetooth	2.19	± 9.6 %
10671	AAD	IEEE 802.11ax (20MHz, MCS0, 90pc dc)	WLAN	9.09	± 9.6 %
10672	AAD	IEEE 802.11ax (20MHz, MCS1, 90pc dc)	WLAN	8.57	± 9.6 %
10673	AAD	IEEE 802.11ax (20MHz, MCS2, 90pc dc)	WLAN	8.78	± 9.6 %
10674	AAD	IEEE 802.11ax (20MHz, MCS3, 90pc dc)	WLAN	8.74	± 9.6 %
10675	AAD	IEEE 802.11ax (20MHz, MCS4, 90pc dc)	WLAN	8.90	± 9.6 %
10676	AAD	IEEE 802.11ax (20MHz, MCS5, 90pc dc)	WLAN	8.77	± 9.6 %
10677	AAD	IEEE 802.11ax (20MHz, MCS6, 90pc dc)	WLAN	8.73	± 9.6 %
10678	AAD	IEEE 802.11ax (20MHz, MCS7, 90pc dc)	WLAN	8.78	± 9.6 %
10679	AAD	IEEE 802.11ax (20MHz, MCS8, 90pc dc)	WLAN	8.89	± 9.6 %
10680	AAD	IEEE 802.11ax (20MHz, MCS9, 90pc dc)	WLAN	8.80	± 9.6 %
10681	AAG	IEEE 802.11ax (20MHz, MCS10, 90pc dc)	WLAN	8.62	± 9.6 %
10682	AAF	IEEE 802.11ax (20MHz, MCS11, 90pc dc)	WLAN	8.83	± 9.6 %
10683	AAA	IEEE 802.11ax (20MHz, MCS0, 99pc dc)	WLAN	8.42	± 9.6 %
10684	AAC	IEEE 802.11ax (20MHz, MCS1, 99pc dc)	WLAN	8.26	± 9.6 %
10685	AAC	IEEE 802.11ax (20MHz, MCS2, 99pc dc)	WLAN	8.33	± 9.6 %
10686	AAC	IEEE 802.11ax (20MHz, MCS3, 99pc dc)	WLAN	8.28	± 9.6 %
10687	AAE	IEEE 802.11ax (20MHz, MCS4, 99pc dc)	WLAN	8.45	± 9.6 %
10688	AAE	IEEE 802.11ax (20MHz, MCS5, 99pc dc)	WLAN	8.29	± 9.6 %
10689	AAD	IEEE 802.11ax (20MHz, MCS6, 99pc dc)	WLAN	8.55	± 9.6 %
10690	AAE	IEEE 802.11ax (20MHz, MCS7, 99pc dc)	WLAN	8.29	± 9.6 %
10691	AAB	IEEE 802.11ax (20MHz, MCS8, 99pc dc)	WLAN	8.25	± 9.6 %
10692	AAA	IEEE 802.11ax (20MHz, MCS9, 99pc dc)	WLAN	8.29	± 9.6 %
10693	AAA	IEEE 802.11ax (20MHz, MCS10, 99pc dc)	WLAN	8.25	± 9.6 %
10694	AAA	IEEE 802.11ax (20MHz, MCS11, 99pc dc)	WLAN	8.57	± 9.6 %
10695	AAA	IEEE 802.11ax (40MHz, MCS0, 90pc dc)	WLAN	8.78	± 9.6 %

Certificate No:25J02Z000300

Page 17 of 22



In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: cml@caict.ac.cn http://www.caict.ac.cn

10696	AAA	IEEE 802.11ax (40MHz, MCS1, 90pc dc)	WLAN	8.91	± 9.6 %
10697	AAA	IEEE 802.11ax (40MHz, MCS2, 90pc dc)	WLAN	8.61	± 9.6 %
10698	AAA	IEEE 802.11ax (40MHz, MCS3, 90pc dc)	WLAN	8.89	± 9.6 %
10699	AAA	IEEE 802.11ax (40MHz, MCS4, 90pc dc)	WLAN	8.82	± 9.6 %
10700	AAA	IEEE 802.11ax (40MHz, MCS5, 90pc dc)	WLAN	8.73	± 9.6 %
10701	AAA	IEEE 802.11ax (40MHz, MCS6, 90pc dc)	WLAN	8.86	± 9.6 %
10702	AAA	IEEE 802.11ax (40MHz, MCS7, 90pc dc)	WLAN	8.70	± 9.6 %
10703	AAA	IEEE 802.11ax (40MHz, MCS8, 90pc dc)	WLAN	8.82	± 9.6 %
10704	AAA	IEEE 802.11ax (40MHz, MCS9, 90pc dc)	WLAN	8.56	± 9.6 %
10705	AAA	IEEE 802.11ax (40MHz, MCS10, 90pc dc)	WLAN	8.69	± 9.6 %
10706	AAC	IEEE 802.11ax (40MHz, MCS11, 90pc dc)	WLAN	8.66	± 9.6 %
10707	AAC	IEEE 802.11ax (40MHz, MCS0, 99pc dc)	WLAN	8.32	± 9.6 %
10708	AAC	IEEE 802.11ax (40MHz, MCS1, 99pc dc)	WLAN	8.55	± 9.6 %
10709	AAC	IEEE 802.11ax (40MHz, MCS2, 99pc dc)	WLAN	8.33	± 9.6 %
10710	AAC	IEEE 802.11ax (40MHz, MCS3, 99pc dc)	WLAN	8.29	± 9.6 %
10711	AAC	IEEE 802.11ax (40MHz, MCS4, 99pc dc)	WLAN	8.39	± 9.6 %
10712	AAC	IEEE 802.11ax (40MHz, MCS5, 99pc dc)	WLAN	8.67	± 9.6 %
10713	AAC	IEEE 802.11ax (40MHz, MCS6, 99pc dc)	WLAN	8.33	± 9.6 %
10714	AAC	IEEE 802.11ax (40MHz, MCS7, 99pc dc)	WLAN	8.26	± 9.6 %
10715	AAC	IEEE 802.11ax (40MHz, MCS8, 99pc dc)	WLAN	8.45	± 9.6 %
10716	AAC	IEEE 802.11ax (40MHz, MCS9, 99pc dc)	WLAN	8.30	± 9.6 %
10717	AAC	IEEE 802.11ax (40MHz, MCS10, 99pc dc)	WLAN	8.48	± 9.6 %
10718	AAC	IEEE 802.11ax (40MHz, MCS11, 99pc dc)	WLAN	8.24	± 9.6 %
10719	AAC	IEEE 802.11ax (80MHz, MCS0, 90pc dc)	WLAN	8.81	± 9.6 %
10720	AAC	IEEE 802.11ax (80MHz, MCS1, 90pc dc)	WLAN	8.87	± 9.6 %
10721	AAC	IEEE 802.11ax (80MHz, MCS2, 90pc dc)	WLAN	8.76	± 9.6 %
10722	AAC	IEEE 802.11ax (80MHz, MCS3, 90pc dc)	WLAN	8.55	± 9.6 %
10723	AAC	IEEE 802.11ax (80MHz, MCS4, 90pc dc)	WLAN	8.70	± 9.6 %
10724	AAC	IEEE 802.11ax (80MHz, MCS5, 90pc dc)	WLAN	8.90	± 9.6 %
10725	AAC	IEEE 802.11ax (80MHz, MCS6, 90pc dc)	WLAN	8.74	± 9.6 %
10726	AAC	IEEE 802.11ax (80MHz, MCS7, 90pc dc)	WLAN	8.72	± 9.6 %
10727	AAC	IEEE 802.11ax (80MHz, MCS8, 90pc dc)	WLAN	8.66	± 9.6 %
10728	AAC	IEEE 802.11ax (80MHz, MCS9, 90pc dc)	WLAN	8.65	± 9.6 %
10729	AAC	IEEE 802.11ax (80MHz, MCS10, 90pc dc)	WLAN	8.64	± 9.6 %
10730	AAC	IEEE 802.11ax (80MHz, MCS11, 90pc dc)	WLAN	8.67	± 9.6 %
10731	AAC	IEEE 802.11ax (80MHz, MCS0, 99pc dc)	WLAN	8.42	± 9.6 %
10732	AAC	IEEE 802.11ax (80MHz, MCS1, 99pc dc)	WLAN	8.46	± 9.6 %
10733	AAC	IEEE 802.11ax (80MHz, MCS2, 99pc dc)	WLAN	8.40	± 9.6 %
10734	AAC	IEEE 802.11ax (80MHz, MCS3, 99pc dc)	WLAN	8.25	± 9.6 %
10735	AAC	IEEE 802.11ax (80MHz, MCS4, 99pc dc)	WLAN	8.33	± 9.6 %
10736	AAC	IEEE 802.11ax (80MHz, MCS5, 99pc dc)	WLAN	8.27	± 9.6 %
10737	AAC	IEEE 802.11ax (80MHz, MCS6, 99pc dc)	WLAN	8.36	± 9.6 %
10738	AAC	IEEE 802.11ax (80MHz, MCS7, 99pc dc)	WLAN	8.42	± 9.6 %
10739	AAC	IEEE 802.11ax (80MHz, MCS8, 99pc dc)	WLAN	8.29	± 9.6 %
10740	AAC	IEEE 802.11ax (80MHz, MCS9, 99pc dc)	WLAN	8.48	± 9.6 %
10741	AAC	IEEE 802.11ax (80MHz, MCS10, 99pc dc)	WLAN	8.40	± 9.6 %
10742	AAC	IEEE 802.11ax (80MHz, MCS11, 99pc dc)	WLAN	8.43	± 9.6 %
10743	AAC	IEEE 802.11ax (160MHz, MCS0, 90pc dc)	WLAN	8.94	± 9.6 %
10744	AAC	IEEE 802.11ax (160MHz, MCS1, 90pc dc)	WLAN	9.16	± 9.6 %
10745	AAC	IEEE 802.11ax (160MHz, MCS2, 90pc dc)	WLAN	8.93	± 9.6 %
10746	AAC	IEEE 802.11ax (160MHz, MCS3, 90pc dc)	WLAN	9.11	± 9.6 %
10747	AAC	IEEE 802.11ax (160MHz, MCS4, 90pc dc)	WLAN	9.04	± 9.6 %
10748	AAC	IEEE 802.11ax (160MHz, MCS5, 90pc dc)	WLAN	8.93	± 9.6 %
10749	AAC	IEEE 802.11ax (160MHz, MCS6, 90pc dc)	WLAN	8.90	± 9.6 %
10750	AAC	IEEE 802.11ax (160MHz, MCS7, 90pc dc)	WLAN	8.79	± 9.6 %
10751	AAC	IEEE 802.11ax (160MHz, MCS8, 90pc dc)	WLAN	8.82	± 9.6 %
10752	AAC	IEEE 802.11ax (160MHz, MCS9, 90pc dc)	WLAN	8.81	± 9.6 %
10753	AAC	IEEE 802.11ax (160MHz, MCS10, 90pc dc)	WLAN	9.00	± 9.6 %
10754	AAC	IEEE 802.11ax (160MHz, MCS11, 90pc dc)	WLAN	8.94	± 9.6 %

Certificate No:25J02Z000300

Page 18 of 22



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

10755	AAC	IEEE 802.11ax (160MHz, MCS0, 99pc dc)	WLAN	8.64	± 9.6 %
10756	AAC	IEEE 802.11ax (160MHz, MCS1, 99pc dc)	WLAN	8.77	± 9.6 %
10757	AAC	IEEE 802.11ax (160MHz, MCS2, 99pc dc)	WLAN	8.77	± 9.6 %
10758	AAC	IEEE 802.11ax (160MHz, MCS3, 99pc dc)	WLAN	8.69	± 9.6 %
10759	AAC	IEEE 802.11ax (160MHz, MCS4, 99pc dc)	WLAN	8.58	± 9.6 %
10760	AAC	IEEE 802.11ax (160MHz, MCS5, 99pc dc)	WLAN	8.49	± 9.6 %
10761	AAC	IEEE 802.11ax (160MHz, MCS6, 99pc dc)	WLAN	8.58	± 9.6 %
10762	AAC	IEEE 802.11ax (160MHz, MCS7, 99pc dc)	WLAN	8.49	± 9.6 %
10763	AAC	IEEE 802.11ax (160MHz, MCS8, 99pc dc)	WLAN	8.53	± 9.6 %
10764	AAC	IEEE 802.11ax (160MHz, MCS9, 99pc dc)	WLAN	8.54	± 9.6 %
10765	AAC	IEEE 802.11ax (160MHz, MCS10, 99pc dc)	WLAN	8.54	± 9.6 %
10766	AAC	IEEE 802.11ax (160MHz, MCS11, 99pc dc)	WLAN	8.51	± 9.6 %
10767	AAC	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	7.99	± 9.6 %
10768	AAC	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.01	± 9.6 %
10769	AAC	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.01	± 9.6 %
10770	AAC	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	± 9.6 %
10771	AAC	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	± 9.6 %
10772	AAC	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.23	± 9.6 %
10773	AAC	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.03	± 9.6 %
10774	AAC	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	± 9.6 %
10775	AAC	5G NR (CP-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.31	± 9.6 %
10776	AAC	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.30	± 9.6 %
10777	AAC	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.30	± 9.6 %
10778	AAC	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.34	± 9.6 %
10779	AAC	5G NR (CP-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.42	± 9.6 %
10780	AAC	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	± 9.6 %
10781	AAC	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	± 9.6 %
10782	AAC	5G NR (CP-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.43	± 9.6 %
10783	AAC	5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.31	± 9.6 %
10784	AAC	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.29	± 9.6 %
10785	AAC	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.40	± 9.6 %
10786	AAC	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.35	± 9.6 %
10787	AAC	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.44	± 9.6 %
10788	AAC	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	± 9.6 %
10789	AAC	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.37	± 9.6 %
10790	AAC	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	± 9.6 %
10791	AAC	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.83	± 9.6 %
10792	AAC	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.92	± 9.6 %
10793	AAC	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.95	± 9.6 %
10794	AAC	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	± 9.6 %
10795	AAC	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.84	± 9.6 %
10796	AAC	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	± 9.6 %
10797	AAC	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.01	± 9.6 %
10798	AAC	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.89	± 9.6 %
10799	AAC	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.93	± 9.6 %
10801	AAC	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.89	± 9.6 %
10802	AAC	5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.87	± 9.6 %
10803	AAC	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.93	± 9.6 %
10805	AAD	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	± 9.6 %
10806	AAD	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.37	± 9.6 %
10809	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	± 9.6 %
10810	AAD	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	± 9.6 %
10812	AAD	5G NR (CP-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.35	± 9.6 %
10817	AAD	5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.35	± 9.6 %
10818	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	± 9.6 %
10819	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.33	± 9.6 %
10820	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.30	± 9.6 %
10821	AAC	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	± 9.6 %
10822	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	± 9.6 %

Certificate No:25J02Z000300

Page 19 of 22



In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn

10823	AAC	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.36	± 9.6 %
10824	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.39	± 9.6 %
10825	AAD	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	± 9.6 %
10827	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.42	± 9.6 %
10828	AAE	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.43	± 9.6 %
10829	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.40	± 9.6 %
10830	AAD	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.63	± 9.6 %
10831	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.73	± 9.6 %
10832	AAD	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.74	± 9.6 %
10833	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	± 9.6 %
10834	AAD	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.75	± 9.6 %
10835	AAD	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	± 9.6 %
10836	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.66	± 9.6 %
10837	AAD	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.68	± 9.6 %
10839	AAD	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	± 9.6 %
10840	AAD	5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.67	± 9.6 %
10841	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.71	± 9.6 %
10843	AAD	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.49	± 9.6 %
10844	AAD	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	± 9.6 %
10846	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	± 9.6 %
10854	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	± 9.6 %
10855	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.36	± 9.6 %
10856	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	± 9.6 %
10857	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.35	± 9.6 %
10858	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.36	± 9.6 %
10859	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	± 9.6 %
10860	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	± 9.6 %
10861	AAD	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.40	± 9.6 %
10863	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	± 9.6 %
10864	AAE	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	± 9.6 %
10865	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	± 9.6 %
10866	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 9.6 %
10868	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.89	± 9.6 %
10869	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.75	± 9.6 %
10870	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.86	± 9.6 %
10871	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	5.75	± 9.6 %
10872	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.52	± 9.6 %
10873	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.61	± 9.6 %
10874	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.65	± 9.6 %
10875	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7.78	± 9.6 %
10876	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.39	± 9.6 %
10877	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	7.95	± 9.6 %
10878	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.41	± 9.6 %
10879	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.12	± 9.6 %
10880	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.38	± 9.6 %
10881	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.75	± 9.6 %
10882	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.96	± 9.6 %
10883	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.57	± 9.6 %
10884	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.53	± 9.6 %
10885	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.61	± 9.6 %
10886	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.65	± 9.6 %
10887	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7.78	± 9.6 %
10888	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.35	± 9.6 %
10889	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.02	± 9.6 %
10890	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.40	± 9.6 %
10891	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.13	± 9.6 %
10892	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.41	± 9.6 %
10897	AAD	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.66	± 9.6 %
10898	AAD	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	± 9.6 %

Certificate No:25J02Z000300

Page 20 of 22



In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn

10899	AAD	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	±9.6 %
10900	AAD	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6 %
10901	AAD	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6 %
10902	AAD	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6 %
10903	AAD	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6 %
10904	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6 %
10905	AAD	5G NR (DFT-s-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6 %
10906	AAD	5G NR (DFT-s-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6 %
10907	AAD	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.78	±9.6 %
10908	AAD	5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.93	±9.6 %
10909	AAD	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.96	±9.6 %
10910	AAD	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	±9.6 %
10911	AAD	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.93	±9.6 %
10912	AAD	5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6 %
10913	AAD	5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6 %
10914	AAD	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.85	±9.6 %
10915	AAD	5G NR (DFT-s-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	±9.6 %
10916	AAD	5G NR (DFT-s-OFDM, 50% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	±9.6 %
10917	AAD	5G NR (DFT-s-OFDM, 50% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	±9.6 %
10918	AAD	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	±9.6 %
10919	AAD	5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	±9.6 %
10920	AAD	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	±9.6 %
10921	AAD	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6 %
10922	AAD	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.82	±9.6 %
10923	AAD	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6 %
10924	AAD	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6 %
10925	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.95	±9.6 %
10926	AAD	5G NR (DFT-s-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6 %
10927	AAD	5G NR (DFT-s-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	±9.6 %
10928	AAD	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	±9.6 %
10929	AAD	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	±9.6 %
10930	AAD	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	±9.6 %
10931	AAD	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6 %
10932	AAB	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6 %
10933	AAA	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6 %
10934	AAA	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6 %
10935	AAA	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6 %
10936	AAC	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.90	±9.6 %
10937	AAB	5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.77	±9.6 %
10938	AAB	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.90	±9.6 %
10939	AAB	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.82	±9.6 %
10940	AAB	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.89	±9.6 %
10941	AAB	5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.83	±9.6 %
10942	AAB	5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	±9.6 %
10943	AAB	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.95	±9.6 %
10944	AAB	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.81	±9.6 %
10945	AAB	5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	±9.6 %
10946	AAC	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.83	±9.6 %
10947	AAB	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.87	±9.6 %
10948	AAB	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	±9.6 %
10949	AAB	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.87	±9.6 %
10950	AAB	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	±9.6 %
10951	AAB	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.92	±9.6 %
10952	AAB	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.25	±9.6 %
10953	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.15	±9.6 %
10954	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.23	±9.6 %
10955	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.42	±9.6 %
10956	AAB	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.14	±9.6 %
10957	AAC	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.31	±9.6 %

Certificate No:25J02Z000300

Page 21 of 22



In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

10958	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.61	± 9.6 %
10959	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.33	± 9.6 %
10960	AAB	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.32	± 9.6 %
10961	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.36	± 9.6 %
10962	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.40	± 9.6 %
10963	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.55	± 9.6 %
10964	AAB	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.29	± 9.6 %
10965	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.37	± 9.6 %
10966	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.55	± 9.6 %
10967	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.42	± 9.6 %
10968	AAB	5G NR DL (CP-OFDM, TM 3.1, 100 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.49	± 9.6 %
10972	AAB	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	11.59	± 9.6 %
10973	AAB	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	9.06	± 9.6 %
10974	AAB	5G NR (CP-OFDM, 100% RB, 100 MHz, 256-QAM, 30 kHz)	5G NR FR1 TDD	10.28	± 9.6 %
10978	AAA	ULLA BDR	ULLA	1.16	± 9.6 %
10979	AAA	ULLA HDR4	ULLA	8.58	± 9.6 %
10980	AAA	ULLA HDR8	ULLA	10.32	± 9.6 %
10981	AAA	ULLA HDRp4	ULLA	3.19	± 9.6 %
10982	AAA	ULLA HDRp8	ULLA	3.43	± 9.6 %
10983	AAC	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.31	± 9.6 %
10984	AAB	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.42	± 9.6 %
10985	AAC	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.54	± 9.6 %
10986	AAB	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.50	± 9.6 %
10987	AAC	5G NR DL (CP-OFDM, TM 3.1, 60 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.53	± 9.6 %
10988	AAB	5G NR DL (CP-OFDM, TM 3.1, 70 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.38	± 9.6 %
10989	AAC	5G NR DL (CP-OFDM, TM 3.1, 80 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.33	± 9.6 %
10990	AAB	5G NR DL (CP-OFDM, TM 3.1, 90 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.52	± 9.6 %
11003	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	10.24	± 9.6 %
11004	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	10.73	± 9.6 %
11005	AAA	5G NR DL (CP-OFDM, TM 3.1, 25 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.70	± 9.6 %
11006	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.55	± 9.6 %
11007	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.46	± 9.6 %
11008	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.51	± 9.6 %
11009	AAA	5G NR DL (CP-OFDM, TM 3.1, 25 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.76	± 9.6 %
11010	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.95	± 9.6 %
11011	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.96	± 9.6 %
11012	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.68	± 9.6 %
11013	AAB	IEEE 802.11be (320MHz, MCS1, 99pc duty cycle)	WLAN	8.47	± 9.6 %
11014	AAB	IEEE 802.11be (320MHz, MCS2, 99pc duty cycle)	WLAN	8.45	± 9.6 %
11015	AAB	IEEE 802.11be (320MHz, MCS3, 99pc duty cycle)	WLAN	8.44	± 9.6 %
11016	AAB	IEEE 802.11be (320MHz, MCS4, 99pc duty cycle)	WLAN	8.44	± 9.6 %
11017	AAB	IEEE 802.11be (320MHz, MCS5, 99pc duty cycle)	WLAN	8.41	± 9.6 %
11018	AAB	IEEE 802.11be (320MHz, MCS6, 99pc duty cycle)	WLAN	8.40	± 9.6 %
11019	AAB	IEEE 802.11be (320MHz, MCS7, 99pc duty cycle)	WLAN	8.29	± 9.6 %
11020	AAB	IEEE 802.11be (320MHz, MCS8, 99pc duty cycle)	WLAN	8.27	± 9.6 %
11021	AAB	IEEE 802.11be (320MHz, MCS9, 99pc duty cycle)	WLAN	8.46	± 9.6 %
11022	AAB	IEEE 802.11be (320MHz, MCS10, 99pc duty cycle)	WLAN	8.36	± 9.6 %
11023	AAB	IEEE 802.11be (320MHz, MCS11, 99pc duty cycle)	WLAN	8.09	± 9.6 %
11024	AAB	IEEE 802.11be (320MHz, MCS12, 99pc duty cycle)	WLAN	8.42	± 9.6 %
11025	AAB	IEEE 802.11be (320MHz, MCS13, 99pc duty cycle)	WLAN	8.37	± 9.6 %
11026	AAB	IEEE 802.11be (320MHz, MCS0, 99pc duty cycle)	WLAN	8.39	± 9.6 %

* Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.